


Section 32 Evaluation Noise

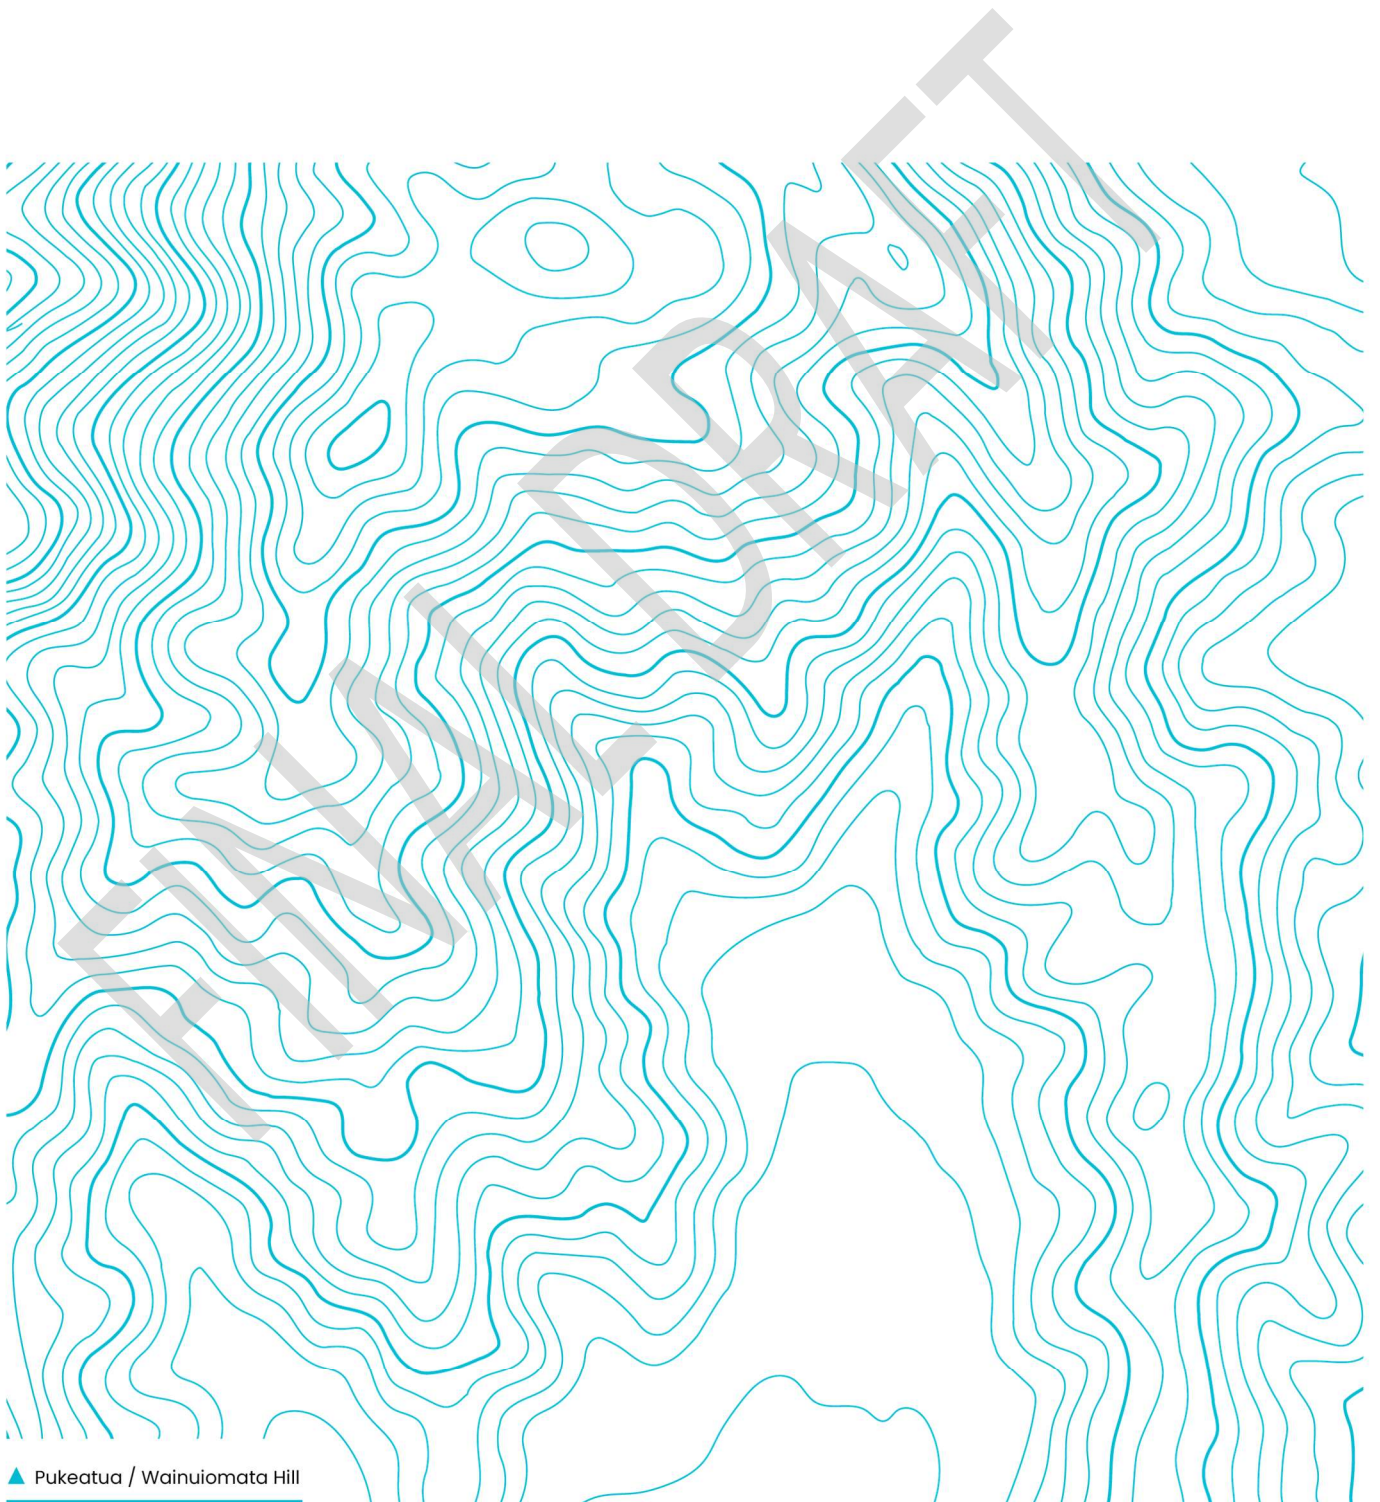

1 Contents

1	Contents.....	2
2	Overview and Purpose	4
2.1	Noise and district plans	4
3	Statutory and Policy Context.....	5
3.1	Resource Management Act 1991.....	5
3.1.1	Section 5 – Purpose and Principles.....	5
3.1.2	Section 6 – Matters of National Importance	5
3.1.3	Section 7 – Other Matters	6
3.1.4	Section 8 – Treaty of Waitangi.....	6
3.1.5	Other provisions.....	7
3.2	National Policy Statements	7
3.3	National environmental standards	11
3.4	National Planning Standards	11
3.5	Regional Policy Statement for the Wellington Region	12
3.6	Hutt City Council plans, policies, and strategies	15
3.7	District plans of adjacent territorial authorities	16
3.8	Other legislation or regulations	17
4	Resource management issues	19
4.1	Introduction to resource management issues	19
4.2	Evidence base.....	19
4.2.1	Existing approach of City of Lower Hutt District Plan.....	21
4.2.2	Analysis of other District Plans	22
4.2.3	Advice from mana whenua.....	23
4.2.4	Stakeholder and community engagement.....	23

4.3	Summary of resource management issues	25
5	Scale and significance assessment.....	26
6	Proposed District Plan objectives and provisions.....	28
7	Evaluation of objectives.....	31
7.1	Evaluation of NOISE-O1 (adverse effects of noise)	31
7.2	Evaluation of NOISE-O2 (reverse sensitivity).....	33
8	Evaluation of Policies and Rules/Methods.....	35
8.1	Background.....	35
8.2	Notes.....	36
8.3	Evaluation of provisions.....	37
8.3.1	Provisions that implement NOISE-O1.....	37
8.3.2	Provisions that implement NOISE-O2.....	40
9	Summary.....	44
10	Attachments.....	45
10.1	Attachment 1: Noise and Vibration Review – Malcolm Hunt Associates.....	46
10.2	Attachment 2: Recommended State Highway & Wairarapa Rail Line Noise Overlays for Reverse Sensitivity Noise Protection Measures – Hutt City Proposed District Plan – Malcolm Hunt Associates.....	47
10.3	Attachment 3: State Highway Noise Control Boundary Overlay – Chiles Ltd.	48

2 Overview and Purpose

- (1) Hutt City Council is reviewing the City of Lower Hutt District Plan. This is a full review of the District Plan, including the approach to noise.
- (2) This report is a record of the review with regard to noise, and includes an evaluation of objectives and provisions for a proposed District Plan to address noise, in accordance with the requirements of s32 of the Resource Management Act 1991.
- (3) This report sits as one of a package of reports for the proposed Plan and should be read alongside the plan-wide report for matters common to all Plan topics.

2.1 Noise and district plans

- (4) Excessive noise can have a range of impacts on safety, health, the social environment, and the natural environment. This ranges from simple annoyance to interference with speech and job performance, up to direct impacts on mental and physical health through stress and sleep disturbance.
- (5) As set out in the RMA, noise “includes vibration”.
- (6) The Noise chapter follows the issues set out to be covered in the National Planning Standards, and so the chapter covers:
 - noise provisions (including noise limits) for zones, receiving environments and other spatially defined areas,
 - requirements for common significant noise generating activities – in this plan, construction activities, temporary activities, and helicopter landing areas,
 - provision addressing vibration, and
 - provisions requiring noise insulation to address reverse sensitivity in commercial and industrial areas and near busy highways and railways.

3 Statutory and Policy Context

- (7) The following sections discuss the national, regional and local policy framework that are particularly relevant to the statutory and policy context for noise for the District Plan Review.

3.1 Resource Management Act 1991

3.1.1 Section 5 – Purpose and Principles

- (8) The purpose of the RMA is set out in Section 5. The purpose is to promote the sustainable management of natural and physical resources.
- (9) Under s5(2) of the Act, sustainable management means:

managing the use, development, and protection of natural and physical resources in a way, or at a rate, which enables people and communities to provide for their social, economic, and cultural well-being and for their health and safety while—

- (a) *sustaining the potential of natural and physical resources (excluding minerals) to meet the reasonably foreseeable needs of future generations; and*
- (b) *safeguarding the life-supporting capacity of air, water, soil, and ecosystems; and*
- (c) *avoiding, remedying, or mitigating any adverse effects of activities on the environment.*

- (10) The key connection of the Noise chapter with the purpose of the Act is in the impact of adverse effects of noise on people and communities' ability to provide for their social well-being and health.

3.1.2 Section 6 – Matters of National Importance

- (11) Section 6 of the RMA sets out matters of national importance that all persons exercising functions and powers under the Act shall *recognise and provide for* in achieving the purpose of the RMA. There are no relevant s6 matters for noise.

3.1.3 Section 7 – Other Matters

- (12) Section 7 of the RMA sets out other matters that all persons exercising functions and powers under it shall *have particular regard to* in achieving the purpose of the RMA. The relevant s7 matters for noise are:

Section	Relevant Matter
7(c)	<p><i>“the maintenance and enhancement of amenity values”</i></p> <p>One of the components of amenity values, particularly in residential, rural, and natural open space areas, is tranquillity. Moderately loud noises, or noises with particularly annoying characteristics during the day may not be a health risk but are an annoyance and detract from people’s enjoyment of the area.</p>
7(f)	<p><i>“maintenance and enhancement of the quality of the environment”</i></p> <p>The acoustic environment is a part of the environment and a goal of the RMA is that its quality should be maintained and enhanced (while acknowledging this may trade off against other values).</p>

3.1.4 Section 8 – Treaty of Waitangi

- (13) Section 8 of the RMA requires Council to take into account the principles of the Treaty of Waitangi when exercising functions and powers under the Act.
- (14) Council has engaged with Mana Whenua of Lower Hutt as part of the District Plan Review, including with representatives of Taranaki Whānui ki te Upoko o te Ika (Port Nicholson Block Settlement Trust), Wellington Tenth

Trust, Palmerston North Māori Reserve Trust, Te Rūnanganui o Te Āti Awa ki Te Upoko o Te Ika a Māui Incorporated and Te Rūnanga o Toa Rangatira Incorporated.

- (15) This engagement has demonstrated two key principles of the treaty, the first being the principle of partnership by, recognising and fostering mutual good faith with our existing iwi partnerships and continuing to provide the opportunities for tangata whenua to input meaningfully into the approach to Noise issues.
- (16) Secondly, the principle of active protection is another key aspect of the treaty principles demonstrated, as it seeks ways to deliver mixed and culturally dynamic communities in a sustainable way.

3.1.5 Other provisions

- (17) The RMA has special treatment for noise which affects the structure and effect of the proposed chapter. Particularly relevant are:
- Section 16 – a general duty to avoid unreasonable noise,
 - Section 31(1)(d) – Council duty to control the emission of noise and mitigate its effects, and
 - Sections 326 to 328 – special enforcement provisions for noise
- (18) These mean that the exact wording of provisions and numeric limits is of less relevance than it might otherwise be, as enforcement is not limited to technical breaches of District Plan rules. Enforcement can also be taken against any avoidable unreasonable noise.

3.2 National Policy Statements

- (19) Section 75(3)(a) of the RMA requires district plans to give effect to any national policy statement. The following national policy statements are particularly relevant for noise:
- National Policy Statement for Renewable Electricity Generation 2011 (NPS-REG)
 - National Policy Statement on Urban Development 2020 (NPS-UD)
- (20) The relevant objectives and policies of these national policy statements are discussed below:

Reference	Comment
NPS-REG Policy D	<p data-bbox="576 327 1394 510"><i>“Decision-makers shall, to the extent reasonably possible, manage activities to avoid reverse sensitivity effects on consented and on existing renewable electricity generation activities.”</i></p> <p data-bbox="576 562 1394 943">This policy means the Council should manage activities that could have reverse sensitivity effects on consented and existing renewable electricity generation activities. While there are no significant such generation activities at present, if they are consented, managing the reverse sensitivity effects of noise-sensitive activities will be an important issue and the objectives and policies of the plan should anticipate that.</p>
NPS-UD Objective 1	<p data-bbox="576 1005 1362 1189"><i>“New Zealand has well-functioning urban environments that enable all people and communities to provide for their social, economic, and cultural wellbeing, and for their health and safety, now and into the future.”</i></p> <p data-bbox="576 1240 1378 1368">The reference to health in urban environments reinforces the role of avoiding excessive noise in contributing to health outcomes.</p>
NPS-UD Objective 3	<p data-bbox="576 1435 1378 1619"><i>“Regional policy statements and district plans enable more people to live in, and more businesses and community services to be located in, areas of an urban environment in which one or more of the following apply:</i></p> <p data-bbox="676 1671 1347 1753"><i>(a) the area is in or near a centre zone or other area with many employment opportunities</i></p> <p data-bbox="676 1805 1394 1888"><i>(b) the area is well-serviced by existing or planned public transport</i></p>

	<p><i>(c) there is high demand for housing or for business land in the area, relative to other areas within the urban environment."</i></p> <p>Enabling more people to live in and near centre zones and near public transport provided using the rail corridor will expose them to increased noise. Managing reverse sensitivity effects will aid this objective in being achieved.</p>
<p>NPS-UD Objective 4</p>	<p><i>"New Zealand's urban environments, including their amenity values, develop and change over time in response to the diverse and changing needs of people, communities, and future generations."</i></p> <p>Relevant in considering how the acoustic environment contributes to amenity values.</p>
<p>NPS-UD Policy 1</p>	<p><i>"Planning decisions contribute to well-functioning urban environments, which are urban environments that, as a minimum:</i></p> <p><i>(a) have or enable a variety of homes that:</i></p> <p><i>(i) meet the needs, in terms of type, price, and location, of different households; and</i></p> <p><i>(ii) enable Māori to express their cultural traditions and norms; and</i></p> <p><i>(b) have or enable a variety of sites that are suitable for different business sectors in terms of location and site size; and</i></p> <p><i>(c) have good accessibility for all people between housing, jobs, community services, natural spaces, and open spaces, including by way of public or active transport; and</i></p>

	<p><i>(d) support, and limit as much as possible adverse impacts on, the competitive operation of land and development markets; and</i></p> <p><i>(e) support reductions in greenhouse gas emissions; and</i></p> <p><i>(f) are resilient to the likely current and future effects of climate change.”</i></p> <p>Enabling more people to live in and near centre zones and near public transport provided the rail corridor will expose them to increased noise. Managing reverse sensitivity effects will aid this objective in being achieved.</p>
<p>NPS-UD Policy 6</p>	<p><i>“When making planning decisions that affect urban environments, decision-makers have particular regard to the following matters:</i></p> <p><i>(a) the planned urban built form anticipated by those RMA planning documents that have given effect to this National Policy Statement</i></p> <p><i>(b) that the planned urban built form in those RMA planning documents may involve significant changes to an area, and those changes:</i></p> <p><i>(i) may detract from amenity values appreciated by some people but improve amenity values appreciated by other people, communities, and future generations, including by providing increased and varied housing densities and types; and</i></p> <p><i>(ii) are not, of themselves, an adverse effect</i></p>

	<p><i>(c) the benefits of urban development that are consistent with well-functioning urban environments (as described in Policy 1)</i></p> <p><i>(d) any relevant contribution that will be made to meeting the requirements of this National Policy Statement to provide or realise development capacity</i></p> <p><i>(e) the likely current and future effects of climate change.”</i></p> <p>Relevant in considering how the acoustic environment contributes to amenity values.</p>
--	---

3.3 National environmental standards

(21) The following national environmental standards are particularly relevant for noise:

- Resource Management (National Environmental Standards for Electricity Transmission Activities) Regulations 2009
- Resource Management (National Environmental Standards for Telecommunication Facilities) Regulations 2016

(22) These national environmental standards contain specific provisions around noise for specific activities. The proposed District Plan does not affect these. These NESs are also covered in more detail in the evaluation report for the Infrastructure chapter.

3.4 National Planning Standards

(23) Section 75(3)(ba) of the Act requires district plans to give effect to national planning standards.

(24) The National Planning Standards include specific requirements about noise in:

- Standard 7 – District-wide matters
- Standard 13 – Mapping
- Standard 14 – Definitions
- Standard 15 – Noise and Vibration Metrics

(25) These standards set out where noise-related provisions must be located. Accordingly, the Noise chapter in the proposed District Plan, and this report, cover the following issues:

- Noise provisions including noise limits for specific activities, source areas, and receiving environments,
- Requirements for common significant noise-generating activities (in this plan, construction activities, temporary activities, and helicopter landing areas), and
- Sound insulation requirements for sensitive activities.

(26) The Noise chapter and this report cover noise as it relates to energy, infrastructure, and transport only in terms of the general provisions that apply to all activities. Those chapters in some cases also provide additional provisions relating to noise specific to their own topics - where this is the case, those provisions are located in those other chapters, and their respective s32 reports.

(27) The Noise and Vibration Metrics standard also sets out requirements for the measurement and assessment of noise levels. For more detail on how this is applied, see Attachment 1.

3.5 Regional Policy Statement for the Wellington Region

(28) Section 75(3)(c) of the RMA requires the District Plan to give effect to the Regional Policy Statement for the Wellington Region ('the RPS'). The RPS identifies the significant resource management issues for the region and outlines the policies and methods required to achieve the integrated sustainable management of the region's natural and physical resources.

(29) There is currently a proposed RPS in the form of Proposed RPS Change 1, a sweeping series of amendments on a number of topics including indigenous biodiversity and climate change. At time of writing, the

proposed RPS had received decisions from the Regional Council but was still subject to appeal, so there is still uncertainty over the final form of the change. The RPS change will not meaningfully impact the issue of noise.

(30) The relevant objectives and policies of the RPS for noise are discussed below:

Reference	Comment
Objective 10	"The social, economic, cultural and environmental, benefits of regionally significant infrastructure are recognised and protected."
Objective 22	<p>"A compact, well-designed, climate-resilient, accessible, and environmentally responsive regional form with well-functioning urban areas and rural areas, where:</p> <p>(a) there is sufficient development capacity to meet the needs of current and future generations, improve housing affordability and quality, and provide access to a diversity of housing typologies within neighbourhoods which enable choice; and</p> <p>...</p> <p>(d) intensification occurs within existing urban zones in appropriate places where it is environmentally responsive; and</p> <p>...</p> <p>(i) existing urban-zoned land, and infrastructure capacity is used effectively and efficiently; and</p> <p>...</p> "

	<p>(k) development densities are sufficient to support the provision and ongoing maintenance of infrastructure; and</p> <p>(l) a variety of residential, commercial, mixed use and industrial development in appropriate locations is provided which contributes to viable and vibrant centres at a range of scales, and industrial-based employment locations; and</p> <p>(m) the safe and efficient operation of regionally significant infrastructure is protected from potential reverse sensitivity effects.”</p> <p>This policy requires the Plan to manage effects necessary to ensure intensification and efficient use of land, such as noise from activities in close proximity, and protect regionally significant infrastructure from incompatible development.</p>
<p>Policy 8</p>	<p>“District and regional plans shall include policies and rules that protect regionally significant infrastructure from incompatible new subdivision, use and development occurring under, over, or adjacent to the infrastructure.”</p> <p>This policy requires the Plan to protect regionally significant infrastructure from incompatible development. The Noise chapter addresses this for noise reverse sensitivity issues.</p>
<p>Policy 30</p>	<p>“District plans shall include objectives, policies, rules and/or methods that enable and manage appropriate subdivision, use and development that maintains and enhances the viability and vibrancy of...other regionally significant centres:...</p>

	<p>(ii) Lower Hutt;</p> <p>...</p> <p>(viii) Petone”</p> <p>This policy requires the plan to enable development that enhances viability and vibrancy of the two key centres in the district. This includes ensuring that development is not unnecessarily hindered by noise-sensitive activities.</p>
Policy 60	<p>“When considering [a district plan], particular regard shall be given to: ...</p> <p>(b) protecting significant mineral resources from incompatible or inappropriate land uses alongside.”</p> <p>This policy requires the Plan to protect regionally mineral resources from incompatible development that would constrain their extraction. The Noise chapter and Quarry Zone chapters address this for noise reverse sensitivity issues.</p>

3.6 Hutt City Council plans, policies, and strategies

- (31) Section 74(2)(b)(i) of the RMA requires the Council to have regard to management plans and strategies prepared under other Acts. In addition, there are other plans, policies and strategies of Council that should be considered as part of the District Plan Review as they set Council’s intentions on some matters that need to be addressed through the District Plan Review.
- (32) The following Council plans, policies and strategies are relevant for noise:
- Arts and Culture Policy 2016 (non-statutory)
 - Local Alcohol Policy 2018 (statutory)

(33) These plans, policies and strategies are discussed below:

Plan/Policy/Strategy	Comment
Arts and Culture Policy 2016	<p>This policy aims to promote the arts in the city. Particularly relevant to the noise topic is objective 1.1.8(i), “reduce or remove “red tape” to enable artistic performance in different environments particularly musical performance”.</p> <p>In evaluating noise provisions, we consider how they will impact performing arts including live music.</p>
Local Alcohol Policy 2018	<p>This is a statutory policy under the Sale and Supply of Alcohol Act 2012 and governs the issue of liquor licences in the city. The policy specifically provides for the use of noise management plans for liquor licences in the city.</p> <p>In evaluating noise provisions, we consider that the unique noise characteristics of licenced premises can also be controlled under the liquor licensing process.</p>

3.7 District plans of adjacent territorial authorities

(34) Section 74(2)(c) of the RMA requires the Council to have regard to the extent to which the District Plan needs to be consistent with the plans or proposed plans of adjacent territorial authorities.

(35) It is rare that noise presents a cross-boundary issue. However, as a relatively technical matter with a regional market for specialists and many

land users operating in multiple districts in the region, it is worth noting that many plan users will operate under multiple plans in the region, and it is worth considering benefits to plan usability from regional consistency. This is discussed further in section 4.2.2.

3.8 Other legislation or regulations

(36) In addition to the RMA, other legislation and regulations can be relevant considerations for a district plan, particularly where management of an issue is addressed through multiple pieces of legislation and regulatory bodies.

(37) The following other legislation and regulations are relevant for noise:

- Building Act 2004 (Building Code)
- Health Act 1956

(38) These are discussed below.

Act or Regulation	Comments
Building Act 2004 and Building Code (Schedule 1 of the Building Regulations 1992)	Clause G4 – Ventilation Clause G6 – Airborne and Impact Sounds Contain building code requirements for intertenancy (but not exterior) soundproofing and consequent ventilation. Requirements for sound-proofing in the plan should take these requirements into account.
Health Act 1956 ss29-35	Defines a list of nuisances, including noise and vibration, and provides procedures for managing those nuisances. While powers under the Health Act could be used to manage noise, the more specific

	powers in the Resource Management Act are generally more practical for the Council.
--	---

FINAL DRAFT

4 Resource management issues

4.1 Introduction to resource management issues

- (39) Many activities unavoidably generate some noise. Noise can have adverse effects, particularly on people's health and wellbeing such as sleep disturbance and annoyance. Noise also impacts on amenity values.
- (40) However, the negative effects of noise need to be balanced against the need for those activities and considered in the context of existing background noise. The level of acceptability of noise or sensitivity to noise varies between different areas within the city, the characteristics of the noise, and the needs of the activity.
- (41) Noise is reasonably well established as a domain of planning and has specific legislative treatment in the RMA. The issues involved in managing noise are well understood and often codified in technical standards. There is significant external guidance.

4.2 Evidence base

- (42) The development of the noise chapter centres a technical review of the operative plan and emerging issues, and an ambient noise survey of the district to inform the development of the plan chapter and provide a base for future monitoring. This document, the *Hutt City Council – Proposed District Plan Noise and Vibration Review (the "Hunt report", attachment 1)* prepared by Malcolm Hunt Associates should be read alongside this section 32 report. It also includes significantly more detail describing:
- The approach of the operative plan
 - The effects of noise on the environment
 - Reverse sensitivity issues for commercial centres, highways, and railways

- The application of technical standards (Australian/New Zealand, and international)
 - The track record of noise complaints in the district
 - A survey of ambient noise levels in different environments in the district
 - Recommendations for improvements to the district plan
- (43) This report is the key resource for the review of noise provisions.
- (44) Further advice from Malcolm Hunt Associates covers specific advice on the appropriate distances for reverse sensitivity overlays for railways and highways, after feedback from NZTA and KiwiRail (attachment 2).
- (45) Regard should also be had to the technical standards prescribed in the National Planning Standards for the management of noise:
- New Zealand Standard 6801:2008 Acoustics – Measurement of environmental sound
 - New Zealand Standard 6802:2008 Acoustics – Environmental noise
 - New Zealand Standard 6803:1999 Acoustics – Construction noise
 - New Zealand Standard 6807:1994 – Noise Management and Land Use Planning for Helicopter Landing Areas
- (46) These documents are incorporated by reference in the proposed plan.
- (47) All these documents provide further references in support of their conclusions and recommendations.
- (48) Council has had to make assumptions around the likely future noise levels on the rail and highway network. For this specific purpose, it has considered the policy direction set out in:
- The Regional Land Transport Plan (2024 update),
 - The Regional Public Transport Plan 2021,
 - *Urutau, ka taurikura: Kia tū pakari a Aotearoa i ngā huringa āhuarangi: Adapt and thrive: Building a climate-resilient New Zealand – New Zealand's first national adaptation plan* (Ministry for the Environment, 2022), and
 - Feedback from KiwiRail.
- (49) In addition, Council has considered:

- The *Compendium of WHO and other UN guidance on health and environment, Chapter 11: Environmental noise* (World Health Organisation, 2022), in setting specific decibel limits in NOISE-APPI,
- Advice and feedback from Council's Environmental Health team, responsible for noise monitoring and enforcement,
- Submissions and other feedback from infrastructure operators (Kiwirail and NZTA) in the preparation of this plan and in earlier plan change processes, including modelling of highway noise levels provided by NZTA (see attachment 3),
- Historic complaints about noise from the public, and
- Feedback from the public on the draft district plan.

4.2.1 Existing approach of City of Lower Hutt District Plan

(50) The operative plan handles issues of noise largely in a dedicated Noise chapter (14C), although issues around infrastructure are partly managed in the Network Utilities chapter (13), and reverse sensitivity issues are managed within the Transport (14A) and some individual activity area chapters.

(51) Noise objectives seek:

- To maintain and enhance the amenity values anticipated in each activity area,
- To ensure residential activities in mixed zones recognise and provide for the potential noise effects of non-residential activities, and
- To provide for infrastructure while managing reverse sensitivity effects (this objective sits in the Transport chapter).

(52) To these ends, policies and rules set out:

- Permitted levels of noise, based on the activity causing the noise, time, date, and area of the sending and receiving sites,
- Exemptions to these standards,
- Measurement procedures,
- Providing for breaches of noise limits as a discretionary activity with no specific policy guidance or matters of discretion, and

- Requirements for noise insulation for sensitive near highways, railways, and within commercial centres.

(53) The operative plan’s approach to noise combines complexity in terms of rule differences in different areas and situations, with very limited policy guidance for resource consents for breaches of the rules.

(54) Further assessment of the operative plan approach, its benefits, and limitations, is included in the Hunt Report.

4.2.2 Analysis of other District Plans

(55) The relevance of the plans of adjacent councils (and Kāpiti Coast) is discussed below:

Plan	Relevance
Proposed Wellington District Plan 2022	High - a relatively recent National Planning Standards-compliant plan, with a comparable policy approach, and dealing with a similar context and issues.
Proposed Porirua District Plan 2020	High - a relatively recent National Planning Standards-compliant plan, with a comparable policy approach, and dealing with a similar context and issues.
Kāpiti Coast District Plan 2021	Moderate - a relatively recent and mostly National Planning Standards-compliant plan although with quite a different structure and dealing with a quite different context and issues.
Proposed Wairarapa Combined District Plan 2023	Moderate - a relatively recent National Planning Standards-compliant plan although dealing with a quite different context and issues and a significantly different policy direction.

Upper Hutt District Plan 2004	Low – the plan is dated and does not fully comply with the National Planning Standards direction for noise.
-------------------------------	---

- (56) These plans have been considered only at a fairly detailed level, where plan usability can be enhanced by ensuring that where similar provisions are used, they are aligned in terms of definitions, wording, units, and so on. This is where the key benefit of regional consistency is provided – for people who operate across the region, they can become familiar with the details more readily and apply experience earned in other district.
- (57) There is no particular need for high-level consistency or a region-wide policy approach, given the local and non-strategic nature of the issue, although given the nature of noise as an issue and the general provisions of the RMA, the provisions do naturally converge to a significant degree. All of those plans include objectives and policies around adverse effects of noise, numeric limits and assessment standards based on the NZS 6800-series of standards, and noise insulation and ventilation requirements for reasons of reverse sensitivity.

4.2.3 Advice from mana whenua

- (58) Council has engaged with mana whenua on the district plan review through the Kāhui Mana Whenua engagement group. No specific issues have been raised with regard to the topic of noise.

4.2.4 Stakeholder and community engagement

- (59) As part of the District Plan Review, Council engaged with the community and stakeholders in several rounds:

Date	Invitees	Summary
2020	General public	General comment was received from several members of the community.

2023	Stakeholders and general public	Specific comment was sought on the draft chapter from the public and stakeholders. General comments were received as well as users filling out an online survey.
2023-2024	NZTA and KiwiRail	Council officers and technical experts met with transport infrastructure operators NZTA and KiwiRail over reverse sensitivity provisions.

(60) Main themes of this feedback were:

- The importance of noise as an issue
- The positive values of some specific noise-generating activities (e.g. construction, the rail network, emergency services)
- Concerns over the costs of mitigating noise at source for infrastructure operators
- Management of the noise and vibration caused by quarrying (both from the operator and neighbours)
- Management of the noise caused by industrial activities from neighbours of proposed or potential industrial areas
- Noise from the road and rail network
- The appropriate size of reverse sensitivity overlays for roads and rail
- The appropriate standard to be applied for reverse sensitivity management (in particular, a target indoor noise level or a target for the reduction of noise compared to outdoor levels)
- Requests for additional activities to be included as “noise-sensitive activities” (renamed in the proposed plan to “activities sensitive to noise”)
- The details of noise limits levels and particularly the times that different levels apply
- The workability of rules expressed in a qualitative way, particularly the rule for vibration
- Feedback on the online survey on the specific questions asked.
Respondents generally supported moving to a consistent noise limit within each zone, supported requiring noise insulation near highways and railways, and were mixed on raising Sunday noise limits to match

Saturday. It should be noted that these are self-reported responses and this is not a statistically representative survey of the community.

- Whether existing activities or new ones should have greater responsibility for managing noise.
- The complexity of draft rules.

4.3 Summary of resource management issues

- (61) Based on the above sources of information, the key resource management issues are:
- a. Human health can be negatively affected by noise, particularly when people are attempting to sleep.
 - b. The acoustic environment is part of what contributes to amenity values consistent with the intended purpose and characters of zones and precincts. Excessive or annoying noise conflicts with these amenity values.
 - c. There can be substantial compliance costs of ensuring compliance with noise provisions.
 - d. There can be operational constraints on activities where those activities need to control their noise within limits.
 - e. Noise-generating activities can have functional needs to be located near activities sensitive to noise.
 - f. Where there are good reasons to provide for greater noise in commercial areas, industrial areas, quarries, and near highways and railways, this produces a reverse sensitivity effect.
 - g. The cost of mitigating noise at source versus at receiving sites varies. It is generally not practical to mitigate vibration at a receiving site.

5 Scale and significance assessment

(62) In writing this evaluation report we must provide a level of detail that corresponds to the scale and significance of the environmental, economic, social, and cultural effects anticipated from the implementation of the proposal.

(63) In assessing that scale and significance we have had regard to:

Matters of national importance	This topic does not touch on any RMA s6 Matters of National Importance.
Other matters	This topic touches on the s7 matter of amenity values and has a moderate contribution to that matter
Degree of change from the operative plan	This topic has a moderate degree of change from the operative plan, chiefly in terms of the technicalities of rules. There is a lesser change to the policy approach.
Geographic scale of effects	This issue affects the entire district, and effects can be felt hundreds of metres or kilometres away from the source
Number of people affected	Any one source of noise is likely to affect somewhere between a small number of households and a neighbourhood or suburb
Duration of effects	The effects of noise have little or no impact except while the noise is occurring. They do not typically affect future generations.

Economic impacts	Moderate impacts, e.g. the cost of noise insulation, costs from limiting construction hours
Social and cultural impacts	Moderate impacts from stress and annoyance
Environmental impacts	Low
Health and safety impacts	Moderate during the night, low during the day
Degree of interest from mana whenua	Low. Mana Whenua have not expressed a particular interest in this topic.
Degree of interest from the public	Moderate, based on the level of response during community engagement. However, concerns about noise are generally not about the contents of the noise chapter but noise as a flow-on effect from the classification of sites into zones.
Degree of risk or uncertainty	This field is well-understood and predictable, particularly in terms of technical requirements, modelling, and the effects of noise on human health

(64) Accordingly, the overall scale and significance of the effects of noise are **low**.

6 Proposed District Plan objectives and provisions

- (65) The proposed plan approach consists of two objectives, supporting three policies and nine rules, which have various standards and seven appendices covering more elaborate technical details. As required by the national planning standards, NZS 6801:2008, 6802:2008, 6803:1999, and 6807:1994 are incorporated by reference.
- (66) The two objectives cover the two major groups of resource management issues – NOISE-O1 covers the management of emissions of noise, and NOISE-O2 covers controlling activities sensitive to noise. All provisions relate to one and only one of these objectives and so this assessment will consider the two groups separately.
- (67) The first two policies and their associated rules set out the overall approach to managing noise emission – permitting noise emission within a reasonable level based on the source, receiving environment, time of day and week, the nature of the noise, the temporary or permanent nature of the activity, and the type of activity.
- (68) The third policy and its associated rules set out the approach to managing reverse sensitivity, which requires some land uses sensitive to noise to have adequate sounds-proofing where in a zone, or near a piece of infrastructure, where higher noise emissions are anticipated. There is a resource consent pathway for designs that don't fall within the expected performance standard where there are reasons to depart from this.
- (69) The objectives for the chapter, and the other provisions that implement them are set out in the table below:

Objective	Text and associated provisions
NOISE-O1	<p>Adverse effects of noise</p> <p><i>"Adverse effects from noise:</i></p>

	<p>1. Do not compromise people's health, and</p> <p>2. Are compatible with people's wellbeing, and the planned purposes, characters, and amenity values of zones and precincts, except:</p> <p>a. To the degree necessary to provide for short term construction activities or temporary activities, and</p> <p>b. To the degree necessary to provide for an infrequent number of major events in public places in the city where these have traditionally occurred."</p> <p>Implemented through:</p> <ul style="list-style-type: none"> • NOISE-P1 (Appropriate noise generating activities), • NOISE-P2 (Short term noise generating activities), • NOISE-R1 (Emission of noise except where otherwise provided for in this chapter), • NOISE-R2 (Emission of noise from construction activities), • NOISE-R3 and NOISE-R4 (Emission of noise from temporary activities), • NOISE-R5 (Activities that result in vibration), • NOISE-R9 (Noise from aircraft at helicopter landing areas), • Standards NOISE-S1, NOISE-S2, NOISE-S3, and NOISE-S4, and • Appendices NOISE-APP1, NOISE-APP2, NOISE-APP3, and NOISE-APP4.
NOISE-O2	<p>Reverse sensitivity</p> <p><i>"Existing noise generating activities, and future noise generating activities in locations anticipated for such</i></p>

	<p><i>activities, are not unreasonably constrained in their operations by reverse sensitivity from inappropriately located or designed activities sensitive to noise.”</i></p> <p>Implemented through:</p> <ul style="list-style-type: none">• NOISE-P3 (Reverse sensitivity),• NOISE-R6, NOISE-R7, NOISE-R8 (Construction, addition, and alterations in the highway and railway noise overlay and in certain zones),• Standards NOISE-S5, NOISE-S6, NOISE-S7, and NOISE-S8, and• Appendices NOISE-APP5, NOISE-APP6, and NOISE-APP7.
--	---

7 Evaluation of objectives

- (70) This section is the evaluation of objectives, as required through s32(1)(a) of the RMA.
- (71) An objective is a statement of what is to be achieved through the resolution of a particular resource management issue. A district plan objective should set out a desired end state to be achieved through the implementation of policies and rules.
- (72) Under s75(1)(a) of the Resource Management Act, a district plan must state the objectives for the district.
- (73) Under s32(1)(a) of the Resource Management Act, an evaluation report required under the Act must examine the extent to which the objectives of the proposal being evaluated are the most appropriate way to achieve the purpose of the RMA. The purpose of the RMA, as stated in s5(1) of the Act, is to promote the sustainable management of natural and physical resources.
- (74) For the Noise chapter, this evaluation is split into two groups for both the objectives and other provisions – objective O1 relating to adverse effects of emissions of noise, and objective O2 relating to reverse sensitivity.

7.1 Evaluation of NOISE-O1 (adverse effects of noise)

NOISE-O1 – Adverse effects of noise

Adverse effects from noise:

1. *Do not compromise people's health, and*
2. *Are compatible with people's wellbeing, and the planned purposes, characters, and amenity values of zones and precincts, except:*
 - a. *To the degree necessary to provide for short term construction activities or temporary activities, and*

b. To the degree necessary to provide for an infrequent number of major events in public places in the city where these have traditionally occurred.

Relevance

- Relates to the identified resource management issues (see issues a, b, d, and e in paragraph (61)).
- Relates to issues that can be managed under the powers available to Council.

Usefulness

- The objective is presented as a factual test for decision-makers, in providing an outcome that can be assessed when monitoring or evaluated in a consent application.
- The objective sets out relevant effects on the environment.
- The objective supports the Council function of controlling the actual and potential effects of noise.

Reasonableness

- Sets human health (an RMA s5 matter) as an overriding goal.
- Sets amenity values as an outcomes to be weighed against the benefits of activities producing noise.
- Some noise-generating activities have intrinsic societal and economic benefits, and it is reasonable that these are recognised and provided for.
- These outcomes are consistent with outcomes sought in the operative District Plan, other district plans in the Wellington region, and higher order policy direction.

Achievability

- Can be achieved through industry-standard methods without imposing a significant regulatory burden on people producing noise (although the policies and rules that implement the objective would have a greater influence on this).

Alternatives

• **No specific objective for construction activities or temporary activities**

This would omit the word “except” and everything following in clause 2, thus not providing different treatment for the impact on amenity values of temporary activities including major events, and construction activity.

Council considers that construction activity and temporary activities are vital and have significant benefits, respectively. They are also transient in nature. Providing a greater degree of leeway to allow for their functional needs is appropriate if only amenity and not health is compromised.

• **Additional tests for other activities**

Council considered providing similar exemptions for other activities in the same fashion as construction activities and temporary activities, and the site-by-site noise limits in

the operative plan. However, Council did not consider there to be a compelling reason for this to be handled at the level of an objective.

7.2 Evaluation of NOISE-O2 (reverse sensitivity)

NOISE-O2 – Reverse sensitivity

Existing noise generating activities, and future noise generating activities in locations anticipated for such activities, are not unreasonably constrained in their operations by reverse sensitivity from inappropriately located or designed activities sensitive to noise.

Relevance

- Relates to the identified resource management issues (see issues a, c, d, f, and g in paragraph (61)).
- Relates to issues that can be managed under the powers available to Council.
- Relevant to regional policy direction under RPS Objective 10.

Usefulness

- The objective is presented as a factual test for decision-makers, in providing an outcome that can be assessed when monitoring or evaluated in a consent application.
- The objective sets out relevant effects on the environment.
- The objective supports the Council function of controlling the actual and potential effects of noise.

Reasonableness

- It is reasonable to protect the ability of infrastructure and commercial areas to operate by ensuring potentially incompatible activities are managed to reduce that incompatibility.
- This outcome is reasonable for those undertaking development to meet, through the test that only applies to inappropriately designed or located activities.
- This outcome is consistent with outcomes sought in the operative District Plan, other district plans in the Wellington region, and higher order policy direction.

Achievability

- Can be achieved without imposing a significant regulatory burden on applicants under the District Plan (although the policies and rules that implement the objective would have a greater influence on this).

Alternatives

- **Do not include objective**

The Council considered whether neighbours of infrastructure and commercial areas should be protected solely through noise requirements controlling the source of noise. However, on the basis of the technical evidence, Council considered that there was no practical way to achieve this.

- **Rely on objectives in zone chapters and Transport chapter (status quo)**

This option was rejected as adding unnecessary complexity for plan users.

FINAL DRAFT

8 Evaluation of Policies and Rules/Methods

8.1 Background

- (75) Policies and rules implement, or give effect to, the objectives of a plan.
- (76) Policies of a district plan are the course of action to achieve or implement the plan's objective (i.e. the path to be followed to achieve a certain, specified, environmental outcome). Rules of a district plan implement the plan's policies, and have the force and effect of a regulation.
- (77) Under s32(1)(b) of the Resource Management Act, an evaluation report required under the Act must examine whether the provisions in the proposal are the most appropriate way to achieve the objectives by—
- (i) *identifying other reasonably practicable options for achieving the objectives; and*
 - (ii) *assessing the efficiency and effectiveness of the provisions in achieving the objectives; and*
 - (iii) *summarising the reasons for deciding on the provisions.*
- (78) Under s32(2) of the Resource Management Act, the assessment of the efficiency and effectiveness of the provisions must:
- (a) *identify and assess the benefits and costs of the environmental, economic, social, and cultural effects that are anticipated from the implementation of the provisions, including the opportunities for—*
 - (i) *economic growth that are anticipated to be provided or reduced; and*
 - (ii) *employment that are anticipated to be provided or reduced; and*

- (b) *if practicable, quantify the benefits and costs referred to in paragraph (a); and*
- (c) *assess the risk of acting or not acting if there is uncertain or insufficient information about the subject matter of the provisions.*

8.2 Notes

(79) Specific quantification of the benefits and costs associated with NOISE-O1 is not considered practical, given the relatively low scale and significance of the issue, and the characteristics of noise as a resource management issue that:

- The cost of enforcement naturally scales in response to public interest in the issue, as enforcement is primarily driven through complaints,
- The opportunity cost/foregone benefits of compliance are typically low as most excessive noise is emitted unnecessarily and without using the best practicable option, and
- Costs and benefits are often going to be situation-specific, and weighting them is more effectively done at the resource consent stage – this test is built into policies and matters of discretion.

(80) Some quantification of the costs and benefits of NOISE-O2 (noise insulation requirements) is done in the Hunt report (see attachment 1).

(81) The evidence base which has informed the preparation of the proposed Noise chapter is identified in section 4.2 of this report. With consideration to this evidence base, the issues concerning noise are generally well understood at a national and international scale and are very unlikely to be substantially different in the context of Lower Hutt. As such, there is sufficient information on which to base these provisions. However, there is some uncertainty about the future noise environment and Council has had to make assumptions about future trends. For more information, see the Hunt report (attachment 1).

(82) In addition, Council has made assumptions around the future noise levels likely to be produced by the state highway network and railway network

based on the Regional Land Transport Plan, Regional Public Transport Plan, and National Adaptation Plan. Council's view is thus that:

- Traffic is unlikely to grow significantly on the SH2 corridor as there are no capacity increases planned for, and the RLTP aims for a significant mode shift to public transport,
- Passenger rail traffic is likely to grow on the metro rail network, which is and will remain fully electrified,
- Passenger rail traffic is likely to grow on the regional rail network, but this will be fully electrified (within Lower Hutt) in the medium-term future, with new multi-mode rolling stock, and
- Freight rail traffic on the Wairarapa Line is likely to remain constant or decline, or in the event of significant growth, KiwiRail will need to procure new rolling stock which should not be assumed to be diesel-powered.

(83) Council has also used noise modelling from NZTA. The assumptions behind this modelling differ significantly from those made by Council (see attachment 3). NZTA's modelling assumes significant future traffic growth, and that existing buildings will all be retained (and thus continue to provide screening). However, in the absence of alternative modelling Council has used this as the best available information.

8.3 Evaluation of provisions

(84) The proposed provisions are three policies and nine rules. The rules have several associated standards, including incorporation by reference of parts of the NZS 6800-series of noise standards set out by the National Planning Standards. The policies, rules, and standards fall into two distinct groups, relating to either objective NOISE-O1 (adverse effects of noise) or NOISE-O2 (reverse sensitivity) – the grouping can be seen in the table in paragraph (69).

8.3.1 Provisions that implement NOISE-O1

(85) NOISE-O1 is implemented by policies NOISE-P1 and NOISE-P2. These provide for activities that generate noise but subject to limits on that noise to protect health and wellbeing. Temporary activities and construction

activity are subject to limits on noise to protect health and subject to using the best practicable option to avoid unreasonable impacts on wellbeing.

- (86) The rules and standards set permitted activity limits for noise emissions based on day, time, and zone, and a restricted discretionary resource consent pathway when this is exceeded. In general, these standards follow the NZS 6800-series of standards, which are incorporated by reference, and follow the specific technical recommendations of the Hunt report (attachment 1).
- (87) The rules also provide for some activities to be exempt from the general numeric standards for noise and rely only on the RMA's general provisions around excessive noise. This is where those activities are difficult to monitor or enforce in a quantitative way (such as residential noise), have obvious functional requirements (such as emergency sirens), or fall outside Council's RMA jurisdiction and are covered by other legislation (such as aircraft in flight).

NOISE-P1 Appropriate noise generating activities

NOISE-P2 Short term noise generating activities

NOISE-R1 Emission of noise except where otherwise provided for in this chapter

NOISE-R2 Emission of noise for construction activities

NOISE-R3 Emission of noise from temporary activities, other than major events within the Major Events Overlay

NOISE-R4 Emission of noise from major events within the Major Events Overlay

NOISE-R5 Activities that result in vibration

NOISE-R9 Noise from aircraft at helicopter landing areas

Why these provisions are included in the proposed District Plan

These provisions implement objective NOISE-O1.

The policy outlines the purpose of the rules and standards, and provides guidance for matters to consider when assessing applications under rules NOISE-R1 to NOISE-R5 and NOISE-R9. The policies are not referred to in the assessment matters for controlled and restricted discretionary activities but should be considered in any application.

NOISE-R1 manages noise emissions by providing for permitted activity standards, methods for demonstrating conformance, and thresholds for a resource consent assessment. Matters of discretion are contained in the rule and standards and identify the particular effects to be considered that are relevant to breached standards.

Efficiency and effectiveness

Benefits

- Maximum levels of noise protect people from sleep disturbance and annoyance, protecting human health and amenity values.
- Definite numeric limits provide certainty for operators of activities that generate noise.
- Exceptions for temporary and construction activities (which apply during the day) accepts that the benefits of these will generally outweigh short-term effects on amenity values.

Costs

- Through providing for noise emissions, some adverse effects will not be able to be avoided.
- Adverse effects will occur through violations of the plan that are not practical to monitor and enforce.
- Larger scale events with a risk of exceeding limits will face compliance costs, particularly if a detailed management plan or modelling from an acoustic engineer is required.
- The chapter is quite technical and, while non-experts will be able to figure out what is required this will require more effort than a simpler chapter structure.

Overall assessment

The provisions are effective in implementing the outcomes expressed in the objectives. Providing for the benefits of activities that emit noise as a side effect and managing effects on the environment may in some circumstances lead to conflicting outcomes. The provisions provide guidance as to how resource consent applications may resolve tension between these outcomes.

However, in the vast majority of cases activities will have a best practicable option that does not unnecessarily constrain the activity while avoiding significant environmental effects. The major costs are in assessing compliance and enforcement, rather than the management of the activity itself. The nature of enforcement allows monitoring of this cost over time and adjusting in response.

There may be significant costs from activities that cannot find a practicable option. However, the resource consent allows a tailored comparison of these benefits to the costs of the adverse effects that the noise emission would produce.

Reasonably practicable alternatives

- **Same rule framework with different numeric limits, or different pattern of limits depending on time and zone**

Council considered alternatives for the specific decibel limits proposed. Those chosen are based on the NZS 6802:2008, NZS 6803:1999, and WHO guidelines, with the principle of:

- Choosing the most conservative (lowest) reasonable limit for residential areas at night, to provide the greatest protection for human health risks from sleep disturbance, and
- Choosing the most liberal (highest) limit consistent with the guidelines during the day and in non-residential areas, to not unreasonably constrain activities.

- **No exceptions for residential or rural activities**

Council considered whether to include residential and rural activities within the framework, instead of relying on the general noise provisions of the RMA. Council discounted this as not fitting with the general nature of residential noise complaints as being transient and not well suited to the sort of long-term monitoring needed to establish a break of numeric limits.

- **Numeric vibration standard**

Council considered whether to adopt a numeric rather than qualitative standard for vibration, but dismissed this option as being impractical for council to monitor and ensure compliance with. Further discussion of this is in the Hunt report.

- **No numeric limits and reliance on general RMA provisions**

Council considered whether to omit specific decibel limits based on zone, time, and day. This option was not pursued as it does not provide sufficient certainty over the acceptable level of noise.

- **Lower noise limits on Sundays**

Council considered whether to provide for lower noise limits on Sundays, similar to the approach in the operative plan. Although not included in the draft district plan itself, this option was consulted on in the survey created for the draft district plan. Council rejected this option as there was insufficient information to be sure the community still held strong views on the separate treatment of Sundays and Saturdays.

8.3.2 Provisions that implement NOISE-O2

- (88) NOISE-O2 is implemented by policy NOISE-P3. This provides for activities that are sensitive to noise and likely to be subject to noise from commercial centres, main highways, and the railway network on condition that adequate noise insulation is provided in their construction to avoid health impacts and major wellbeing impacts on recipients, which Council might then be obliged to otherwise manage through limits on those commercial areas, highways, or the railway network. This has a dual benefit in avoiding reverse sensitivity effects on commercial areas,

highways, and railways, and also ensuring buildings remain useful for noise-sensitive activities.

- (89) The rules and standards set out two main permitted pathways to show that adequate noise insulation is required, by meeting a construction schedule or meeting a performance standard. For details on the selection of the standards, see the Hunt report (attachment 1).

<p>NOISE-P3 Reverse sensitivity</p> <p>NOISE-R6 New buildings, or alteration and additions to existing buildings, to be used by an activity sensitive to noise within the Highway and Railway High Noise Overlay</p> <p>NOISE-R7 New buildings, or alterations and additions to existing buildings, to be used by an activity sensitive to noise, within the Highway and Railway Moderate Noise Overlay</p> <p>NOISE-R8 New buildings, or alterations and additions to existing buildings, to be used by an activity sensitive to noise</p>
<p>Why these provisions are included in the proposed District Plan</p>
<p>These provisions implement objective NOISE-O2.</p> <p>The policy outlines the purpose of the rules and standards, and provides guidance for matters to consider when assessing applications under rules NOISE-R6 to NOISE-R8. The policy is not referred to in the assessment matters for restricted discretionary activities but should be considered in any application. These rules provide for noise-sensitive activities on condition that they are adequately insulated against excessive noise. The level of insulation required to be a permitted activity varies based on which commercial zone (for commercial areas) or proximity to the relevant highway or railway, as indicated on the plan maps, for the transport network. A resource consent pathway provides for exceptions or situations where compliance cannot be demonstrated through normal means.</p>
<p>Efficiency and effectiveness</p>
<p>Benefits</p> <ul style="list-style-type: none"> • Protects commercial activities from reverse sensitivity impacts, including regionally significant commercial centres • Protects regionally significant infrastructure in the form of railway operations and highway use from reverse sensitivity impacts • Protects health and wellbeing of residents and other noise-sensitive occupants within buildings, allowing more flexible long-term use of new buildings • Sets clear, unchanging performance targets with relatively low compliance costs • Tailored standards for different areas and situations provide greater protection where needed without requiring assessment where not needed.

- Provides objective standards that, for most small scale residential developments, can be implemented without needing detailed modelling or expert assessment, and can be enforced using resources routinely available to council.
- Resource consent process limited to relevant effects.
- Commonality across the district plan and with other district plans will reduce compliance costs and aid public familiarity with the provisions.

Costs

- As the resource consent pathway and associated expert assessment is a barrier, developers may provide excessive insulation, costing money and using scarce resources, rather than make the case for lesser insulation. This is mitigated by the fact that the excess will at least be spent on insulation, which will have at least some benefits, rather than assessment, which in itself does not provide benefits.
- Adds costs to users who may be willing to put up with the noise
- Adds costs in situations where reverse sensitivity would not, in the counterfactual, have impacted the commercial area or transport network
- Adverse effects will occur through violations of the plan that are not practical to monitor and enforce, or occur through forms of re-use not covered by the rules.
- More complex developments may have higher costs for enforcement and compliance, particularly if a detailed acoustic design from an engineer is required.
- The chapter is quite technical and, while non-experts will be able to figure out what is required this will require more effort than a simpler chapter structure.

Overall assessment

The provisions are effective in implementing the outcomes expressed in the objectives. The reasonably inflexible requirements may require too much insulation in some circumstances, but this is likely outweighed by the cost involved in assessment. A resource consent pathway allows consideration of these issues in individual cases. The provisions provide guidance as to how resource consent applications may resolve tension between these outcomes.

Reasonably practicable alternatives

- **No noise insulation rule**
Council considered a voluntary approach for noise insulation and solely providing information about expected noise levels. This is the approach used in the proposed Wellington City District Plan for noise from helicopter activity at Wellington Regional Hospital. Council rejected this option as insufficient to achieve objective NOISE-O2.
- **Single noise control overlay**
Council considered whether to use a single overlay rather than separate Moderate and High noise overlays, as proposed in the 2023 draft District Plan. Council rejected this option as, while simpler, would require excessive and costly insulation in lower noise areas or under-protect in higher noise areas.
- **Target internal noise level**

Council considered whether to set the standards NOISE-S5 through NOISE-S8 on the basis of a target internal noise level, rather than the proposed approach of a target for $D_{tr,2m,nTw}$, that is, a performance of the insulation. The internal noise level approach was requested by NZTA and KiwiRail. Council rejected this as not providing enough certainty for developers and having excessive compliance costs. For more information, see the Hunt report (attachment 1).

- **Activities sensitive to noise as non-complying or prohibited activity within overlay**

Council considered whether noise-sensitive activities should be avoided entirely rather than relying on noise insulation but discounted this as being more restrictive than necessary to meet objective NOISE-O2.

- **Noise insulation requirement to apply to rail and highways only, not commercial zones**

Council considered this option but discounted it as it would limit the flexibility of commercial areas to be used for activities with significant benefits that might nonetheless be incompatible with uninsulated sensitive activities, such as live music venues.

- **Noise overlay to be standard distance for highways**

Council considered applying the High and Moderate Highway Noise Overlay as a consistent distance (e.g. 40 metres and 100 metres respectively) from the highway corridor rather than using the modelling provided by NZTA. Council rejected this information as based on the information provided by NZTA it was thought likely that this would apply the noise insulation requirement in situations where it was likely to be unnecessary.

- **Noise overlay to be modelled based on predicted noise levels across both rail and highways**

Council considered whether to apply the pattern of High and Moderate noise overlays using computerised modelling of predicted noise levels based on Council's (rather than NZTA or KiwiRail's) assumptions about future traffic levels. Council opted not to do this modelling as it considered the costs of conducting the modelling would exceed the likely benefits.

- **Noise overlay to also require protection for vibration**

Council considered whether to also apply requirements to protect noise-sensitive activities from vibration. This was discarded as it would have significantly greater compliance costs and may in many cases not be possible, and considers it will almost always be more practical to manage vibration at source.

9 Summary

(90) This report, including the evaluation, has been prepared to set the context for the Noise chapter of the proposed District Plan. The evaluation has been undertaken in accordance with section 32 of the RMA in order to identify the need, benefits and costs and the appropriateness of the proposed chapter, having regard to its effectiveness and efficiency relative to other means in achieving the purpose of the RMA. The evaluation demonstrates that this proposal is the most appropriate option as it:

- Recognises and provides for the benefits of activities that generate noise as a side effect,
- Controls the effects of that noise to protect human health and wellbeing,
- Controls activities that may have unreasonable reverse sensitivity impacts,
- Sets objectives that are relevant, useful, reasonable and achievable,
- Manages the adverse effects of noise on the environment, in a way that recognises the different characteristics of different receiving environments, particularly urban, suburban, rural, and natural areas,
- Minimises compliance and enforcement costs,
- Makes conservative decisions where information is limited,
- Aids public understanding of the system through regional and national consistency and the use of the relevant New Zealand standard,
- Provides adequate direction for resource consent applications,
- Is consistent with higher order documents, particularly the Regional Policy Statement for the Wellington region, and
- Is consistent with the requirements of the National Planning Standards.

10 Attachments

(91) The following documents are attached to this report:

- Attachment 1: Noise and Vibration Review – Malcolm Hunt Associates.
- Attachment 2: Recommended State Highway & Wairarapa Rail Line Noise Overlays for Reverse Sensitivity Noise Protection Measures – Hutt City Proposed District Plan – Malcolm Hunt Associates.
- Attachment 3: State Highway Noise Control Boundary Overlay – Chiles Ltd.

(92) While not attached, the following standards are incorporated by reference in the proposed plan and can be viewed at the Council's main office at 30 Laings Road, Lower Hutt:

- New Zealand Standard 6801:2008 Acoustics – Measurement of environmental sound
- New Zealand Standard 6802:2008 Acoustics – Environmental noise
- New Zealand Standard 6803:1999 Acoustics – Construction noise
- New Zealand Standard 6807:1994 – Noise Management and Land Use Planning for Helicopter Landing Areas

10.1 Attachment 1: Noise and Vibration Review – Malcolm Hunt Associates.

FINAL DRAFT

Hutt City Council - Proposed District Plan

Noise and Vibration Review

Prepared For:



District Plan Policy Team
Hutt City Council

By:

Malcolm Hunt Associates

noise and environmental consultants

Telephone 04 472 5689 Fax 04 473 0456
mha@noise.co.nz www.noise.co.nz

Report Number 23-088-04
November 2021

Proposed District Plan

Noise and Vibration Review

Malcolm Hunt Associates



Quality Control Statement

Date of Issue:	21 November 2021
Client Contact:	Stephen Davis Intermediate Policy Planner Hutt City Council 30 Laings Road, Lower Hutt 5040 www.huttcity.govt.nz
Project Reference:	23-088
Document version:	Rev 04
Document Status	Amended Final
Document Prepared By:	Malcolm Hunt - Acoustic Consultant Bachelor of Science [B.Sc.] Master of Engineering[mechanical] Diploma in Public Health RSH Diploma Noise Control.

Report Distribution

Name	Title/Company	Date of Issue	Report Status/Reference
S. Davis	Policy Planner	16 July 2021	Rev 3 Draft For Comment
S. Davis	Policy Planner	29 October 2021	Final
S. Davis	Policy Planner	21 November 2021	Amended Final

Hutt City Council
Proposed District Plan

Noise and Vibration Review

Table of Contents

1	INTRODUCTION.....	5
2	DISTRICT PLAN REVIEW.....	5
3	SUPPORTING DOCUMENTS.....	6
4	LIMITATIONS.....	7
5	THE OPERATIVE DISTRICT PLAN	7
6	EFFECTS OF NOISE.....	9
6.1	EFFECTS SUMMARY.....	9
6.2	HEALTH EFFECTS	9
6.3	SLEEP EFFECTS.....	10
7	NEW ZEALAND STANDARDS.....	10
7.1	CURRENT NEW ZEALAND ACOUSTIC STANDARDS	11
7.2	INTERNATIONAL STANDARDS.....	11
7.3	NATIONAL ENVIRONMENTAL STANDARDS.....	11
7.4	NATIONAL PLANNING STANDARDS.....	11
8	2021 DISTRICT WIDE NOISE SURVEY	12
8.1	SURVEY METHOD & EQUIPMENT	12
8.2	SUMMARY RESULTS	14
8.2.1	Day/Evening/Night Time LAeq(15 min) Results.....	14
8.2.2	Results By Land Use Category.....	16
8.2.3	Results By Time Of Day.....	17
9	NOISE COMPLAINTS.....	19
9.1	EXCESSIVE NOISE.....	20
9.2	INVESTIGATIONS OF ‘UNREASONABLE’ NOISE	20
10	REVIEW OF OPERATIVE PLAN NOISE PROVISIONS	21
10.1	CHAPTER 14C	21
10.2	NOISE CHAPTER STRUCTURE	22
10.3	NOISE MAPS.....	23
10.4	NZ STANDARDS	23
10.5	SOUND LEVEL DESCRIPTORS LAEQ AND LAFMAX.....	23
10.6	TIME OF DAY	24
10.7	DAY OF WEEK.....	24
10.8	NOISE ASSESSMENT LOCATION.....	25
10.9	NOISE CHARACTER	26
10.10	NOISE FROM COASTAL ACTIVITIES.....	27
10.10.1	Coastal Areas.....	27
10.10.2	Point Howard Business Activity Area.....	28
10.11	MANAGING REVERSE SENSITIVITY EFFECTS.....	29
10.11.1	Noise Sensitive Activities.....	29
10.11.2	Managing Effects on Noise Sensitive Activities.....	30
10.11.3	Managing Effects on Sensitive Activities Along Transport Noise Corridors.....	32

11	RECOMMENDATIONS	33
11.1	NEW ZEALAND STANDARDS AND RELATED NOISE METRICS	33
11.2	RECOMMENDATIONS FOR ACTIVITY ZONES	34
11.3	TWO TEIR NIGHT TIME LAEQ(15 MIN) LIMITS FOR RESIDENTIAL SITES	36
11.4	NOISE FROM FIXED PLANT	36
11.5	ACOUSTIC INSULATION OF HABITABLE SPACES	37
11.6	CONSTRUCTION NOISE	38
11.7	VIBRATION	38
11.8	NOISE FROM TEMPORARY MILITARY TRAINING	39
11.9	TRAFFIC NOISE	40
11.9.1	Noise From Existing roads	40
11.9.2	Noise From New & Altered Roads	42
11.10	NOISE FROM RAIL CORRIDOR.....	43
11.11	HELICOPTER LANDING AREAS	43
11.12	WIND FARM NOISE	44
11.13	TEMPORARY EVENTS NOISE	44
11.14	TELECOMMUNICATIONS EQUIPMENT	45
12	SUMMARY	45
	APPENDIX A - 2021 Ambient Noise Survey Results.....	47
	APPENDIX B - List of Council Investigations Into ‘Unreasonable’ Noise 2010 to 2021.....	73
	APPENDIX C - 2020 Traffic Noise Measurements At Four sites In Lower Hutt.....	75

Hutt City Council

Proposed District Plan

Noise and Vibration Review

Malcolm Hunt Associates

noise and environmental consultants

1 Introduction

Hutt City Council [‘Council’] is conducting a review of its current (operative) District Plan, including the noise and vibration provisions contained therein with a view to developing a new Proposed District Plan, in accordance with the relevant statutory requirements and processes.

Under the Resource Management Act 1991 (RMA) Council has an obligation (Section 31(1)(d)) to “*control the emission of noise and the mitigation of the effects of noise*” within its territory. In planning terms, the District is the key instrument Council uses to manage the effects of noise. Whilst the RMA defines “noise” as unwanted sound, this broad definition does not mean all sound can or should be controlled under RMA procedures. Some sound is acceptable and indeed, necessary, for communication purposes. Thresholds for “adverse effects” are usually set well above levels at which sound may be detected. Thus, the RMA does not provide support for regulating low levels of sound in the environment, sounds we may consider a normal part of our environment - unless it can be shown via assessment in accordance with relevant guidelines and Standards that received sound levels exceed a threshold where mitigation should be applied.

As described below, the operative Hutt City district plan sets out a reasonable approach to land use planning measures to deal with the potential adverse effects of environmental noise in the district, Council’s review provides an opportunity to check and revise current District Plan approaches particularly with respect to their effectiveness and efficiency.

2 District Plan Review

Section 79(1)(c) of the RMA requires local authorities to commence a review of a provision of a district plan if the provision has not been a subject of a review or change in the previous 10 years. Section 79(4) provides scope for local authorities to commence a full review of a district plan. All sections and changes must be reviewed and then the plan be publicly notified (79(6)&(7)).

The review of district plan noise and vibration controls allows for adopting more up to date versions of the relevant New Zealand Standards. The review also provides an opportunity to include emerging issues not foreseen within the operative District Plan. As below, noise-related requirements of various statutes including a relevant National Environment Standard and National Planning Standards which need to be incorporated into the proposed plan.

An important development since the operative plan was developed is the National Planning Standards (NPS) which set out standards with which every district plan must comply. Chapter 7 of the NPS requires Local Authorities to either amend their plan or notify a proposed plan within 5 years of the planning standards coming into effect (April 2024). NPS implications for this review are further discussed in Section 7.4 below.

As a tier one territorial authority, Hutt City Council is required to give effect to the intensification provisions of the National Policy Statement on Urban Development (NPSUD) by notifying a proposed plan change no later than August 2022

This review of District Plan noise and vibration provisions is intended to form and, in part, a section 32-type evaluation which is a process for evaluating alternatives, benefits and costs of any proposed district plan as specified by section 32 of the RMA. Undertaking a section 32 evaluation helps to determine why changes to existing Plan provisions may be needed and formalises a process for working out how best to deal with resource management issues.

This review of the noise provisions and recommendations for the development of the operative District Plan in to a Proposed District Plan aims to:

- Strengthen strategic noise policies.
- Reduce the need for 'unnecessary' resource consents.
- Improve the effectiveness of standards at achieving the outcome intended.
- Introduce some new standards to resolve issues that are new or have become more serious since the last Plan was developed.
- Improve general Plan usability and clarity, including strengthening policies and Plan provisions to provide clearer guidance on the assessment of resource consent applications and the outcomes intended.

3 Supporting Documents

This acoustic review is not zero-based. The review has considered a number of existing background documents and supporting reviews including but not limited to the following list of background publications;

- Existing Operative Hutt City District Plan including maps;
- *Guidelines for Community Noise* edited by Birgitta Berglund, Thomas Lindvall, Dietrich H Schwela. World Health Organization 1999
- *Environmental noise in Europe — 2020*, European Environment Agency. EEA Report No 22/2019
- *Guidelines for Night Noise Guidelines for Europe [NNGfE]*. World Health Organization Regional Europe Office. World Health Organization Regional Europe Office 2009
- *Annoyance from transportation noise: relationships with exposure metrics DNL and DENL and their confidence intervals*, Miedema, H. M. and Oudshoorn, C. G., 2001. *Environmental Health Perspectives* 109(4), pp. 409-416.
- World Health Organization *Burden Of Disease From Environmental Noise - Quantification Of Healthy Life Years Lost In Europe*. 2011 World Health Organisation.
- *Noise Exposure and Public Health* Willy Passchier-Vermeer and Wim F. Passchier, *Environmental Health Perspectives*, Vol 108, Supplement I, March 2000;
- *Noise Exposure And Public Health* Passchier-Vermeer W, Passchier WF [2000]. *Environ. Health Perspect.* 108 Suppl 1: 123–31;
- *Exposure-response relationships for transportation noise* Miedema HM, Vos H. *J Acoust Soc Am.* 1998 Dec;104[6]:3432–3445;
- *Noise sensitivity as a factor influencing human reaction to noise*. Job RF Soames. *Noise & Health.* 1999;1[3]:57–68;
- Standards New Zealand – Acoustic standards [various, as discussed further below].

Our review has also considered the content of the following relevant documents;

- National Policy Statement on Urban Development (NPS-UD)
- National Policy Statement on Electricity Transmission (NPS-ET)
- National Policy Statement on Renewable Energy Generation (NPS-REG)
- National Environmental Standard on Telecommunication Facilities
- National Environmental Standards on Electricity Transmission Activities
- HCC Officer Report - Urban Form and Development – Intensification Areas. Report to District Plan Review Subcommittee 23 April 2021. File: (21/649) Report no: DPRS2021/2/107.
- HCC Officer Report – Transport – Report to District Plan Review Subcommittee. 27 April 2021. File: (21/50) Report no: DPRS2021/2/111

4 Limitations

This review is based on information set out within related documents, standards and guidelines referred to, and on best practice examples from other Council's, case law and professional experience of Council's officers with the existing District Plan.

This review does not include the results of any specific consultation or communications with any stakeholder party or potential submitter. This review does not intend to replace the input provided by others, including other technical experts within the planning process once the public submission process commences. This review presents recommendations for HCC to consider in terms of concepts and approaches, thus detailed wording of policies or rules is not provided.

This report sets out the results of a review of the existing District Plan noise provisions, specifically assessing whether existing approaches are still valid for supporting the District's social, economic and environmental vision, and to ensure that adverse impacts are avoided, or appropriately mitigated. This includes seeking to minimise impacts on parties potentially affected by noise and those who may be indirectly affected by people's reaction to noise [reverse sensitivity effects].

We understand this noise and vibration review is being undertaken within the context of Council's statutory responsibilities which includes stewardship and protection of the environmental, social, economic and cultural wellbeing of present and future generations within the District, with statutory responsibilities to have regard to the Treaty of Waitangi and effects on tāngata whenua.

Under the RMA Council has the powers to control noise effects through non-district plan methods such methods as;

- Conditions attached to resource consents;
- Enforcement proceedings including: Abatement notices, enforcement orders and; excessive noise direction notices.

5 The Operative District Plan

Chapter 14C of the operative District Plan sets out environmental noise requirements in terms of policies, objectives and rules. The key players in the management of noise under the District are:

- Noise producers;
- Regulatory authorities, in this case Hutt City Council;
- The noise receivers;

All areas of the City are currently zoned. Within each zone, activities are managed on the basis of the effects of those activities. Chapter 14C of the operative district plan sets out limitations noise emissions from permitted land use activities. The focus of the policies and objectives set out in Chapter 14C.1.1 is on maintaining or enhancing

health and amenity values. The Operative Hutt City District provides for zoning of land use activities within 'activity areas' summarised as follows;

Residential Activity Areas

General Residential Activity Area
Medium Density Residential Activity Area
Special Residential Activity Area
Historic Residential Activity Area
Hill Residential Activity Area

Commercial Activity Areas

Central Commercial Activity Area
Petone Commercial Activity Area
Suburban Commercial Activity Area
Special Commercial Activity Area
Suburban Mixed Use Activity Area

Business Activity Areas

General Business Activity Area
Special Business Activity Area
Avalon Business Activity Area
Extraction Activity Area

Recreation Activity Areas

General Recreation Activity Area
Special Recreation Activity Area
River Recreation Activity Area
Passive Recreation Activity Area

Rural Activity Areas

Rural Residential Activity Area
General Rural Activity Area

The results of our review of the noise and vibration provisions of the operative district plan is set out in Section 10 and 11 below. The review covers noise matters set out in Chapter 14C of the plan in addition to reverse sensitivity noise and vibration matters covered within the acoustic insulation requirements of Chapter 5 (5A Central Commercial Activity Area, and 5B Petone Commercial Activity Area) and within Standard 6 (Development within the State Highway and Railway Corridor Buffer Overlays) attached to Chapter 14A Transport.

The review, in summary, recommends;

- Replacing and updating references to relevant NZ Standards.
- Setting out the noise chapter in a more conventional format as per the requirements of the National Planning Standards which entails applying zone noise emission standards in each zone. This would remove any reference to 'Noise Areas' and site-specific noise limits currently referred to in the operative Plan.
- Strengthening reverse sensitivity measures to address noise impacts, including within more densely populated areas near transport corridors and within the city centre.
- Re-assessing whether it is necessary to include specific vibration performance standards in the district plan, as may require expert measurement and assessment, beyond what a Council staff member could be expected to undertake.
- Addressing technical differences in the way the district plan currently specifies acoustic insulation (where this is required in a rule to address reverse sensitivity noise effects). The operative plan refers to two different methods for prescribing acoustic insulation within Chapter 14A and Chapter 5. Recommendations to address this reflect the desire for a common, easily understood and used unified district plan approach to specifying acoustic insulation requirements with a focus on being transparent and user-friendly.

6 Effects of Noise

6.1 Effects Summary

Research into the effects of environmental noise has focused on the annoyance such sound causes to humans, or the extent to which it disturbs various activities undertaken by people. This is because annoyance is the most commonly expressed reaction by those exposed to intrusive sound in the environment.

At a biological level, noise is considered a non-specific stressor that may cause adverse health effects on humans in the long term. Epidemiological studies suggest a higher risk of cardiovascular diseases, including high blood pressure and myocardial infarction [heart attacks], in people chronically exposed to high levels of road or air traffic noise¹. In many cases noise occurring in the environment is simply intrusive, interfering with listening to television or radio or affecting the enjoyment of quiet outdoor areas around in the home or in parks or reserves.

The effects of environmental noise are usually expressed in terms of:

- Annoyance;
- Speech interference - high levels of noise can make normal speech difficult to hear
- Performance - some noises can make concentration difficult and interfere with tasks such as learning, checking fine details [such as any job with a large mathematical component or where the meaning of words is critical] or work where small, precise, movements or intense concentration is required;
- Mental health issues [including noise-induced stress-related effects];
- Sleep disturbance - in addition to fatigue and mental health effects, disrupted sleep patterns can leave people irritable, change their behaviour, and reduce their ability to work or perform tasks.

There is sufficient scientific evidence to reasonably demonstrate the linkage between exposure to environmental noise and hypertension and ischemic heart disease, annoyance, sleep disturbance, and decreased learning performance in the classroom. However for effects such as changes in the immune system and birth defects, the evidence is limited [WHO 1999].

There have been no new findings in respect of the threat that environmental noise poses to human health and welfare since the District Plan was first published. Most public health impacts of environmental noise were identified as far back as the 1960's with research in more recent times concentrating on the elucidation of the mechanisms underlying the known effects, such as noise induced cardiovascular disorders and the relationship of noise with annoyance and non- acoustical factors modifying health outcomes².

The Ministry of Health monitors protection of public health from environmental noise through reporting by *National Environmental Noise Service* [NENS] which it funds. NENS has been closely involved in developing and revising various New Zealand acoustic standards, including NZS 6802, a key Standard guiding on the assessment of noise referred to within the District Plan, and within the discussion below. Thus to reasonably provide for the protection of health and amenity, recommendations for managing environmental noise should adhere to the guidance set out within NZS6802.

6.2 Health Effects

Standards of acceptable levels of environmental noise are essentially derived from observations and studies on the effects of noise on "normal" or "average" populations. The participants of these investigations and studies are usually selected from the general population. Vulnerable groups of people are typically underrepresented in such studies [WHO 1999] including but not limited to;

- People with decreased personal abilities [old, ill, or depressed people];
- People with particular diseases or medical problems;
- People dealing with complex cognitive tasks, such as reading acquisition;

¹ WHO Burden Of Disease From Environmental Noise - Quantification Of Healthy Life Years Lost In Europe. World Health Organisation, Geneva, 2011.

² Noise Exposure and Public Health Willy Passchier-Vermeer and Wim F. Passchier, Environmental Health Perspectives, Vol 108, Supplement I, March 2000.

- Young children.

It is for this reason that noise rules and guidelines designed to protect against the adverse effects of noise on people should cater for both the young and old, as well as typical residences which are traditionally the places where people live, rest and relax. Hospitals, aged-care facilities, pre-schools, schools, universities and polytechs fall within the definition of noise sensitive land uses identified for protection within NZS6802:2008 *Acoustics – Assessment of Environmental Noise*.

6.3 Sleep Effects

The available evidence confirms disturbed sleep is associated with a number of health problems. Noise can disturb sleep by a number of direct and indirect pathways. It has been shown that awakening reactions are relatively rare, occurring at a much higher level than the physiological reactions.

WHO *Night Noise Guidelines For Europe* (2009) and EU Noise Directive (2002/49/EC) recommend L_{night} outside of 40 dB as a night noise guideline to protect the public, including the most vulnerable groups such as children, the chronically ill and the elderly. However, this is an aspirational goal which may or may not be achievable.

The issue of adjusting downwards [lowering] district-wide noise limits in order to cater for vulnerable subgroups in the general population have been investigated. In setting the balance for sustainable management of noise in the environment there is a need to focus on the average response to noise of the average person. To impose a restrictive standard in order that the most vulnerable groups are protected to a high standard will impose costs and restrictions on the community who would otherwise be adequately protected at levels suited to the majority of the population.

Night time noise limits in most New Zealand District Plans are based on the units;

- Energy average sound level - LAeq(15 min) and
- Single event LAFmax

The most common approach is for district plans to limit 15 minute average sound levels to LAeq 40 or 45 dB during night time hours. Setting noise limits at sensitive receiver sites below 40 dB would make compliance difficult to measure except during the quietest night time period. At the other end of the scale, there is insufficient evidence that the adverse effects would be observed during night time where noise from adjacent sites does not exceed 40 dB outside buildings housing noise sensitive activities. See Section 10.7 below regarding the inadvisability of setting of night time noise for daytime periods on Sundays.

7 New Zealand Standards

The current Operative District Plan makes reference to a number of acoustic standards for the assessment and measurement of general environmental noise. Such standards ensure a repeatable and reliable result when assessing compliance, and are key to Council's ability to monitor and enforce noise standards in the District Plan.

The recommendations below refer to adopting the most recent versions of the relevant acoustic Standards reflecting the requirements of Part 3 of the RMA which covers the incorporation of documents "by reference: in District Plans. This ensures all material correctly incorporated by reference into a plan, has legal effect as if it were part of that plan.

As below, the NZ National Planning Standard is that the most recent New Zealand acoustic standards be adopted as the basis of the noise provisions of the Proposed District Plan.

7.1 Current New Zealand Acoustic Standards

The following eight New Zealand standards are considered to be most recent and technically appropriate standards for environmental acoustics in New Zealand:

NZS 6801:2008 Acoustics –Measurement of Environmental Sound
NZS 6802:2008 Acoustics –Environmental Noise
NZS 6803:1999 Acoustics – Construction Noise
NZS 6805:1992 Airport Noise Management and Land Use Planning
NZS 6806:2010 Acoustics – Road Traffic Noise – New and Altered Roads
NZS 6807:1994 Noise Management and Land Use Planning for Helicopter Landing Areas
NZS 6808:2010 Acoustics –Wind Farm Noise
NZS 6809:1999 Acoustics – Port Noise Management and Land Use Planning

7.2 International Standards

Standards New Zealand represents New Zealand as members of the International Organization for Standardisation [ISO] and the International Electro Technical Commission [IEC]. Through New Zealand’s membership of these organisations we are able to share our expertise and knowledge in a number of areas, and ensure that New Zealand interests are considered. Where possible, New Zealand standards are based on international standards. Utilising the current New Zealand acoustic standards for environmental noise takes account of relevant areas of international standards, that is international standards have been researched and where relevant included or referenced within current New Zealand acoustic standards.

7.3 National Environmental Standards

The proposed District Plan must give effect to, and cannot be inconsistent with, the provisions of a ‘National Environmental Standard’ [NES]. NES are specific regulations issued under Sections 43 and 44 of the RMA and apply nationally providing methodologies or requirements on environmental matters, although they may prescribe technical standards where appropriate.

An NES should not be confused with a ‘New Zealand Standard’ although at one level both provide a consistent approach and process throughout New Zealand – the key difference is that NES’s have must be implemented and regional, city or district council must enforce the same standard without variation, whereas New Zealand Standards can be adopted in whole or in part, and can vary between regulators. In planning terms, a New Zealand Standard only has the force of law when it is referred to in a district plan.

At the time of preparation, there is only one NES relating to noise but in the specific context of telecommunications facilities. NZS 6801:2008 and NZS 6802:2008 are both cited in Clause 9[4] of the Resource Management Act [National Environmental Standards for Telecommunication Facilities] Regulations 2008. The Proposed Plan will be required to follow the NES when specifying limits on noise from telecommunication facilities.

7.4 National Planning Standards

The *National Planning Standards*³ which sets out requirements for district plans to adopt standardised noise and vibration metrics. The stated purpose of the NPS is to improve the efficiency and effectiveness of the planning system by providing, among other things, nationally consistent noise and vibration metrics.

NPS Standard 15 states;

1. *Any plan rule to manage noise emissions must be in accordance with the mandatory noise measurement methods and symbols in the applicable New Zealand Standards incorporated by reference into the planning standards and listed below:*

New Zealand Standard 6801:2008 *Acoustics – Measurement of environmental sound*

New Zealand Standard 6802:2008 *Acoustics – Environmental noise*

³ Ministry for the Environment. 2019. *National Planning Standards*. Wellington: Ministry for the Environment.

New Zealand Standard 6803:1999 *Acoustics – Construction noise*
New Zealand Standard 6805:1992 *Airport noise management and land use planning – measurement only.*
New Zealand Standard 6806:2010 *Acoustics – Road-traffic noise – New and altered roads*
New Zealand Standard 6807:1994 – *Noise Management and Land Use Planning for Helicopter Landing Areas- excluding 4.3 Averaging*
New Zealand Standard 6808:2010 *Acoustics – Wind farm noise*
New Zealand Standard 6809:1999 *Acoustics – Port noise management and land use planning*

2. *Any plan rule to manage noise emissions must be consistent with the mandatory assessment methods in section 6 Rating Level and section 7 LAMAX of New Zealand Standard 6802:2008 Acoustics – Environmental Noise (incorporated by reference into the planning standards), provided the type of noise emitted is within the scope of New Zealand Standard 6802:2008.*
3. *Any plan rule to manage damage to structures from construction vibration must be consistent with the metrics for peak particle velocity (ppv) in ISO-4866:2010 – Mechanical vibration and shock, incorporated by reference into the planning standards*

Under the NPS, noise is to be handled as a stand-alone chapter under the heading of ‘District Wide Matters’. The NPS stipulates the following requirements to be followed when deciding how the “noise Chapter” is to be set out and structured;

33. *If provisions for managing noise are addressed, they must be located in the Noise chapter. These provisions may include:*
 - a. *noise provisions (including noise limits) for zones, receiving environments or other spatially defined area*
 - b. *requirements for common significant noise generating activities*
 - c. *sound insulation requirements for sensitive activities and limits to the location of those activities relative to noise generating activities.*
34. *Any noise-related metrics and noise measurement methods must be consistent with the 15. Noise and vibrations metrics Standard.*
35. *The Noise chapter must include cross-references to any relevant noise provisions under the Energy, infrastructure, and transport heading.*
37. *If provisions to manage temporary activities, buildings and events are addressed, they must be located in the Temporary activities chapter.*

NPS Standard 14 sets out the “Definitions” Standards. Local authorities must use the definition as defined in the *Definitions List* in district plans. There is a requirement that, where terms used in district plans are defined in the *Definitions List* of the Standard, that the term is used in the district plan must be in the same context as the definition. Compliance with the NZ National Planning Standard is mandatory – this will require adopting all relevant NZ acoustic standards listed above. This is a core recommendation of the current review and recommendations for the Proposed Plan.

8 2021 District Wide Noise Survey

RMA s35[2] requires the Council to monitor the state of the City’s environment and to monitor the efficiency and effectiveness of policies, rules, or other methods in the District Plan. The monitoring summarised in this report sets out existing ambient noise levels, allowing for observations to be made around effectiveness of existing District Plan noise policies and rules (noting transport noise, being the most predominant noise source found in the district, is not subject to control via the district plan).

8.1 Survey Method & Equipment

The method of investigation has been to measure ambient sound levels at 19 selected sites in the district to gather daytime and night time sound level readings using automated monitoring equipment over at least a 24 hour

periods, with the microphone located outdoors away from any obvious dominant noise source. The sound level meter was set to automatically log LAmax, LA10, LAeq and L95 values every 15 minutes. Data files from the sound level meter were downloaded into spreadsheets. The data for each site includes summary day/evening/night time, levels plus a graph of time-varying sound levels produced using the logged data.

Measurement set up for the two sound level meters were:

- A weighting (dBA), Fast response.
- Measurement periods: 15 minutes
- Measurement Metrics: LA10, LAmax, LAeq, LA90

Sound level monitoring was carried out in accordance with the procedures set down in the New Zealand Standard, NZS6801:2008 *Acoustics - Measurement of Environmental Sound*. This Standard provides guidance on the technical aspects of noise measurement. All measurements were carried out using a Type 1 Sound Level Meter - Acoustic Research Laboratory 'EL316 Environmental Data Logger' Serial No. 16-707-005. Field calibration was checked before and after measurements.

Sites were selected to be representative of the following land use areas;

- Industrial
- Suburban Mixed
- Residential
- Rural
- CBD
- Railway Corridor

Measurements were conducted at the following sites;

Industrial	
1	93 Eastern Hutt Road, Taita
2	14 Marine Parade, Petone
3	17 Wareham Place, Seaview (Treatment Plant)
Suburban Mixed	
4	794 High Street Boulcott (Brewery)
5	21 Rimu Street Eastbourne
6	362-364 Jackson Street, Petone (1st floor balcony)
6A	Level 1, 1 Jackson Street Petone (1st floor deck)
Residential	
7	4-6 Heretaunga Street, Petone
8	63 Hay Street Naenae
9	57 Queens Grove, CBD
10	57A Cypress Drive Maungaraki
11	2/25B Norfolk Street Belmont
12	26A Kotari Road Days Bay
13	27 Bull Avenue, Wainuomata
14	177A Stokes Valley Road, Stokes Valley
14A	22 Harrison Grove, Avalon
Rural	
15	1090 Coast Road Wainuomata
16	Upper Moores Valley Road
CBD	
17	Level 1, 21-23 Andrews Avenue, Central Hutt
Railway Corridor	
18	Ava Park, Adj. Water Treatment Plant
19	3/86 North Street, Ava, Petone
14B	86 Cambridge Terrace, Waterloo

The measurement locations were generally away from any specific noise source, such as heat pumps. The selection of sites aimed to quantify typically expected ambient sound levels expected for that land use category. The exception is transportation noise. Three survey sites were selected to purposefully quantify rail transportation noise at residential sites adjacent to the Railway corridor.

In addition, results of measurements of 24 hour traffic noise at four selected sites carried out in 2020 in Lower Hutt (undertaken as part of the *RiverLink Project*⁴) have been included in the evaluation of the reverse sensitivity noise mitigation associated with the operative district plan's "*State Highway & Rail Corridor Buffer Overlay*" implemented via District Plan Transportation Standard 6 to Chapter 14A *Transportation*. Discussions and recommendation for transport noise overlays are discussed in Sections 10.11.3 and 11.5 below.

8.2 Summary Results

The focus has been on reporting measured average, minimum and maximum levels of outdoor sound quantified in a consistent manner for each site in units L_{A10} , L_{Amax} , L_{Aeq} , L_{A90} . In addition, an overall summary 24 hour overall average sound level is provided for each site and average per land use category.

The existing noise environment is described in detail within the reported statistics for L_{A10} , L_{Amax} , L_{Aeq} , L_{A90} . Averages referred to generally are arithmetic averages, this is apart from logarithmic averaging required for (1) calculating the overall L_{Aeq} (24 hour) value for each site, and (2) the averaging within each 15 minute period inherent within the calculation of L_{Aeq} (15 min).

Data collected during periods of elevated winds or times of high rainfall have been excluded from the summary statistics reported below.

8.2.1 Day/Evening/Night Time L_{Aeq} (15 min) Results

The following table and graphs provide summary statistics on daytime/evening/night time average L_{Aeq} (15min) levels, as well as overall L_{Aeq} (24 hour) average sound levels.

		L_{Aeq} Av. Day	L_{Aeq} Av. Evening	L_{Aeq} Av.Night
Industrial				
1	93 Eastern Hutt Road, Taita	58.9	52.1	54.1
2	14 Marine Parade, Petone	60.2	56.9	56.2
3	17 Wareham Place, Seaview (Treatment Plant)	60.3	60.1	56.1
	Average	59.8	56.3	55.5
Suburban Centres				
4	794 High Street Boulcott (Brewery)	50.8	46.8	42.0
5	21 Rimu Street Eastbourne	55.8	51.1	48.7
6	362-364 Jackson Street, Petone (1st floor balcony)	62.1	59.3	52.7
6A	Level 1, 1 Jackson Street Petone (1st floor deck)	65.9	60.6	56.7
	Average	58.6	54.5	50.0
Residential				
7	4-6 Heretaunga Street, Petone	46.6	44.0	39.5
8	63 Hay Street Naenae	55.0	49.4	42.3
9	57 Queens Grove, CBD	48.3	44.4	40.2

⁴ *RiverLink* is a partnership between Hutt City Council, Greater Wellington Regional Council (Greater Wellington) and Waka Kotahi NZ Transport Agency (Waka Kotahi) with Mana Whenua to deliver three separate but interdependent projects: Flood protection, the Making Places Urban Development Plan, and Melling transport improvements.

10	57A Cypress Drive Maungaraki	45.4	43.0	34.0
11	2/25B Norfolk Street Belmont	55.0	49.8	42.3
12	26A Kotari Road Days Bay	56.4	47.6	32.3
13	27 Bull Avenue, Wainuomata	51.0	45.0	33.9
14	177A Stokes Valley Road, Stokes Valley	51.9	43.9	38.6
14A	22 Harrison Grove, Avalon	47.9	43.9	39.1
Average		50.8	45.6	38.0



CBD






17	Level 1, 21-23 Andrews Avenue, Central Hutt	54.8	47.7	40.5
-----------	---	------	------	------

Railway Corridor

14B	86 Cambridge Terrace, Waterloo	60.2	55.1	50.6
18	Ava Park, Adj. Water Treatment Plant	62.3	51.7	46.3
19	3/86 North Street, Ava, Petone	54.0	49.2	45.7
Average		58.8	52.0	47.5

The above results are summarised in the following graphs;

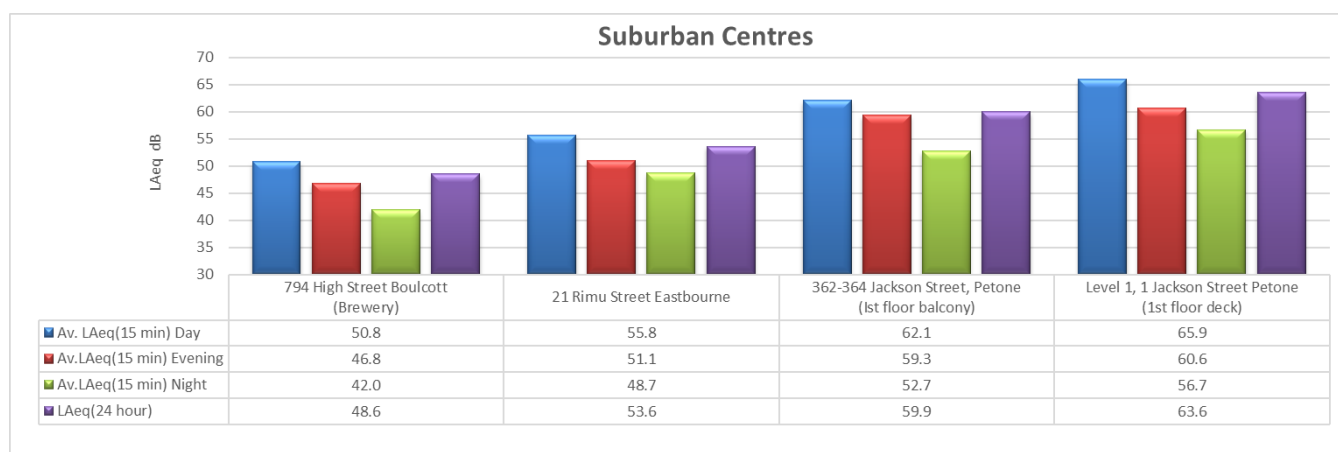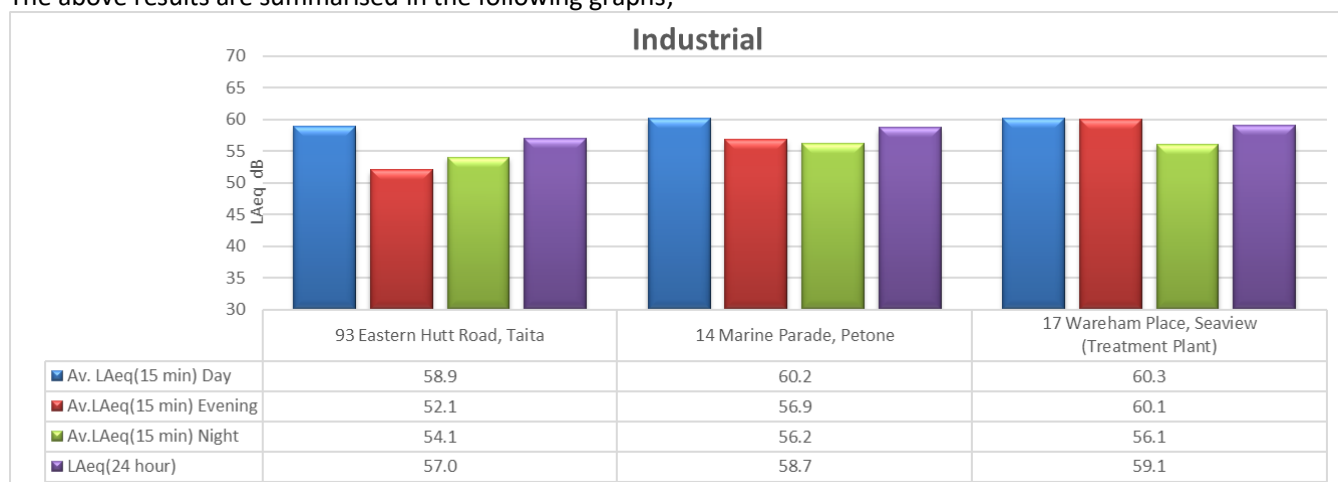

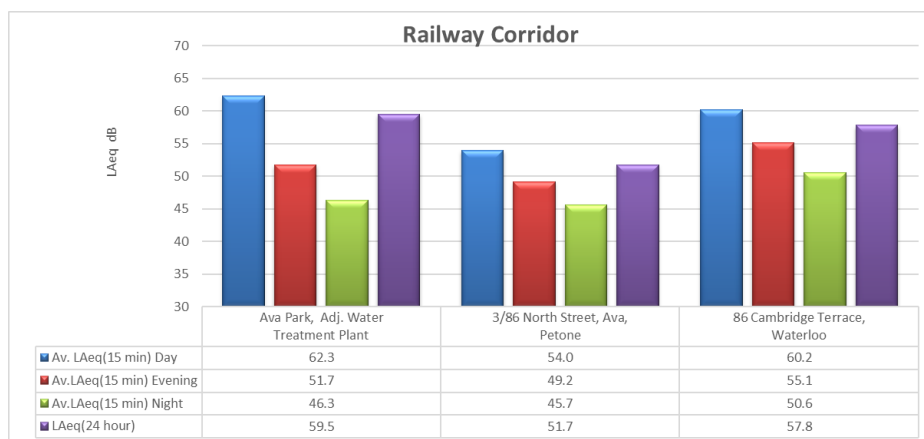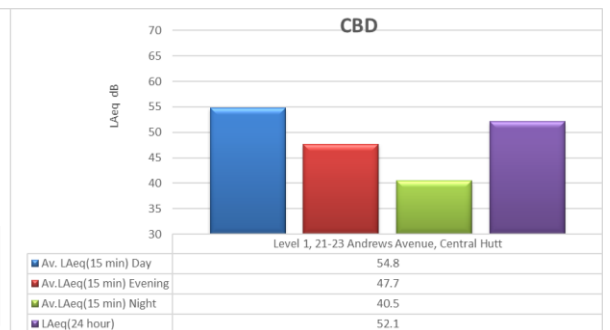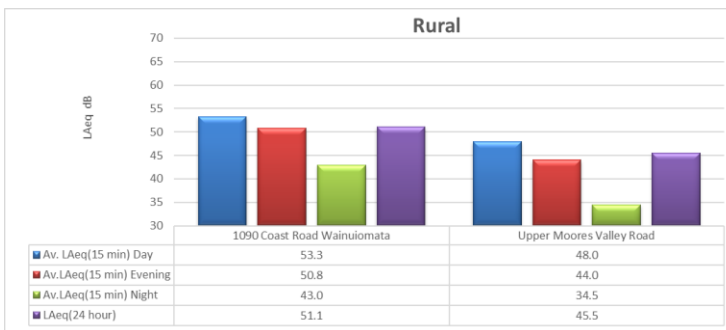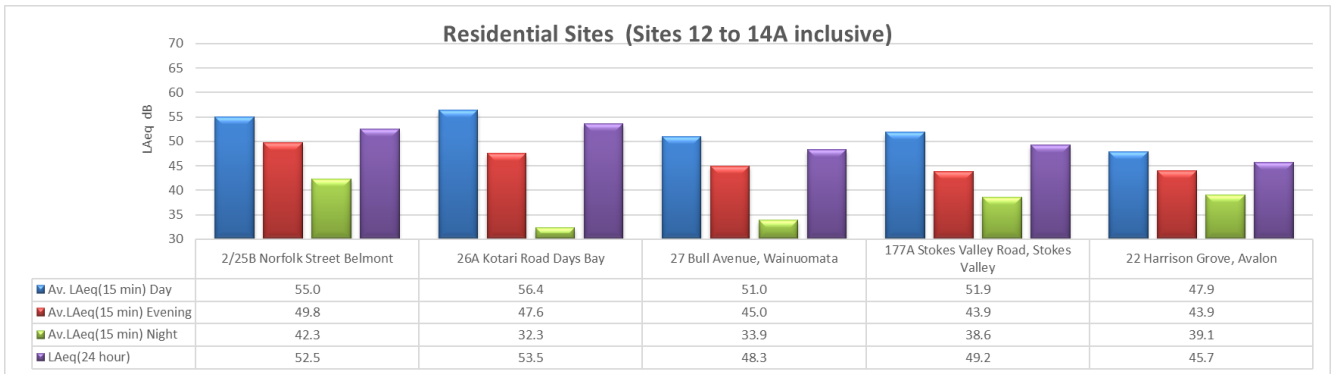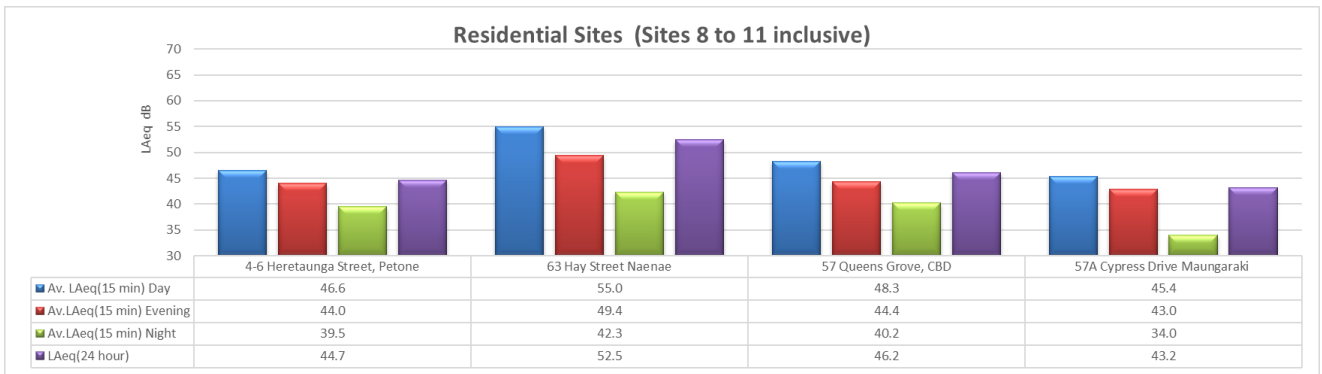


8.2.2 Results By Land Use Category

As a general observation, ambient levels were found to lower within residentially zoned areas, with lower night

time noise levels in particular – around 90% of residential sites measured at less than 40 dB average LAeq(15min) between 10pm and 7am, with the results also showing minimum average 15 minute sound levels at night time often as low as 35 dB or less. Low ambient sound levels were also measured at the two rural sites, although passing traffic and cicada noise affected some readings. Higher ambient sound levels are naturally expected Industrial, Suburban Centres and Railway Corridor areas.

A comparison between the sampled land use categories is provided in the graph below of average daily (LAeq(24 hour) sound levels. The results show as averages for individual sites sharing the same land use classification. Noise levels are quantified using LAeq(24 hr) which represents daily average sound levels;

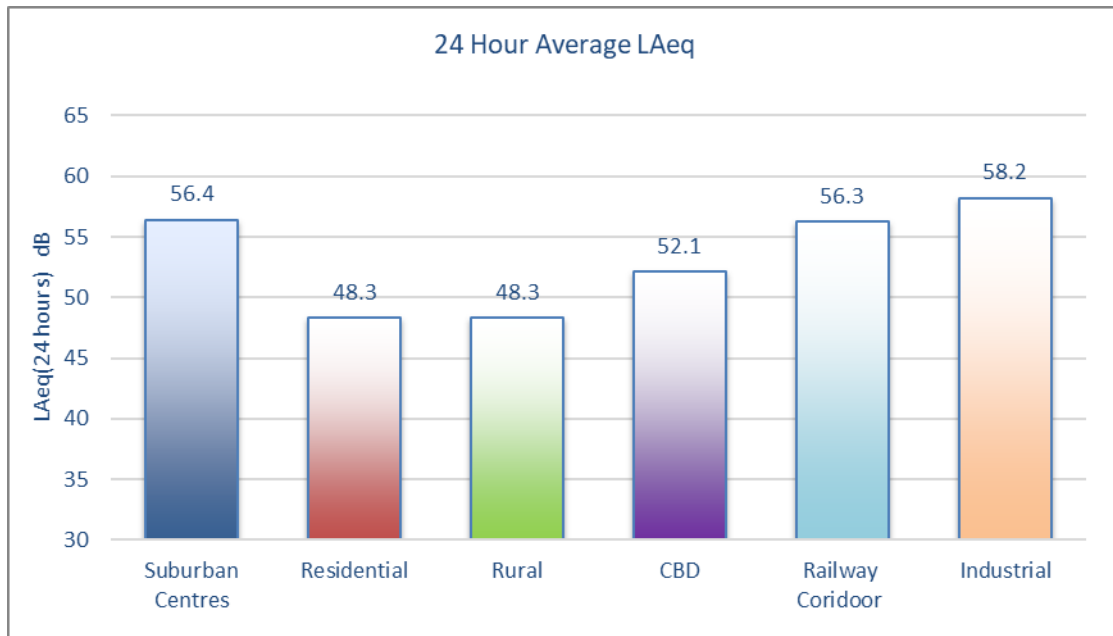


This above comparison reflects the expected picture whereby commercial and business areas exhibit elevated average sound levels due to the intensity of activity taking place in these areas. Sites at which residential or rural activities take place have been found to measure at lower levels and will correspondingly represent areas with higher amenity values.


According to the measurements taken, and the above criteria, ambient environmental noise is being received within sensitive receiving environments in Lower Hutt are generally suitable for residential use. Situations where sensitive uses establish within areas experiencing ambient sound levels above guideline values are addressed within this review of the operative plan, principally via improved acoustic insulation (and associate ventilation) recommendations (as set out in Sections 10 & 11 below) which is the widely accepted method for district plans to address potential reverse sensitivity noise effects.

8.2.3 Results By Time Of Day


The average LAeq(15 min) sound levels measured within each land use category across different periods of the day (daytime 7am to 7pm, evening 7pm to 10pm and night time 10pm to 7am) are set out as follows;

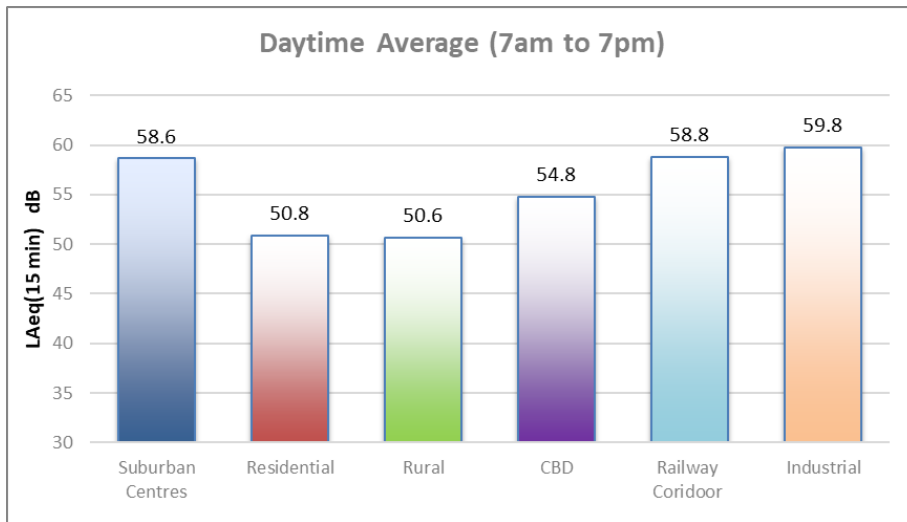

Ambient sound levels measured during the evening time (7pm to 10pm) exhibit a similar pattern to average daytime time levels, but with the readings reduced across all sites by 3 to 7 dB.

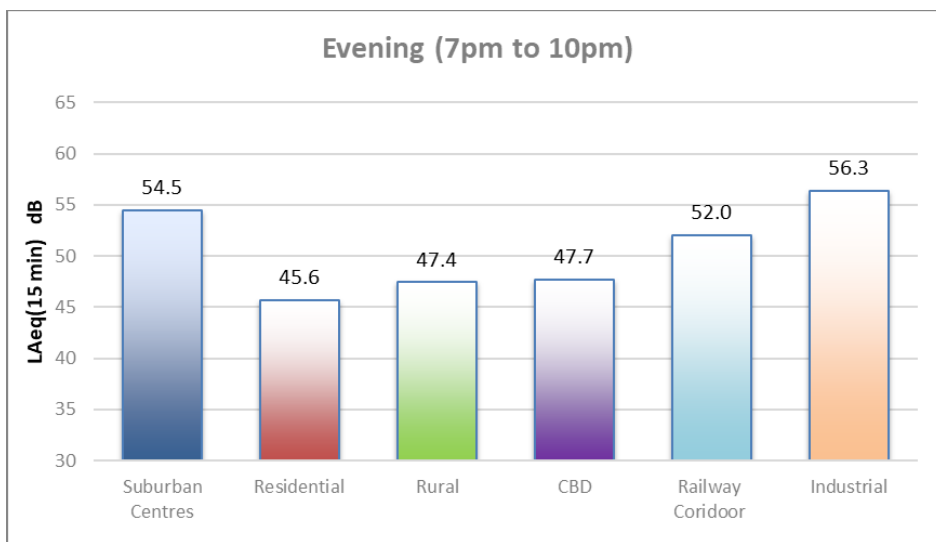

Reasonably low average ambient levels during night time (10pm to 7am), as shown in the following graph;

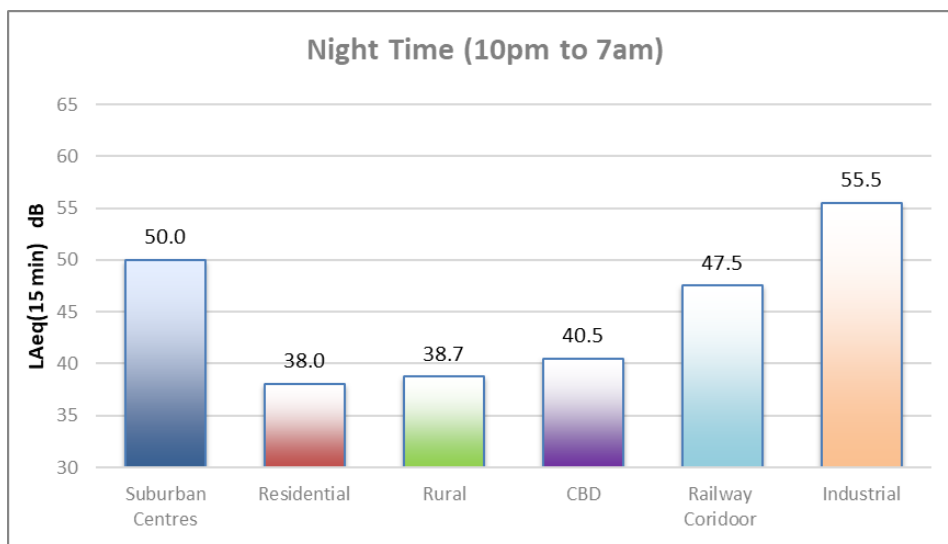

Night time average LAeq levels measured at rural and residential sites did not, on average, measure above 40 dB signalling the suitability of these areas of the existing night time environment for noise sensitive activities. This

compares favourably with *European Night Noise Guidelines*⁵ which set out that outdoor levels averaging 40 dB or less meets or exceeds the precautions necessary to protect the public, including most of the vulnerable groups such as children, the chronically ill and the elderly, from the adverse health effects of night noise.

Under these European guidelines, it is interesting to note measures to control outdoor noise levels to LAeq 55 dB is only recommended as an interim target for the countries where the 40 dB target cannot be achieved.

Due to increased activity during daytime hours, outdoor ambient sound levels measure at levels significantly above typical evening and night time noise levels. This is consistent with known patterns of environmental noise variations throughout the day.

Regarding the range of daytime measured noise levels shown above, daytime average sound levels mostly measure below LAeq 55 dB during daytime in noise-sensitive areas such as rural and residentially zoned sites. Business, commercial and rail-noise affected sites receive, on average, ambient sound levels above LAeq 55 dB.

The 1999 World Health Organisation guidelines in Chapter 4 “Guideline Values”⁶ recommend average daytime outdoor sound levels measuring 55 dB LAeq or less would be sufficient to protect the majority of people from being highly annoyed during the daytime.

The above results to confirm that measured outdoor ambient sound levels measure 48 to 58 dB LAeq(24 hr), a level generally compatible with residential and noise sensitive activities as shown within this summary of WHO recommended indoor and outdoor noise levels⁷ in areas where activities sensitive to noise take place;

Specific Environment	Critical health effect(s)	dB LAeq
Outdoor living area	Serious annoyance, daytime & evening.	55
	Moderate annoyance, daytime & evening.	50
Dwellings, indoors Inside bedrooms	Speech Intelligibility and moderate annoyance, daytime & evening.	35
	Sleep disturbance, night-time.	30
Outside bedrooms	Sleep disturbance, window open (outdoor values) night-time.	45

The presence of outdoor sound levels above 55 dB signals a need for the district plan to promote acoustic insulation requirements to protect sound levels experienced indoors within new and altered habitable rooms in affected areas. The measures to address reverse sensitivity recommended in Sections 10 and 11 below are aimed at ensuring the proposed district plan implements suitable acoustic insulation (and associated ventilation requirements) as a means of managing reverse sensitivity noise effects in commercial, business and industrial areas, also within transport-noise affected corridors alongside the state highway and rail tracks that pass through the district.

9 Noise Complaints

Apart from managing the effects of environmental noise via noise emission limits within the District Plan (or within conditions attached to resource consents), Council also manages the effects of environmental noise via staff or contractor investigations following complaints received, including operating an all-hours noise control service call-out service to investigate after hours noise complaints.

⁵ *Night Noise Guidelines For Europe* World Health Organization 2009. ISBN 978 92 890 4173 7

⁶ World Health Organisation ‘Community Noise Guidelines’ 1999 <https://www.who.int/docstore/peh/noise/Comnoise-4.pdf>

⁷ WHO 1999 Community Noise Criteria

Generally there two ‘types’ of noise complaints are received and acted upon by Council, being a temporary ‘excessive’ noise situation requiring action or complaints of ‘unreasonable’ noise which often involve commercial or industrial activities on sites bear to noise sensitive areas.


9.1 Excessive Noise

Complaints of ‘excessive’ noise, often during night time, made by members of the public to Council frequently due to amplified sound associated with house parties or noisy activities undertaken at commercial premises. The term “excessive noise” is defined as noise that unreasonably interferes with the peace, comfort and convenience of other people.

Complaints ‘excessive noise’ are typically received on the afterhours call line. Once the validity of the complaint is established (often requiring a call-back) a delegated officer may visit the premises where the sound is emanating to investigate. The key decision for the officer is whether the noise is excessive under the circumstances. No sound level measurements are needed as this is a subjective assessment made at the time. It is therefore quite often found that sound deemed "excessive" in one situation can be acceptable at other times of the day and in other circumstances.

If necessary, the delegated Council officer may issue an “Excessive Noise Direction Notice” to require the immediate abatement of the noise nuisance. Furthermore, under some circumstances where repeat warnings are ignored, the officer may confiscate the offending sound system or controller.

Council records⁸ of investigations into complaints from residents of the district complaining of excessive noise over the period to 30th June 2018 to 30th June 2021 reveal Council receives around 70 noise complaints per week. A breakdown of the numbers of complaints received and complaints requiring further action are summarised in the following graph

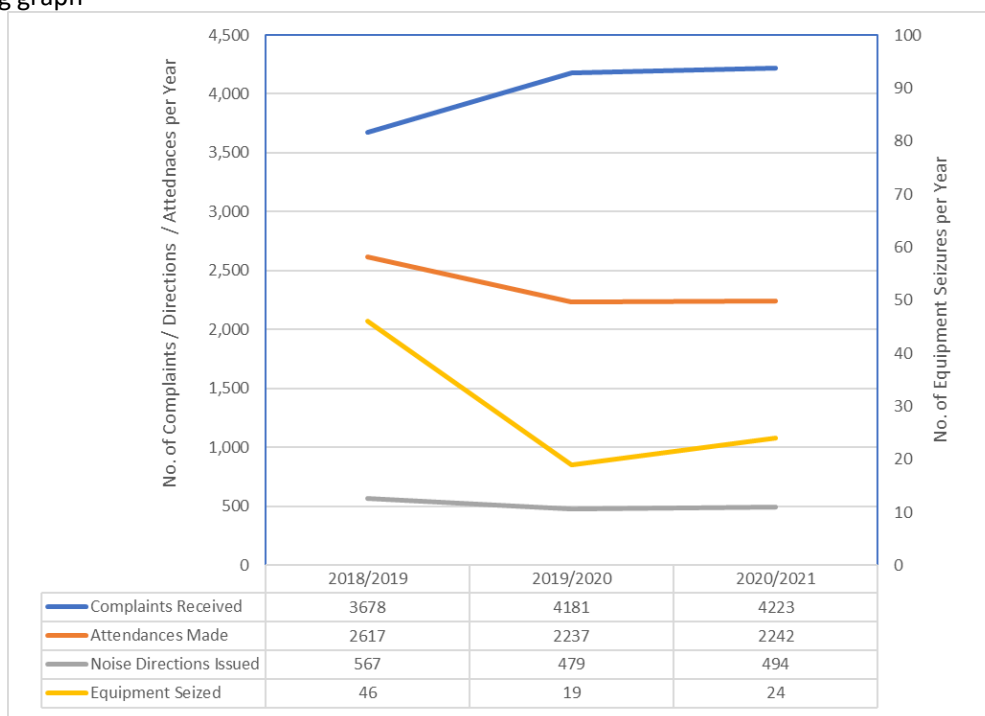

Although the many complaints received in this 2018 to 2021 sample are related to activities taking place in Business or Commercial areas, the majority of complaints of excessive noise arise from residentially zoned sites.

9.2 Investigations of ‘Unreasonable’ Noise

This is where the noise complained of is frequently experienced, possibly due to a residence causing persistent noise emissions or possible a commercial operation or venue. Often the effects are aggravated during night time hours when ambient sound levels in the receiving environment reduce, and where people generally become more

⁸ Council’s Environmental Health Manager *pers comm*

noise-sensitive (e.g. after 10 pm). A list of historical investigations into complaints of “unreasonable noise” carried out by Council since 2010, their location, type of noise and ‘outcome’ comments are attached as APPENDIX B.

Investigating complaints of unreasonable noise requires Council’s environmental officers to visit and investigate the issue, often requiring a technical solution to ensure mitigation sufficient to resolve the problem complained of. The investigations may involve noise measurements to determine compliance with district plan permitted activity standards, or other guidelines.

In some situations enforcement action using abatement notices and enforcement orders is necessary to abate the noise effects, where these are tangible and on-going. Such mechanisms are intended to allow sufficient time to carry out measures to mitigate or remedy the noise problem, whereas excessive noise provisions of the Act are intended to deal with situations where immediate mitigation is both necessary and feasible.

As an enforcement tool, abatement notices are sometimes issued by Hutt City Council under s322 of the Act to enforce noise control measures where necessary. Abatement notices require certain noise control actions to be taken (including requiring the noisemaker to obtain technical advice) within specified time frames and are enforceable at the Environmental Court. We understand there are about twenty noise-related abatement notices in force at present (July 2021). Typically, abatement notices are issued to residential properties regarding frequent emissions of loud amplified sound although fixed plant such as heat pumps are commonly involved.

Council records of noise complaints received show some growth in complaints received but not necessarily growth in the enforcement actions such as issuing of notices or equipment seizure needing to take place.

There are a wide range of factors that affect whether or not a person lodges a noise complaint⁹. Compared to ‘unreasonable’ noise, complaints of excessive noise occur more frequently within the historical noise complaint record. Steps taken by Council to address excessive noise may have effectively addressed the source at the time however, to reduce complaint numbers in the future to any large degree will require sociological and societal changes not readily apparent, possibly involving a more tolerable community.

While most complaints received are related to ‘excessive’ noise, District Plan noise provisions are important within the steps taken by Council to address and mitigate environmental noise causing complaints. The district plan establishes permissible noise levels often referred to within abatement notices and enforcements orders, these being among the more forceful tools available to Council to address adverse effects of environmental noise in the district.

10 Review Of Operative Plan Noise Provisions

10.1 Chapter 14C

Chapter 14C 1.1 sets out the noise policies of the district plan which are;

- a) To recognise that background noise levels are markedly different throughout the City.
- b) To recognise that acceptable noise levels will vary according to the nature of the principal activities occurring within activity areas.
- c) To ensure that residential activity areas are protected by establishing appropriate noise levels at the interface between residential activity areas and non-residential activity areas.
- d) That maximum noise levels are established within each activity area to ensure that amenity values are protected.
- e) To make provision for those situations where there has already been considerable history to the establishment of specified noise conditions.
- f) To recognise that noise levels may be different through a construction phase.

⁹ Nivison, M.E., Endresen, I.M. *An analysis of relationships among environmental noise, annoyance and sensitivity to noise, and the consequences for health and sleep.* J Behav Med 16, 257–276 (1993).

- g) To recognise that Noise Management Plans may be appropriate to manage matters beyond those addressed in this District Plan.

Chapter 14C sets out permitted activity noise standards within the following noise rules;

District Plan Rule	Noise Limits For Specified Activity Areas
14C 2.1.1	All Residential Activity Areas Noise Areas 1 Noise Areas 2 Noise Areas 3 Noise Areas 4 Noise from specific sites: Bellevue Hotel Oxford Terrace/Waterloo Road (Ambulance Station) Stokes Valley Bus Depot Wainuiomata Bus Depot Waterloo Bus Depot
14C 2.1.2	Central Commercial Activity Area & Petone Commercial Activity Areas 1 & 2
14C 2.1.3	Suburban Commercial Activity Area and Suburban Mixed Use Activity Area
14C 2.1.4	Special Commercial Activity Area
14C 2.1.5	General Business Activity Area
14C 2.1.6	Special Business Activity Area
14C 2.1.7	Avalon Business Activity Area
14C 2.1.8	Extraction Activity Area
14C 2.1.9	Rural Residential Activity Area
14C 2.1.10	General Rural Activity Area
14C 2.1.11	Community Health Activity Area
14C 2.1.12	Community Iwi Activity Area 1 - Marae
14C 2.1.13	Community Iwi Activity Area 3 - Kokiri Centres

The following observations and recommendations have arisen from our review of the noise provisions of the Operative District Plan;

10.2 Noise Chapter Structure

As the structure of the noise chapter of the Proposed District Plan will need to conform with the format required by the Part 4 of the National Planning Standards (discussed at section 6.7 above). Part 7 of the National Planning Standard sets out that noise matters will need to be addressed as a “District Wide Matter”. The Standard requires that, if provisions for managing noise are to be addressed (which is the case recommended by this review) then they must be located in the Noise chapter and include:

- a) noise provisions (including noise limits) for zones, receiving environments or other spatially defined area
- b) requirements for common significant noise generating activities
- c) sound insulation requirements for sensitive activities and limits to the location of those activities relative to noise generating activities.

To conform with the National Planning Standard it will be necessary to revise the number of “Activity Areas” of the operative plan with adjustment to the number of different noise rules currently set out within Rules 14C2.1.1 to 14C2.1.13.

Recommendation:

It is recommended the Proposed Plan noise provisions be included as a standalone chapter, with contents and structure to be in accordance with National Planning Standards for district plans.

10.3 Noise Maps

The Operative District Plan adopts a rather novel approach to describe the decibel noise limits. For residential areas the operative District Plan sets out “Noise Areas” independently from land zoning. There is a complex relationship between zoning maps and the mapped areas within which different noise limits apply. There are 63 separate site/activity specific noise rules making the noise chapter quite complex and difficult to navigate.

Although the site specific noise limits and related noise maps are designed to achieve a sustainable noise environment compatible with the policies and objectives of the District Plan, we do not consider the existing complex approach offers any significant advantage to using typical “Zone Rules” to demarcate areas where different noise limits should apply. We see the “Noise Maps” approach as potentially working against establishing a strong linkage between the Plan policies and objectives and the control over noise effects where there are geographical differences between the zoning maps and the maps depicting where the different noise limits are to apply.

Recommendation:

It is recommended the Proposed Plan noise provisions be based on noise rules applying within each zoned (mapped) area in accordance with National Planning Standards for district plans, as opposed to the operative plan approach whereby noise rules rely on a separate series of maps or site-specific noise limits.

10.4 NZ Standards

Chapter 14C sets out the basis of the Operative District Plan noise limits and controls. Rule states that noise within the District Plan is intended to be measured and assessed in accordance with New Zealand Standard 6801:1991 *Measurement of Sound*, New Zealand Standard 6802:1991 *Assessment of Environmental Sound*. Both these 1991 Standards have been superseded and should be replaced with reference to the latest (2008) versions.

Recommendation:

As required by National Planning Standards (discussed at section 6.7 above) it is recommended the Proposed District Plan include reference to the latest versions of the relevant NZ Standards that deal with noise-related matters.

10.5 Sound Level Descriptors L_{Aeq} and L_{AFmax}

One of the main consequences of updating NZS 6801 and NZS 6802 to 2008 standards is a change in measurement descriptors or noise metrics. Background sound level [previously L_{A95}] was changed to L_{A90} in the 1999 version. The change was an update consistent with international usage in BS4142:1997¹⁰ and ISO 1996-2:2007. The 1999 revision replaced the LA10 descriptor with L_{Aeq} , technically referred to in the 1999 and 2008 versions as the ‘time average sound level’, being denoted as $L_{Aeq[t]}$. What is vital about the $L_{Aeq[t]}$ is the measurement or assessment period [t] is required by both the 1999 and 2008 versions to be stated.

The current LA10 descriptor was originally adopted as it was demonstrated to have a reasonably good correlation with the degree of annoyance experienced by a typical person and was easy to calculate. Furthermore LA10 could be determined from analogue sound level meters by the visual mean maxima estimation method acceptable at the time.

¹⁰ BS 4142:1997 -- Method for rating industrial noise affecting mixed residential and industrial areas

The introduction of L_{Aeq} in the 1999 and now 2008 standard is considered to be on a ‘firmer foundation’ and appropriate as international research had shown that the L_{Aeq} descriptor has a greater degree of correlation to noise annoyance than LA_{10} , and for this reason was widely accepted as being the preferred noise descriptor for use in environmental noise standards and noise limits. Furthermore the L_{Aeq} level, being unrelated to the statistical variation in sound levels, is more readily predicted, which is a considerable advantage over LA_{10} . As noted above, by its very nature, L_{Aeq} , is related to a specific time interval and will only provide a valid description of a sound environment if the measurements cover the range and variability of that sound environment.

It is generally accepted that this difference is typically be 2-3 dB for “common” sounds but may be larger for some specific situations. In the case of simple constant sound sources with a fixed spectrum, such as mechanical plant, all descriptors would measure at the same level, that is $LA_{10} = LA_{eq} = LA_{90} = LA_{max}$. For more complex variable sound sources such as noise from passing road traffic, the difference between L_{Aeq} and LA_{90} for the same reference time interval is typically around 2.5 dB at receiver locations.

The 2008 version of NZS6802:2008 standardises the reference time interval of 15 minutes. This allows limited averaging over 15 minutes. This allows a slight relaxation in allowable levels for sounds that are only present in for short periods. In addition to 15 minute L_{Aeq} sound levels, for night time NZS6802:2008 recommends District Plan noise limits include a “single event” noise control in the form of a limit measured L_{Amax} sound levels received at sensitive sites. This is denoted as L_{Amax} which is the maximum A-frequency weighted, Fast-time weighted, sound pressure level in decibels. L_{AFmax} criteria is set for night-time hours only as it is used to protect sleep from disturbance, which needs to be in place over periods such as 9 hours so as to protect during both the onset of sleep and to protect awakening during the night.

L_{Amax} limits should not be applied through rules or performance standards to sounds received at sensitive receiver sites during day time. The typical sound environment experienced in sensitive residential settings for example, during daytime will typically exceed L_{AFmax} criteria adopted for sleep protection, mostly without any adverse effect.

Recommendation:

Adopt L_{Aeq} and L_{Amax} as the main noise descriptors of the Proposed District Plan.

Adopt recommended convention when stating noise limits – this being ‘value-unit-descriptor’ e.g. **55 dB**

$L_{Aeq[15 min]}$, 45 dB $L_{Aeq[15 min]}$ and 70 dB L_{AFmax} .

10.6 Time of day

District Plan noise limits are usually set lower for a defined ‘night time’ period reflecting people’s increased sensitivity to noise during these hours. Whereas the operative plan applies noise limits separately for daytime (7am to 10pm) and night time (10pm to 7am), it is a recommendation of NZS6802:2008 to consider the application of a ‘evening’ noise limit to cover a period of time when activity and outdoor noise levels are lowering (increasing the intrusive of noise that annoys) yet the increase in sensitivity is limited compared to night time (after 10pm) when most people would go to bed. Applying a limit set mid-way between the daytime and night time noise limits is considered best practice as it matches the control of adverse noise effects in a manner that takes account of the environment occurring at the time. It is interesting to note the results of recent (2021) ambient sound level monitoring in the district indicated sound levels do typically taper off after early evening peaks and reduce towards 10pm in the evening. Thus recommendations are made below for future noise rules to be formatted so that there are separate noise limits for daytime (7am to 7pm), evening (7pm to 10pm) and night time (10pm to 7am).

Recommendation:

We recommend separate daytime/shoulder/ night time noise limits, adopting a widely adopted definitions as daytime (7am to 7pm), evening (7pm to 10pm) and night time (10pm to 7am).

10.7 Day Of Week

Current District Plan noise limits are for night time generally apply between 10pm and 7am (with some exceptions). However, Rule 14C 2.1(d) states that the lower night time apply “...between the commencement of the lower level on a Saturday evening and Monday morning, and Public Holidays”. Thus, the operative plan

requires the lower, more restrictive 'night time' noise limits to apply during Daytime on Sundays (and during daytime on public holidays). This attempt to provide for 'quiet Sundays' is not a recommendation of any Standard or guideline, but rather is seen as an artefact of a desire to achieve quieter living conditions for religious or cultural reasons. Typical daytime sound levels measured on Sundays within residential areas in the Hutt district are not noticeably quieter than other days of the week. A series of recent traffic noise readings taken in 2020 in Lower Hutt (see Section 10.9.1 below) indicates 24 hour average traffic noise levels are remarkably consistent at each site across different days of the week. Sundays measured only 1 to 2 dB below noise levels found on other days of the week.

In our experience, there are difficulties with applying a night time noise limit to control noise from activities taking place during daytime on Sundays and statutory holidays. Often it is not possible to monitor compliance with this artificially low noise limit due to elevated ambient noise levels during daytime on these days.

From our research we find there are no policies or guidelines that recommend applying night time noise limits during the daytime on Sundays and public holidays in New Zealand.

The relevant NZ Standard (NZS6802:2008) recommends that if a Sunday daytime noise limit is necessary, this be set as a 'daytime' limit and does not recommend using night time limits for assessing daytime noise on Sundays. As the results of noise monitoring carried out in 2021 in the Hutt district did not show evidence of lower ambient sound levels on Sundays during daytime at residential sites, recommendations below set out noise limits that apply equally across all days of the week.

Recommendation:

We recommend separate daytime/shoulder/ night time noise limits be apply consistently across all days of the week.

10.8 Noise Assessment Location

There is some inconsistency with where compliance with the stated noise limits within the Operative Plan are to be determined. For example, Rule 14C 2.1.10 (Noise limits For General Rural Activity Area) limits noise received for all neighbouring sites:

All non-residential activities must not exceed the conditions as specified, measured anywhere beyond the site on which the activity takes place -

Maximum 50dBA 7.00am - 10.00pm

Maximum 40dBA 10.00pm - 7.00am

[Emphasis added]

In addition, Rule 14C 2.1.8 governing noise from activities within defined Extraction Activity Areas applies site boundary noise limits to quarrying activities.

The approach of Rules 14C 2.1.10 and 14C 2.1.18 means that noise due to rural and quarry activities are controlled to the stated noise limits measured anywhere within another site, even at sites remote from any dwelling. While Chapter 8 of the operative plan seeks to control effects of activities which be detrimental to the existing rural character and amenity values of the zone, the key policy in this regard (Policy 8A 1.1.1(b)) is only concerned with rural character and amenity values in relation to rural residential sites. This seems inconsistent with rules requiring activities to meet residential type noise limits at any point within rural lots which can be quite large with dwellings not normally located near to site boundaries. The assessment location for assessing compliance with noise limits in the rural zone specified by Rule 14C 2.1.10 can cause compliance difficulties as the site boundary can be some distance from the dwelling in rural areas, meaning that noise levels complying at the site boundary may be needlessly protect areas of vacant land. In addition, noise non-compliance at the site boundary may cause planning complications¹¹ yet noise experienced around the dwelling could be quite acceptable.

¹¹ An activity may be assessed as non-compliant with site boundary noise limits but, due to the distances involved, would have a *di minimis* effect in terms of noise experienced at or around the dwelling.

Best practice in terms of noise compliance assessment locations for use in rural areas (and the approach adopted within NZS6802:2008) is to apply limits on noise received within any parts of sites zoned residential (to ensure the whole site is adequately protected) however in the Rural zones noise compliance with 'residential' type noise limits are best assessed within the 'notional boundary'¹² to any existing dwelling on any other rurally zoned site, or at any location within any site zoned for residential purposes. If site boundary noise limits are contemplated in rural zones, it is considered more reasonable to set a higher noise limit (say 60 dB).

Clause 8.4.6 of NZ Standard NZS6802:2008 makes it clear that unless special planning reasons exist to justify using the site boundary approach *"... the appropriate location for assessment of noise in rural character areas with large lot sizes, should be 'at any point within the notional boundary of a dwelling' and this may include some rural-residential areas"*.

Although the recommendations of NZ Standard NZS6802:2008 do not rule out the 'site boundary' approach in noise rules, the notional boundary approach to noise management in rural zones is widely adopted within district plans in New Zealand and is considered best practice. The operative plan 'site boundary' approach could be difficult to justify as an effects-based approach to managing noise in the rural zone where policies dealing with rural amenity are based around amenity experienced around rural residential sites, which appears to be the focus of the operative plan.

Recommendation:

We recommend adopting the notional boundary approach to the control of noise in rural areas. This should be defined consistent with the National Planning Standards which defines the notional boundary as recommends *"a line 20 metres from any side of a residential unit or other building used for a noise sensitive activity, or the legal boundary where this is closer to such a building"*. The applicable noise limits recommended to apply at these locations is discussed in Section 11.2 below.

10.9 Noise Character

Reference to NZS6802:1991 in the operative plan ensures the operative plan appropriately assesses sounds containing "special audible characteristics" when assessing compliance with noise limits. This approach suitably deals with added annoyance such sounds may cause - sounds such as those that are highly tonal or impulsive sounds.

Like its 1999 predecessor, NZS6802:2008 also implies that the intrusiveness of a sound is not just a function of its sound level but is also affected by its character such as tonality or impulsiveness. The procedures of NZS6802:2008 require that, if justified, received LAeq sound levels are adjusted upwards (penalised) to account for the additionally annoying character of the sound. The penalty is applied by adding 5 dB to the measured sound level before determining compliance with the stated noise limit.

The recommendation is to adopt NZS6802:2008 reflecting the generally held position that such penalties should continue to be applied (where justified) to protect against effects of sound possessing special audible characteristics in all parts of the district.

Recommendation:

We recommend the full provisions of NZS6802:2008 across the whole district. This means ensuring each rule stipulating decibel limits are accompanied by words to the effect *"Sound levels shall be measured in accordance with NZS6801:2008 Acoustics - Measurement of Environmental Sound and assessed in accordance with NZS6802:2008 Acoustics – Environmental Noise."*

¹² The notional boundary is defined within NZS6802:2008 however we recommend the slightly nuanced wording required to be adopted by the National Planning Standards which recommends *"a line 20 metres from any side of a residential unit or other building used for a noise sensitive activity, or the legal boundary where this is closer to such a building"*.

10.10 Noise From Coastal Activities

10.10.1 Coastal Areas

The Hutt district has a significant length of coastline. Responsibility for managing the effects of noise under the RMA apply to all activities located on the landward side of 'mean high water springs' located along the coast. Our review has found no major adjustments to operative District Plan noise controls are necessary to control noise effects likely to be experienced within the Coastal Marine Area (CMA) which is the area between mean high water springs and a line nautical twelve miles out to sea.

Noise received on land from noise sources located within the CMA are managed by the Wellington Regional Council which has responsibility for noise received on land, from sources located in the CMA. This is achieved by the Wellington Regional Plan which sets out rules to limit the emission of noise from permitted activities¹³ taking place in the CMA. For the purposes of noise control, the Regional Plan has noise limit controls for noise emitted from within 'Commercial Port Areas' separately applying alternative noise limits for noise sources located in all other coastal areas.

The Seaview Wharf and pipeline in Lower Hutt operated by CentrePort Limited Group enables over 1 million litres per year of petrol, diesel and jet fuel to be bought ashore from ships to holding tanks to be stored and distributed from the Seaview industrial area. Significant investment has recently been made to improve earthquake resilience of this system¹⁴.

Rule 5.7.2(q) is a coastal management 'general condition' which limits noise from activities taking place within the Commercial Port Area (as shown below) to comply with the following noise limits when measured at any point 'on' the nearest Residential Area boundary;

<i>Time (any day) Limits</i>	<i>LAeq</i>	<i>LAmix</i>
<i>7am – 11pm</i>	60 dB	-
<i>11pm – 7am</i>	<i>45 dB</i>	<i>75 dB</i>


This rule limits noise from activities within the port. A companion rule (Rule 5.7.2(p)) applies to noise generated by activities in the CMA but are located outside the port operational area shown in 'Map 34'. This rule limits noise measured at any point on the nearest Residential Area boundary;

<i>Time (any day) Limits</i>	<i>LAeq</i>	<i>LAmix</i>
<i>7am – 11pm</i>	55 dB	-
<i>11pm – 7am</i>	<i>45 dB</i>	<i>75 dB</i>

[emphasis added].

¹³ Proposed *Natural Resources Plan For The Wellington Region - Appeals Version (2019)*

¹⁴ <https://www.stuff.co.nz/national/125558087/80m-quakeresilience-upgrade-for-lower-north-islands-fuel-supply-line-in-lower-hutt>

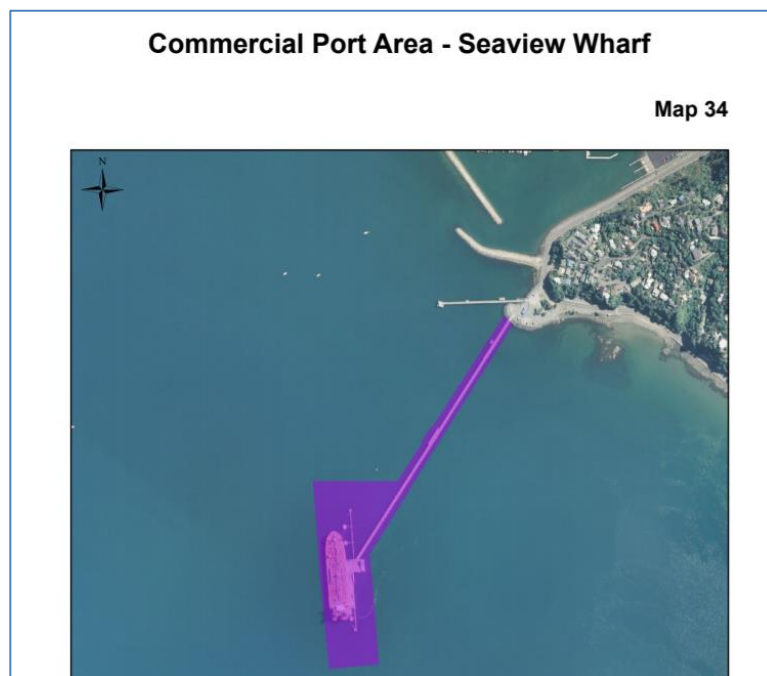

Both of the above rule requirements;


- Exempt noise generated by navigational aids, safety signals, warning devices, or in emergency circumstances.
- Compliance to be based on measurements taken in accordance with NZS6801:2008 with results assessed in accordance with NZS6802:2008.

Recommendation

Noise from activities taking place within the CMA, adjacent to the Hutt district boundary, is considered to be reasonably controlled under Wellington Regional Plan requirements. Council has no jurisdiction to control noise generated by activities taking place in CMA. In any event, it would not be appropriate for the Proposed District Plan to include a second set of limits on noise from port or other activities taking place in the CMA.

10.10.2 Point Howard Business Activity Area

Assessing the effectiveness of noise provisions applying to activities taking place on the Seaview wharf needs to also consider the noise standards requirements of district plan Chapter 14C 2.1.5 (b) 31 which apply to activities taking place within the General Business Activity Area shown below which lies on the landward side of mean high water springs.

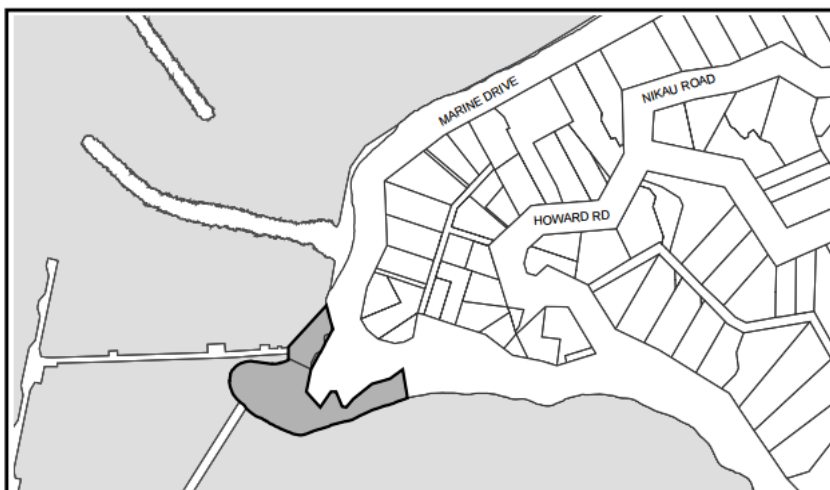

Limits on noise due to activities taking place in the General Business Activity Area received within any site zoned residential or recreation activity area, are summarised as

LA10 60 dB	7.00am - 11.00pm
LA10 45 dB	11.00pm - 7.00am
LAMax 75 dB	10pm to 7am

A daytime noise limit of LA10 60 dB exceeds the generally accepted maximum recommended outdoor noise levels for adequate protection of residential sites (LAeq 55 dB as per NZS6802:2008) by 2 to 3 dB taking into account differences in LA10 and LAeq units.

Recommendation

Regardless of the change in noise unit (LA10 to LAeq) setting noise limits within the Proposed Plan may, in places, require noise limits to be justified which exceed available guidance on maximum daytime noise received within residential sites (e.g. LAeq 57 or 58 dB).

10.11 Managing Reverse Sensitivity Effects

Reverse sensitivity is the vulnerability of an established land use to complaint from a new land use. In practice such complaints can compromise the established land use. The operative district plan includes

The use of acoustic insulation as a means of managing reverse sensitivity noise effects in district plans is supported because;

- a) Given what is known of elevated daytime and night time ambient noise levels in some parts of the Hutt district (and their expected growth over time) and what is known of typical reductions in external sound achieved within typical NZ dwellings, requiring acoustic insulation for new buildings housing noise-sensitive activities in business and commercial areas will protect the health and well being of the future residents, as well as providing a measure to reduce reverse sensitivity for commercial operators of noisy activities.
- b) It is not difficult or expensive to reduce the level of exterior noise entering a building. The costs of incorporating the acoustic insulation methods adopted in 2004 into the Wellington City District Plan was found to be 5% to 8% of the capital cost of the dwelling. For inner city apartments this a lower figure was found as there are proportionately less external wall areas and roof areas requiring treatment.
- c) There are no legal barriers as the High Court has indicated (*Building Industry Authority and Christchurch International Airport v Christchurch City Council AP 78/96*) that it is within the powers of Local Authorities under the Resource Management Act to specify a certain level of acoustic insulation in plan rules and consent conditions, and that doing so would not conflict with the Building Act.

A discussion of matters relevant to the development of district plan rules requiring acoustic insulation of buildings housing noise sensitive activities within specified noisy areas are set out as follows;

10.11.1 Noise Sensitive Activities

The term “Noise Sensitive Activity” defines those activities to which reverse sensitivity actions are addressed in the Plan. Activities sensitive to noise need to be specifically provided for within rules and performance standards of the Proposed Plan to ensure land use compatibility and to enhance sustainable communities.

The operative District Plan currently defines this term as;

Noise Sensitive Activity means any:

- *residential activity;*
- *visitor accommodation, boarding house or other premises where residential accommodation for five or more travellers is offered at a daily tariff or other specified time; or*
- *childcare facility.*

This definition is considered too narrow as it does not include sensitive uses such as schools or marae, both of which include rooms with what could be termed 'critical listening environments'¹⁵.

It is recommended to re-examine and broaden this definition to ensure the effectiveness of the Plan's reverse sensitivity provisions. It is noted that no definition of "noise sensitive activity" is provided within the NZ National Planning Standard however the proposed definition below is based on the recommendations of NZS6806:2010 *Acoustics - Traffic Noise – New & Altered Roads*.

Recommendation

To preserve and enhance the effectiveness of the reverse sensitivity provisions of the proposed District Plan we recommend re-defining the term Noise Sensitive Activity more broadly as follows;

Noise Sensitive Activity means any activity sensitive to the effects of noise and vibration carried out within any:

- residential dwelling
- buildings used for visitor accommodation
- residential care facilities
- education and childcare facilities
- hospitals and healthcare facilities
- marae

10.11.2 Managing Effects on Noise Sensitive Activities

The operative District Plan applies a noise limit of LA10 65 dB daytime and 60 dB night time between sites in the Central Commercial Activity Area & Petone Commercial Activity Areas 1 & 2. The operative District Plan sets out acoustic insulation requirements apply to new or altered buildings housing noise sensitive activities establishing in these activity areas.

However, other zones where operative Plan provisions allow for noise to be emitted exceeding 55 dBA daytime and 45 dBA night time. In these areas ambient sound levels are likely to be elevated to such an extent that these areas would, at times, be unsuitable for noise sensitive activities establishing in these areas. This is because;

- i. A typical modern dwelling or apartment will reduce outdoor sound by 20 dBA, maybe up to 30 dBA, that is with windows closed. A reduction of 10 to 15 dBA occurs when windows are open. According to the readings taken, sensitive uses establishing in these area may receive outdoor sound levels of such magnitude that sound levels received within habitable rooms (windows closed) of up to LAeq 50 dB and LAmx 60 dB night time. This is with windows closed. Higher levels are likely indoors when windows are opened for ventilation purposes.
- ii. Maximum acceptable levels of sound within habitable rooms due to external sources should not generally indoors at levels above 35 dB for adequate protection of sleep. According to the World Health Organization (WHO) recommend indoor noise levels at night of no more than LAeq 30 dB and LAmx 45 dB for the avoidance of sleep disturbance. Satisfactory and maximum values are also included in AS/NZ 2107:2000 *Acoustics - Recommended Design Sound Levels and Reverberation Times for Building Interiors*. The standard prescribes slightly higher levels of 30 to 40dBA LAeq (8-hr) for sleeping areas on 'major' roads compared with 30 to 35dBA LAeq (8-hr) in bedrooms near 'minor' roads.

Chapter 5 acoustic insulation requirements to deal with noise from commercial activities are required within the Central Commercial Activity Area and Petone Commercial Activity Area.

Chapter 5 Commercial Activity Area Rule 5A 2.2.2 (b) and Rule 5B 2.2.1.1 (g)) set out sound insulation requirements for habitable rooms in new or altered buildings housing noise sensitive activities establishing in these zones. Sound insulation (outdoor to indoor) is stipulated to achieve a certain rating (Dtr,2m, nTw) which is concerned with quantifying the sound transmission qualities of building elements to sound on the outside wall of the room, with the reported decibel rating being dependent upon the frequency content of sound received within the habitable room. Operative District Plan Residential Objectives, such as Objective 4F 2.2 which encourages medium

¹⁵ As an example, the Queenstown Lakes District Plan defines 'critical listening environments' as any space that is regularly used for high quality listening or communication for example principle living areas, bedrooms and classrooms but excludes non-critical listening environments.

density residential development within Suburban Mixed Use and Central Commercial Activity Areas close to the public transport network. Effective and efficient district Plan rules to protect habitable rooms housing noise sensitive activities from noise will be important going forward.

Acoustic isolation requirements of Chapter 5 require protection from noise from outside the building by ensuring the external sound insulation level of habitable room meets the requirement of Dtr,2m, nTw > 30 dB¹⁶. This type of rule requires the external building envelope to resist outdoor sound by a stated amount (in this case > 30 dB).

Acoustic insulation rules which specify the performance of the building envelope in this manner differ markedly to the alternative ‘indoor noise limit’ type insulation rules as they base compliance on achieving specified maximum indoor level of sound due to outdoor sources rather than the acoustic qualities of the building construction. Acoustic insulation against state highway and rail noise within specified noise-affected areas within Standard 6 of Chapter 14 A Transportation of the operative District Plan¹⁷ is based on the ‘indoor sound limit’ approach. This approach has been found to be difficult for Council’s to implement and monitor when adopted within district plan reverse sensitivity acoustic insulation rules and can lead to an inconsistent design approach as different designers may assume (unwittingly) differing levels of outdoor sound¹⁸. The following formula extracted the NZTA guidance on insulation against traffic noise indicates the complexity involved when attempting to establish the outdoor traffic noise level;

$$d = K \times \text{AADT} \times \underbrace{\left(V + 40 + \frac{500}{V} \right)^{3.3}}_{\text{Traffic speed}} \times \underbrace{\left[\left(1 - \frac{p}{100} \right) \times 10^{\left(\frac{R_c}{10} \right)} + \left(\frac{p}{100} + \frac{5p}{V} \right) \times 10^{\left(\frac{R_t}{10} \right)} \right]}_{\text{Road surface (and traffic speed and composition)}}$$

Where:

d	Distance (m)
K	Constant factor related to noise level (1.82 x 10 ⁻¹⁰ for buffer area, 9.13 x 10 ⁻¹⁰ for effects area)
AADT	Annual average daily traffic (vpd) ^{19, 20}
V	Traffic speed (km/h)
p	Percentage of heavy vehicles (percentage points, eg for 12 %HV, p = 12) ^{19, 20}
R _c	Surface correction ¹³ for cars (dB)
R _t	Surface correction ¹³ for trucks (dB)

Formula for calculation of outdoor traffic noise levels extracted from page 9 of NZTA reversed sensitivity guidelines.

As there can be major uncertainties in designing the necessary level of acoustic insulation based on incorrect assumptions when calculating outdoor sound levels against which the insulation needs to act (including the ineffectiveness with which “A Frequency weighted” indoor sound levels account for low frequency sound insulation rules based around ‘external sound insulation level’ (Dtr,2m, nTw) are preferred as not only are the above problems avoided, but post-construction compliance can be checked by conducting field tests in accordance with ISO 140-5:1998 and ISO 717-1: 2013 *Acoustics — Rating of sound insulation in buildings and of building elements — Part 1: Airborne sound insulation*.

The most compelling evidence supporting the external sound insulation level (Dtr,2m, nTw) method is found within NZS6802:2008 *Acoustics – Environmental Noise*, Clause 8.6.9 which refers to acoustic insulation of buildings using methods verified using ISO 140-5:1998 and ISO 717.

Further evidence in support of adopting sound insulation rules based on the ‘external sound insulation level’ (Dtr,2m, nTw) method comes from NZS6806:2010 *Acoustics – Traffic Noise – Noise From New or Altered Roads*.

¹⁶ Dtr,2m, nTw is the standardised level difference (outdoor to indoor) and is a measure of the airborne sound insulation provided by the external building envelope (including windows, walls, ceilings and floors where appropriate). It is calculated using Acoustic insulation must be assessed in accordance with ISO 717-1:2020 *Acoustics — Rating of sound insulation in buildings and of building elements — Part 1: Airborne sound insulation*.

¹⁷ Expert advice received Council received on this topic (Plan Change 39 Marshall Day Acoustics report to Council officers) recommended district plan reverse sensitivity acoustic insulation rules based around specifying building performance (i.e. the Dtr,2m, nTw method).

¹⁸ *Managing Reverse Sensitivity Noise & Vibration Effects Of Rail and Road Transport in New Zealand*. New Zealand Acoustics - Journal of the NZ Acoustical Society, Vol. 28 / # 3, 2015.

This Standard recommends that where acoustic insulation against traffic noise is required as a mitigation measure under the Standard, clause 5.2.3.2 specifies that acoustic insulation performance of buildings be rated using the 'standardised level difference' method (Dtr,2m, nTw).

Recommendations

- Retain the existing approach of the Operative District Plan for stipulating sound insulation (outdoor to indoor) using the external sound insulation level method (Dtr,2m, nTw) in preference to insulation rules relying on 'indoor sound limits' measured using dBA.
- Retain and enhance existing reverse sensitivity requirements set out within Chapter 5 of the Operative District Plan that require sound insulation for habitable rooms in new or altered buildings housing noise sensitive activities. We recommend that these existing acoustic insulation requirements be adopted for all sites within the Mixed Use, Commercial Activity areas and within Business type zones and any other activity areas where district plan permitted activity noise standards allow for noise levels to be received at levels exceeding 55 dB LAeq[15 min] daytime or night time limits exceeding 45 dB LAeq[15 min] .

10.11.3 Managing Effects on Sensitive Activities Along Transport Noise Corridors

With significant road, rail and sea port operations passing through and servicing the district, Hutt City is characterised by environmental noise 'corridors' reflective of the layout of the road and rail network.

The Hutt roading network (see diagram below) generally has a north-south grid structure parallel to the Hutt River. North-south corridors through the centre intersected by east-west road connections perpendicular to the river provide local access and connectivity to the state highway (SH2). This diagram classifies roads under the One Network Road Classification (ONRC) system described in the Central City Transformation Plan (February 2019) and are listed in Appendix Transport 3 of the District Plan.

In the operative District Plan, SH2 is classified a 'Regional Road' and is classified as making a major contribution to the social and economic wellbeing of a region and connect to regionally significant places, industries, ports and airports. NZTA Waka Kotahi are responsible for the state highway and have developed guidelines recommended to be included in district plans which seek to avoid reverse sensitivity noise and vibration effects within defined corridors alongside the highway¹⁹.

There are no similar recommendations for protecting the local authority roading network from reverse sensitivity noise effects yet the importance of protecting infrastructure and facilities from inappropriate development on adjacent sites is signalled within existing provisions of the District Plan and within the recommendations of relevant NZ Standards for transport noise. HCC acted to strengthen reverse sensitivity measures related to transport noise and vibration effects within Plan Change 39 to the district plan²⁰.

Plan Change 39 (operative March 2018) introduced "Standard 6 - Development within the State Highway and Railway Corridor Buffer Overlays" into the plan as a means of managing potential reverse sensitivity effects from noise sensitive activities establishing near to the state highway or railway corridors. Standard 6 addresses reverse sensitivity effects of the state highway or rail network by defining 'noise effects' areas and applying district rules to require acoustic insulation within any new buildings proposed to contain noise sensitive activities, or where existing buildings are to be re-used for new noise sensitive activities .

Recommendations for the Hutt City Proposed District Plan below to manage reverse sensitivity noise effects of the state highway and rail corridor are set out below in Section 11. The recommendations to address potential reverse sensitivity effects are based on rail and road traffic noise readings recently measured in the district. Recommendations regarding setback distances and areas where acoustic insulation is required for new or altered buildings housing noise sensitive activities (sections 11.9.1 "Noise From Existing roads" and 11.10 "Noise From Rail Corridor") include expectations of future increased noise within these corridors.

¹⁹ *Guide to the management of effects on noise sensitive land use near to the state highway network*. NZ Transport Agency Waka Kotahi . Published September 2015

²⁰ <http://www.huttcity.govt.nz/district-plan-change-39>.

Recommendations

- We recommend the proposed District Plan contain strong provisions that protect operators of the roading network and operators of the rail network due to potential adverse noise and vibration effects.
- We recommend this be achieved by requiring acoustic insulation of sensitive rooms in buildings located in corridors lying within proximal distance to the road or rail network and by non-acoustic methods including limitations on subdivision and development of land.
- We recommended the Hutt City District Plan use a single, technically appropriate acoustic insulation standard at all instances where this mitigation measure is stipulated in the plan.

11 Recommendations

This section sets out generic recommendations at ensuring the proposed District Plan noise provisions are in line with the current best practice. The focus is on noise rules being standardised within each zone, and providing noise provisions that are easy to interpret and implement for both Council and other users of the District Plan.

The recommendations are generic. We have not set out the final wording of the recommended noise rules at this stage. The recommendations below do not significantly depart from the overall approach of existing policies and rules, with recommendations based on conformance with the National Planning Standard whilst including technical enhancements based on the most appropriate national noise standards and best practice.

The recommendations below focus primarily on managing noise and vibration effect of activities to protect the health and safety of people and communities, and to effectively manage the potential for reverse sensitivity noise and vibration effects created by inappropriate development of adjoining land.

11.1 New Zealand Standards and Related Noise Metrics

The recommendation is to place the most recent measurement and assessment Standards at the heart of the Proposed District Plan noise provisions – this is the 2008 versions of Standards NZS6801:2008 and NZS6802:2008. These standards are viewed as technically superior and robust being based on methods and procedures adopted internationally for noise measurement and assessment. NZS 6801 describes procedures for the consistent measurement of sound. This states that the methods and procedures for sound measurement are intended to be applicable to all forms of environmental sound, individually or in combination.

NZS6802 sets out procedures for the consistent assessment of noise, for example, when assessing compliance with stated noise limits. This standard is not intended to be applied for assessing noise within the scope of other NZ acoustic standards. In particular assessment of specific sources of sound including road or rail transport, flight operations of fixed or rotary winged aircraft associated with airports or helicopter landing areas, construction, port noise, wind turbine generators, and impulsive sound (such as gunfire and blasting), requires special techniques that generally are outside the scope of NZS6802:2008. Thus, separate recommendations are set out below for managing the environmental effects of these types of noise.

Recommendation:

Adopt NZS 6801:2008 *Acoustics –Measurement of Environmental Sound*

Adopt NZS 6802:2008 *Acoustics –Environmental Noise*

Remove any reference to superseded standards [including]:

NZS 6801:1991 *Measurement of Environmental Noise*

NZS 6802:1991 *Assessment of Environmental Noise*

New Zealand Standard 6801:1999 *Acoustics - Measurement of Environmental Sound*

11.2 Recommendations For Activity Zones

New Zealand Standard NZS6802:2008 provides guidance on levels of outdoor environmental noise adequate to protect health for use in protecting noise sensitive sites from the adverse effects of environmental noise.

Recommended noise limits are provided in NZS6802:2008 as guideline residential upper noise limit values (L_{AFmax} and L_{Aeq}) to provide “reasonable” protection of health and amenity. A note of caution is signalled within NZS6802:2008 against setting low noise limits within existing modest or high ambient sound levels (compliance with which cannot be properly measured) [refer NZS6802:2008 clause 8.6.3].

The 2008 version of the standard introduced an evening assessment time frame with limits applicable to this evening period set between the day and night limits. This has emerged as best practice in NZ, ensuring the decibel limit recognises the likely ambient sound climate in residential areas over the evening period. The following is an extract of the general guidance provided by NZS6802:2008 on setting noise limits for residential areas (ref. Section 6 of NZS6802:2008);

8.6.2 *As a guideline for the reasonable protection of health and amenity associated with use of land for residential purposes, the noise limits in table 3 should generally not be exceeded at any point within the boundary of a residential site, for example, at any point within the notional boundary of a rural dwelling.*

Guideline residential upper noise limits

Daytime(1)	55 dB LAeq(15 min)
Evening(1,2)	50 dB LAeq(15 min)
Night-time(1)	45 dB LAeq(15 min)
Night-time(1)	75 dB LAFmax

NOTE–

- (1) *The definition of times of day are a matter for the relevant local authority and should recognise that a period of not less than 8 hours needs to be provided for sleep to ensure at least the minimum acceptable degree of health protection.*
- (2) *Inclusion of an evening period and its hours of application are a matter for the relevant local authority.*
- (3) *This clause is not framed as a consent condition, rule or national environmental standard and should not be quoted for those purposes.*

Thus, for the protection of residential sites within residential zones (and other sensitive sites) the general approach in New Zealand is to set limits on noise received during daytime at 50 to 55 dB $L_{Aeq[15 min]}$ with night time and evening limits set to between 40 to 50 dB $L_{Aeq[15 min]}$. In addition, between 10pm and 7am it is recommended single event noise at sensitive sites be controlled to 70 to 75 dB L_{AFmax} .

Apart explicitly stating noise limits, noise rules need to include suitable reference to NZS 6801:2008 *Acoustics – Measurement of Environmental Sound* and NZS 6802:2008 *Acoustics –Environmental Noise* as these are the environmental noise standards necessary to ensure noise rules remain objective, repeatable and can be enforced when necessary.

We have made no specific recommendation for noise limits within each zone at this stage. Instead we make the following generic recommendation regarding wording of noise rules applying to permitted activities in each zone;

Recommendation:

The **Noise Emission Level** from any site shall not exceed the following levels when measured at any point within any residential site or at any point within the notional boundary of any residential unit or other building used for a noise sensitive activity located within a site in the Rural zone, other than any such building located on the same site, during the following time frames:

- 7am to 7pm.....w dB LAeq (15 min)
- 7pm to 10pm.....u dB LAeq (15 min)
- 10pm to 7am the following day.....y dB LAeq (15 min)
- 10pm to 7am the following day.....z dB LAFmax

‘u’, ‘w’, ‘x’, ‘y’, and ‘z’ are the numerical noise limits to be informed by the Operative plan LA10 and LAMax limits, in addition to a consideration of the policies and outcomes sought within the Proposed District Plan.

It is common practice to provide exemptions from district plan noise rules for certain types of noise sources which are either beyond the jurisdiction of a district plan (e.g. noise from rail or road vehicles travelling within defined (designated) transport corridors) or where it may be unreasonable to apply numerical noise limits (such as noise generated by normal residential activities such as mowing lawns or children playing outdoors). Noise arising from items of fixed plant operating on residential sites are generally not excluded from district plan control as it is feasible and practical for these sources to be designed, located or physically mitigated so that the noise effects can be controlled to acceptable levels. In addition, noise effects due to sports are usually temporary in nature and are a normal part of urban sound environment. The exemption would not be reasonable however to apply to events involving the use of amplified sound systems, motor vehicles, powered machinery, amplified music, or the use of firearms or explosives as these types of sound sources need to be controlled to reasonable levels to protect sensitive environments. Due to their function, it is not considered practical to require warning devices such as security alarms or fire station sirens to comply with district plan noise limits.

Finally, as compliance with district plan noise limits is based on assessment using NZS6802:2008 it is also not appropriate to apply this Standard to noise sources beyond the scope of this Standard. Section 1.2 of NZS6802:2008 refers to the scope of this this Standard and states it cannot be applied to the assessment of sound where the source is within the scope of, and subject to, the application of other New Zealand acoustical Standards. In particular, assessment of specific sources of sound including road or rail transport, flight operations of fixed or rotary winged aircraft associated with airports or helicopter landing areas, construction, port noise, wind turbine generators, and impulsive sound (such as gunfire and blasting), requires special techniques that generally are outside the scope of this Standard.

Recommendation:

The “Definitions” section of the Proposed District Plan should define **Noise Emission Level** as meaning:

Noise Emission Level means a sound level measured in accordance with NZS 6801:2008 *Acoustics – Measurement of environmental sound* and assessed in accordance with the provisions of NZS 6802:2008 *Acoustics – Environmental noise* excluding;

1. Noise generated as part of normal residential activities, apart from noise arising from items of fixed plant.
2. Sports events not involving the use of amplified sound systems, motor vehicles, powered machinery, amplified music, use of firearms or explosives.
3. Vehicles operating on public roads or trains on rail lines (including at railway yards, railway sidings or stations and level crossing warning devices).
4. Any warning device used by emergency services for emergency purposes.
5. Any noise source identified in Section 1.2 of NZS6802:2008 as outside the scope of that Standard which includes;
 - Aircraft noise

- Noise associated with port activities outside the district boundary
- Noise from helicopters in the vicinity of a helicopter landing area
- Construction noise
- Wind turbine noise except noise due to small scale domestic wind turbines.

11.3 Two Teir Night Time LAeq(15 min) Limits For Residential Sites

The 2021 ambient noise survey reveals that night time noise levels at sites in the vicinity of the Wairarapa Railway corridor or arterial or regional roads measured at higher levels than readings taken at more distant sites. Elevated levels of ambient sound present in an area will affect the 'intrusiveness' of new noise or noise being complained of. In addition, elevated levels of ambient sound will affect the ease with which noise readings taken outdoors to confirm compliance with stated night time noise limits.

In response to these two artefacts of elevated ambient noise typically found within 50 metres of any arterial route or regional road, it is recommended that where a night time noise limit of LAeq(15 min) 40 dB apply to noise received at any residential site (or at any point within the notional boundary of any residential unit or other building used for a noise sensitive activity located within a site in the Rural zone, other than any building located on the same site) the compliance limit be raised to 45 dB LAeq(15 min). A night time limit of 45 dB remains within available guidelines regarding limits on outdoor noise levels requisite to protect health and amenity at residential sites, but within sites experiencing night time noise from roads would be more reasonable and practical to enforce compared to 40 dB LAeq(15 min). A similar recommendation for night time noise limits applying within residential areas adjacent to the Wairarapa Railway line which passes though the Hutt district is not recommend owing to the relatively few trains using the line between 10pm and 7am (and hence lack of elevated night time noise in these areas).

Recommendation:

In consideration of the policies and outcomes sought within the Proposed District Plan it is recommended night time (10pm to 7am) noise emission limits applying to noise from land use activities received within any residential site (or at any point within the notional boundary of any residential unit or other building used for a noise sensitive activity located within a site in the Rural zone, other than any such building located on the same site) are recommended to be set at **40 dB LAeq(15 min)** unless the residential noise assessment position is located not less than 50 metres from any arterial route or regional road in which case the recommended night time noise limit should be **45 dB LAeq(15 min)**.

11.4 Noise From Fixed Plant

"Fixed Plant" is defined as equipment such as heat pumps, air handling systems, water pumps which are common sources of ambient sound, particularly in urban area. Being fixed noise sources, these sources of sound are amenable to being appropriately located, enclosed or otherwise treated to achieve a higher standard of noise control compared to mobile sound sources (e.g. delivery vehicles on site).

Mobile sound sources operating on a site naturally have lesser ability to accommodate noise control measures but are nonetheless required to achieve compliance with slightly higher noise limits (unless exempted under the rules).

The recommendation is for the proposed District Plan to regulate noise emissions from fixed plant located in residential and commercial/business areas as follows;

Recommendation

Within all mixed use, commercial, industrial and business zones, night time LAeq(15 min) performance standards for noise due to "Fixed Plant" received within any residentially zoned site should be set at a limit 5 dB below the night time limit applying to all other sources (but not less than 40 dB LAeq(15 min)); and

Within Residential Activity Areas, avoid rules that place any limits on noise generated as part of normal residential

activities, however the applicable rules should impose a limit for noise from fixed plant at levels not more than 40 dB LAeq(15 min) when measured within any other residential site.

11.5 Acoustic Insulation Of Habitable Spaces

New or altered habitable rooms accommodating Noise Sensitivity Activities located within most busy urban centres or within commercial areas or within areas affected by noise from existing roads or rail lines in New Zealand are required by the relevant District Plan provisions to be acoustically insulated.

Because the effective reduction of sound within habitable rooms relies on keeping windows closed, there is also a requirement for ventilation to be provided so that the minimum requirements of the Building Code (G4) for natural ventilation are achieved.

As discussed in Section 10.11.2 above, the recommendation is to unify the type of district plan methods currently adopted for specifying acoustic insulation – currently there is the ‘indoor sound level’ approach of Chapter 14A Standard 6 and the ‘standardised level difference’ method (Dtr,2m, nTw) of Chapter 5. As above, the recommendation is to adopt only the Dtr,2m, nTw method due to the advantages in ease of design, verifying and checking compliance that of this type of insulation rule.

Based on best practice (and the approach of the operative Plan) it is recommended TWO possible pathways be offered within the proposed Plan for achieving compliance, as follows;

- a) Use of a “Minimum Construction Schedule” as a default minimum construction that, if followed, would result in the habitable room receiving the requisite minimum level of acoustic insulation (e.g. Dtr,2m, nTw > 30). If necessary, conformance with this schedule can be verified when building plans are submitted to Council for building consent; OR
- b) An expert report is submitted to Council in the form of an acoustic design certificate signed by a suitably qualified acoustic engineer stating the design of the habitable room as proposed will achieve compliance with the stated performance standard.

This the current approach of the operative District Plan in relation to;

- Insulation requirements of Chapter 5 Commercial Activity Area Rule 5A 2.2.2 (b) and Rule 5B 2.2.1.1 (g) which specifies minimum construction standards in “Appendix Central Commercial 7 – Noise insulation Construction Schedule”
- Insulation requirements of Chapter 14A Transportation – Standard 6 which specifies compliance with “Appendix Transport 4 - Noise and Vibration Construction Schedule”.

This ‘two option’ method for achieving compliance with district plan acoustic insulation requirements is recommended to be continued as it allows for buildings of simple design, using common materials, to be easily assessed as meeting the necessary acoustic insulation standard.

Acoustic insulation rules for habitable rooms are almost always accompanied by a companion ventilation requirement, it being necessary to keep windows closed to enjoy the benefits of an acoustically insulated habitable room. It is worth noting that the ventilation standard accompanying the Chapter 5 insulation requirement is based on (a) Ventilation is only being required in bedrooms, not other types of habitable rooms (b) the supplementary source of air is to achieve a minimum of 7.5 litres per second per person. This contrasts with the insulation requirements of Chapter 14A – Appendix Standard 6 which requires (a) ventilation to be provided to ALL qualifying habitable rooms and (b) the amount of ventilation must fully meet clause G4 of the Building Code (Schedule 1 of the Building Regulations 1992) which requires a considerable sized ventilation system. Given that habitable rooms required to be acoustically insulated are mostly fitted with openable windows sufficient to ventilate the room to G4 standards, it seems inefficient to require artificial ventilation to achieve the high flow volume ventilation requirements of G4. It is considered that, on balance, the purpose and principles of the RMA may be achieved more efficiently within the proposed District Plan by adopting the requirements for ventilation from the Chapter 5 requirements of the operative District Plan (ventilation provided to bedrooms only, at a minimum flow rate of 7.5 litres per second per person).

The sound experienced within the habitable room due to the operation of the ventilation system is a matter

referred to in the Standard 6 ventilation requirements but not the Chapter 5 ventilation requirements. These rules state sound due to operation of the ventilation system must not exceed 30dB LAeq(30s) when measured 1m away from any internal grille or diffuser. This requirement for low-noise ventilation into habitable rooms is supported on an effects basis and is recommended to be incorporated into the proposed District Plan.

Recommendation:

To unify methods to specify acoustic insulation in the district plan. Adopt only the Dtr,2m, nTw method due to the advantages in ease of design, verifying and checking compliance that of this type of insulation rule.

Require the rules to provide TWO options for demonstrating compliance with the Dtr,2m, nTw > 30 requirement, this being either;

- a) An acoustic design certificate signed by a suitably qualified acoustic engineer stating that the design as proposed will achieve compliance with the minimum performance standard: or
- b) Compliance is demonstrated within the plans submitted for building consent indicating habitable rooms are designed and constructed in a manner that accords with the following **minimum schedule of building construction**.

Insulation requirements should be accompanied by a companion ventilation requirement so that openable windows are not needed to be used for thermal comfort reasons. It is recommended that ventilation be required in the form of a positive supplementary source of fresh air ducted from outside for any bedroom or any room intended to be used for sleeping. The supplementary source of air is to achieve a minimum of 7.5 litres per second per person. Sound due to operation of the ventilation system must not exceed 30dB LAeq(30s) when measured 1m away from any internal grille or diffuser.

11.6 Construction Noise

Chapter 14C of the district plan at standard 2.1(f) which states all construction, demolition, and maintenance work shall comply with NZS 6803P *Measurement and Assessment of Noise from Construction, Maintenance and Demolition Work*.

NZS 6803:1999 *Acoustics – Construction Noise* is the current and most technically appropriate standard for construction noise assessment. This standard uses LAeq noise descriptors. The scope of NZS 6803 does not apply to vibration or blasting, noise induced hearing loss, or effects of noise upon wildlife, stock, or domestic animals. NZS 6803 also does not apply to 'emergency works' as defined in the Resource Management Act 1991.

Recommendation:

Adopt NZS 6803:1999 *Acoustics – Construction Noise* for the assessment of construction noise
Remove any reference to superseded standards New Zealand Standard 6803 P:1984 *The Measurement and Assessment of Noise from Construction, Maintenance and Demolition Work*.

11.7 Vibration

It is noted that the RMA defines noise as including vibration. Vibration effects are controlled in the operative District Plan using rules such as Rule 4A 4.1.10(a) for Residential Activity Areas which requires activities that cause vibration are permitted activities provided "*the activity is managed and controlled in such a way that no vibration from the activity is discernible beyond the boundary of the site*". An accompanying rule states that activities that do not meet the above permitted development standard are restricted discretionary activities with discretion restricted to "effects on the amenity of the surrounding area". This approach is also taken within permitted activity standards applying in Chapter 6 (Business), Chapter 8 (Rural) and Chapter 9 (Community Health).

The National Planning Standards does not require numerical vibration limits to be stated in district plans. The NZPS only refers to managing damage to structures from construction vibration. No other vibration sources are covered. The NZPS states that if rules of this nature are to be included in district plans, rules must be consistent with the metrics for peak particle velocity (ppv) in ISO-4866:2010 – *Mechanical vibration and shock*.

It is noted there are no relevant NZ Standards setting out suitable vibration criteria or measurement or compliance assessment methods for assessing ground vibration as an environmental effect.

On the basis of the above, the recommendation for the proposed District Plan is to continue to adopt policies and rules around limiting discernible vibration occurring on adjacent sites. This is considered consistent with the NZPS and would address concerns that applying numerical limits on vibration within permitted activity site standards would place a duty on Council to monitor vibration levels at receiver sites to determine compliance – a highly specialised and technically challenging procedure.

Recommendation:

Rules to address vibration effects should continue to be based around “that no vibration from the activity is discernible beyond the boundary of the site”. Consideration should be given to confining the scope of any such rules to vibration received within any residential site (or at any point within the notional boundary of any residential unit or other building used for a noise sensitive activity located within a site in the Rural zone, other than any such building located on the same site). This would be more consistent with the approach taken to managing the effects of noise in sensitive areas.

Road and Rail Vibration Reverse Sensitivity Measures:

Effective control of vibration effects can only sensibly be carried out by addressing the vibration at source.

Chapter 14A – Standard 6 sets out to manage reverse sensitivity vibration effects based around requiring the owner of new buildings establishing within road or rail buffer areas to design and construction any buildings housing sensitive activities to comply with class C of Norwegian Standard 8176 E:2005 (*Vibration and Shock - Measurement of Vibration in Buildings from Land based Transport and Guidance to Evaluation of Its Effect on Human Beings*). We do not recommend adopting reverse sensitivity vibration rule because;

- It is not feasible to design buildings to reduce vibration from road or rail sources.
- The Norwegian Standard referred to is intended to be used as a means of assessing vibration performance of new roads, not as a reverse sensitivity measure.

Should there be evidence of adverse vibration effects which require the building to mitigate the effect, we consider the purpose and principles of the RMA are better met by control at source in accordance with s.16 RMA whether or not the design of the proposed building would play a role in transmitting or amplifying ground vibrations. We recommend the reverse sensitivity effects of road or rail vibration be dealt with via the use of setbacks for new or altered buildings housing sensitive activities

11.8 Noise from Temporary Military Training

The nature and diversity of military training exercises mean these activities will not always be able to comply with noise limits for permitted activities set out in the District Plan. These activities are usually short lived on any site. Although the organisers of temporary military training (NZ Defence) need to make the case concerning benefits of allowing activities in the Hutt district that would temporarily breach the noise rules, these activities are exempted in NZ many district plans from complying with the normally applied district plan noise emission limits.

A simple approach is to exempt the noise generated by temporary military training where this takes place on a site for 72 hours or less. Noise effects over such constrained time periods are not likely to give rise to serious adverse effects, although annoyance and complaints may arise.

An alternative approach would be to exempt noise generated by temporary military training where the noise arises from sites suitably remote from sensitive sites. It is believed NZ Defence are developing draft rules based on setback distances sufficient to ensure noise effects are reduced to negligible levels at sensitive receiver sites.

Recommendation:

Adopt a flexible approach to controlling noise generated by temporary military training by either ;

1. Noise from military training activities conducted on any site for not more than 72 hours within any six month

period are exempt from the permitted activity noise standards for each zone. Military training activities taking place on any site for longer time periods are required to comply with District Plan requirements for temporary activities; OR

2. Consider rules that permit noise generated by temporary military training where this noise is generated on sites sufficiently remote from sensitive receiver sites to ensure negligible effects on people and communities.

11.9 Traffic Noise

The operative District Plan focuses on ensuring the efficiency and safety of the transportation system. Rules in this section set out standards for parking, manoeuvring and loading vehicles, and for vehicle access. In addition, rules in the Transport chapter (14A) include “Standard 6 - Development within the State Highway and Railway Corridor Buffer Overlays” to manage potential reverse sensitivity effects from sensitive activities establishing near to the state highway or railway corridors. The district plan does not appear to place any requirements on road controlling authorities to assess or control noise from new or altered roads.

Noise from the existing network is best addressed as a Reverse Sensitivity issue within the District Plan, whereas noise from new or altered roads may be addressed using a relevant NZ Standard.

11.9.1 Noise From Existing roads


The operative plan sets out at Standard 6 of Chapter 14A methods to manage noise from the state highway which seeks to balance providing for a safe and efficient roading highway network with the need to provide for a reasonable quality of life and amenity values where noise sensitive land use activities establish near the highway.

Standard 6 requires that all new buildings containing noise sensitive activities, or existing buildings with new noise sensitive activities located within the 40-metre wide state highway ‘Buffer Overlay’ must be designed, constructed and maintained so that traffic noise within habitable rooms does not exceed 45dB LAeq(24h).

APPENDIX C (attached) sets out the results of 24 hour measurements taken at four sites as part of the RiverLink Project. These results have been made available to this review. Daily measured LAeq(24 hour) results are summarised for each site as follows;


17 Tirohanga Road

40 metres From State Highway 2 (100 km/hr) **57 dB LAeq(24h)**

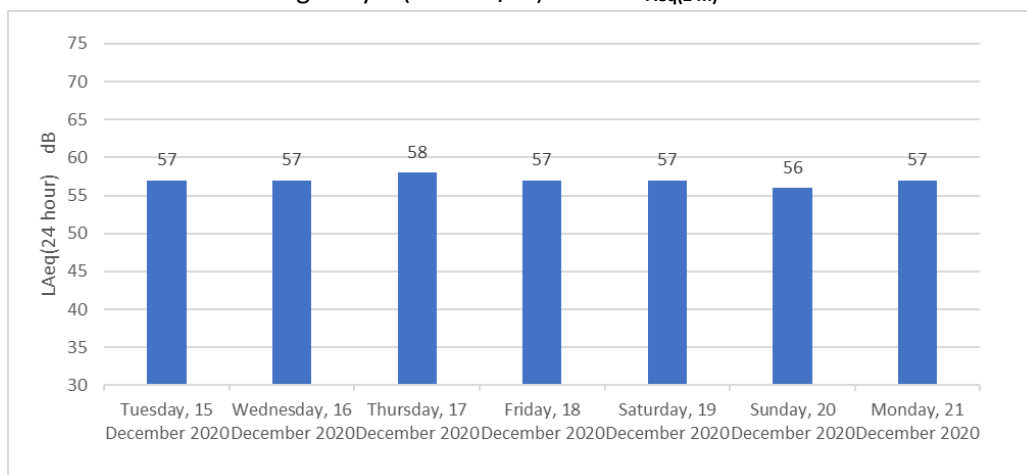


7 Harbour View Road

75 metres from State Highway 2 (100 km/hr) **61 dB L_{Aeq}(24h)**

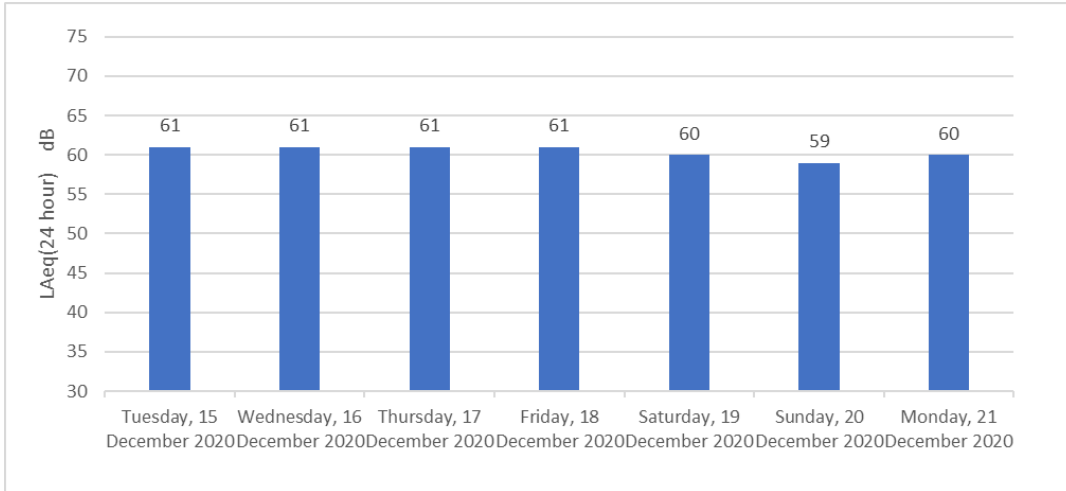


28 Rutherford Street

2 metres from Arterial Road **66 dB L_{Aeq}(24h)**

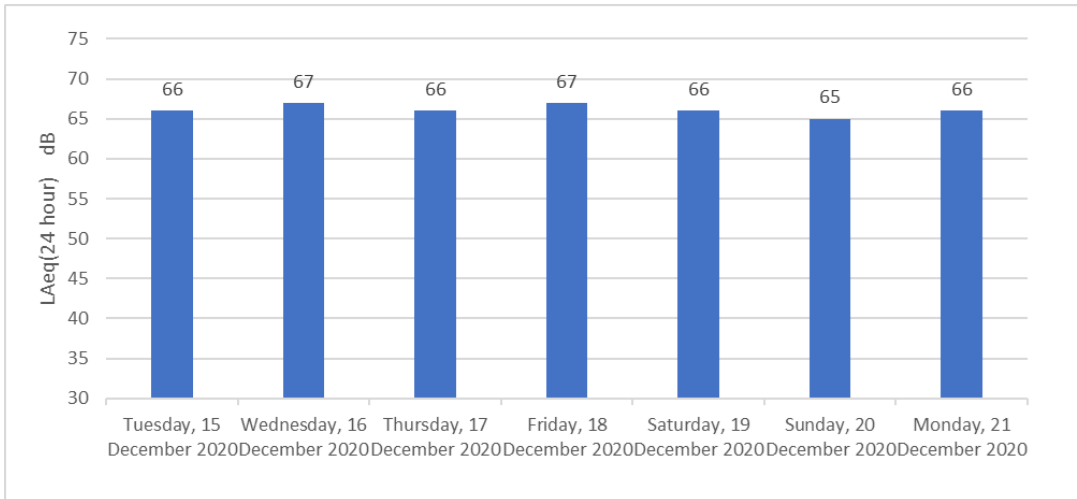

2 Pomare Road

30 metres from State Highway **70 dB L_{Aeq}(24h)**

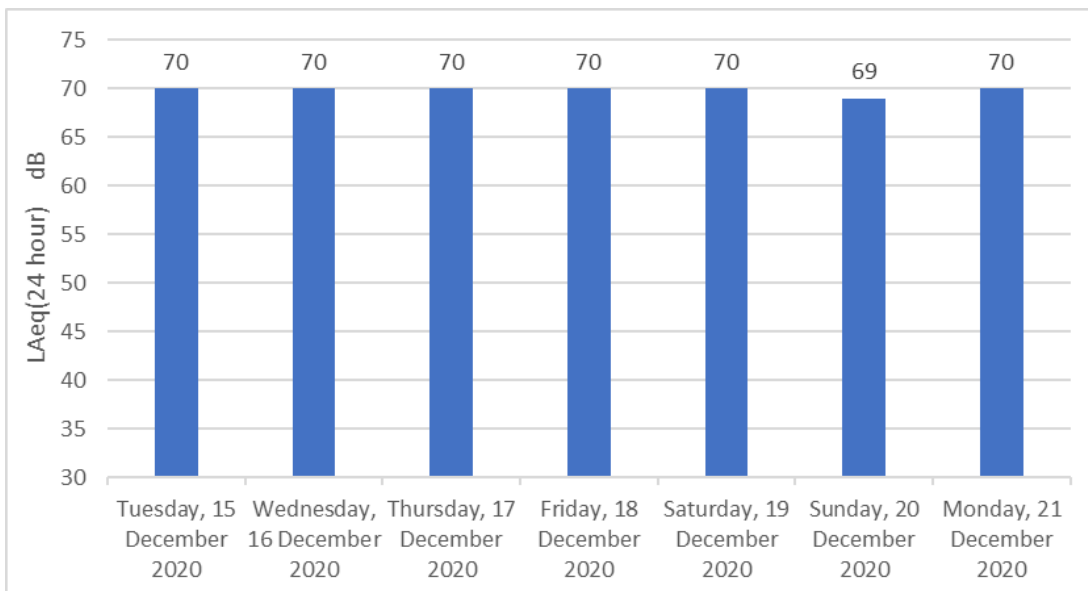

The above results are summarised in the following table;

Address	Measured LAeq(24hr) dB	Location of Microphone	Shielded?	Barrier Effect (dB)	"True" Traffic Noise Level LAeq(24hr)
2 Pomare Road	70	38 metres From State Highway 2 (100 km/hr)	N	-	70
28 Rutherford Street	66	2 m from an arterial road (50 km/hr)	N	-	66
17 Tirohanga Road	57	40 metres From State Highway 2 (100 km/hr)	Y	10	67
7 Harbour View Road	61	3 metres to local street (50 km/hr) & 75 metres from State Highway 2 (100 km/hr)	Y	5	66

We have examined these traffic noise levels recently measured in the Hutt district. We have excluded the results measured at Harbourview Road as these noise levels were due to both traffic on a local street as well as the distant state highway. The remainder of the results indicate traffic noise levels measured within 40 metres of SH2 measure at or below 70 dB LAeq(24 hr).

Based on outdoor traffic noise levels measuring up to 70 dB LAeq(24 hr) within 40 metres of the state highway, the application of the proposal to insulate habitable rooms within the noise corridor to a achieve Dtr,2m, nTw >30 dB would result in an internal noise level of LAeq(24 hr) 40 dB. This is an acceptable indoor noise standard as, due to diurnal distribution of traffic flow, noise levels during the critical time period would measure 10 dB below the 24 hour average (i.e. 30 dB). It is noted that this outcome would be a 5 dB improvement compared to the 45 dBA indoor noise standard stipulated for habitable rooms located within the 40-metre wide State Highway and Railway Corridor Buffer Overlay under Chapter 14C – Appendix Standard 6.

Recommendation;

It is recommended that the proposed District Plan require any new or altered habitable room within buildings housing *Noise Sensitive Activities* that lie within 40 metres of a state highway designation boundary be insulated as per the recommendations of Section 11.5 above (achieve a minimum External Sound Insulation Level of the building envelope of Dtr,2m, nTw >30 dB) with an accompanying requirement for fresh air ventilation to be provided into the room. Certain exemptions to this requirement can justified as follows;

- a. Where acoustic screening (such as provided by a solid barrier or fence) is present so that noise levels at the location of the building do not exceed LAeq(24 hour) 55 dB (measured outdoors) when assessed in accordance with NZS6806:2010. Council shall be provided with an acoustic design report by an appropriately experienced and qualified expert confirming this.
- b. Where habitable rooms located further than 40 metres from the edge of the highway designation.

11.9.2 Noise From New & Altered Roads

We recommend implementing NZS 6806:2010 *Acoustics - Traffic Noise – Noise From New or Altered Roads* to manage traffic noise from new and altered roads. The Standard provides guidance and consistency on methods and criteria to measure, assess, and control the effects of noise from new or altered roads. The standard only applies to new and altered roads of scale such as state highways and are not recommended in the Standard to apply to low volume roads.

This Standard does not address noise from existing roads except in relation to situations where new or altered roading projects interact with existing roads

NZS 6806:2010 is recommended as it provides a framework for assessing when noise from new or altered roads should be mitigated, based on taking into account health issues associated with noise, the effects of noise on people and communities, and the potential benefits of new and altered roads to people and communities. NZS6806 is identified in the NZPS as the appropriate Standard for the assessment of noise from ‘new or altered roads’

Recommendation:

Adopt *New Zealand Standard NZS6806:2010* for addressing noise from new and altered roads.

11.10 Noise From Rail Corridor

The Wairarapa Railway Line is a secondary railway line connecting Wellington with the Wairarapa district. The line ends at Woodville where it joins the Palmerston North - Gisborne Line.

The Wairarapa Line is a crucial part of the national rail network. There are possible reverse sensitivity issues regarding noise from rail traffic on the Wairarapa Line. It is important that the revised Plan recognise the importance of this key transport resource and ensure that its operation is not compromised through noise sensitive activities establishing in areas affected by high levels of rail noise.

Daily rail noise levels have also been recently measured at 3 sites in residential areas as part of the 2021 Ambient Noise Survey indicate moderate levels of noise measuring between LAeq(24 hr) 50 and 60 dB are experienced in residential areas alongside the Wairarapa Rail Line. Based on outdoor rail noise levels, it is recommended to require new or altered habitable rooms to be insulated within 40 metres of the rail corridor so that indoor sound levels in new habitable rooms are reduced by at least 30 dB (Dtr,2m, nTw > 30 dB), this is calculated to result in indoor rail noise levels of between LAeq(24 hr) 22 to 30 dB within treated rooms which is an acceptable level of indoor noise from rail transport.

The recommendation for the revised District Plan is to adopt an approach based on continuing the approach of operative District Plan for dealing with reverse sensitivity effects of rail noise.

Recommendation;

We recommend rules be developed that apply to new developments and new or altered habitable rooms within 40 metres of the Melling or Wairarapa rail corridor that require:

1. New or altered buildings housing noise sensitive activities shall achieve a minimum External Sound Insulation Level of Dtr,2m, nTw >30 dB of any habitable room within a building housing a Noise Sensitive activity.
2. An accompanying rule should be developed requiring fresh air ventilation be provided in the form of a positive supplementary source of fresh air ducted from outside for any bedroom or any room intended to be used for sleeping. The supplementary source of air should achieve a flow rate of a minimum of 7.5 litres per second per person based on normal room occupancy. The rule should stipulate sound due to operation of the ventilation system is not exceed 30dB LAeq(30s) when measured 1m away from any internal grille or diffuser.
3. The rule should be worded so that these requirements do not apply:
 - a. Where an effective acoustic screen (such as a solid noise barrier fence) is in place so that noise levels at the location of the location of the new dwelling or building does not exceed LAeq(24 hour) 55 dB outdoors. In this case it would be appropriate for the rule to state that Council should be provided with an acoustic design report by an appropriately experienced and qualified expert to confirm this.
 - b. For habitable rooms located further than 40 metres from the edge of the designation boundary or where the rail line does not yet exist.

11.11 Helicopter Landing Areas

NZS 6807:1994 *Helicopter Noise Management & Land Use Planning* provides guidance on control of noise from helicopter landing areas by way of Resource Consent or rules in District Plans under the RMA. The approach of NZS 6807:1994 is to assess helicopter noise on a 24 hour basis [using L_{dn}] with a separate consideration of the maximum levels due to any night time operations [using L_{AFmax}]. The standard allows for a relaxation of the limits by 5 dB where background sound levels [L₉₅ under this standard] exceed threshold levels set in the standard, hence if this criteria is met a limit of 50 dB L_{dn} would be permitted to be relaxed by +5dB and becomes 55 dB L_{dn}.

NZS6807:1994 is recommended to be adopted within the revised plan as this Standard represents best practice for the control of noise from helicopter landing areas. NZPS recommends where this Standard is referred to within district plans for the control of noise from helicopter landing areas, the reference to this Standard exclude reference to section 4.3 (Averaging) of the Standard. With this proviso, NZS6807 is considered the most technically appropriate standard for the assessment of noise from helicopter landing areas affecting sites on which noise sensitive activities are established.

Recommendation:

In rural areas, establishing helicopter landing areas can lead to rural efficiencies and safety benefits. For non-noise reasons, it may be appropriate to provide at some level for helicopter landing areas in the rural zone, however that question is beyond the scope of this review.

If helicopter noise provisions are included in the proposed District Plan they should refer to NZS 6807:1994 *Helicopter Noise Management & Land Use Planning*. It may be appropriate to provide for landing sites as controlled activities provided they are able to demonstrate compliance with, and will be controlled to comply with, the noise criteria set out within NZS 6807:1994 which are considered reasonable and workable.

Any rules referring to the use of NZS 6807:1994 *Helicopter Noise Management & Land Use Planning* should specifically make reference to excluding the provisions of Clause 4.3 Averaging.

11.12 Wind Farm Noise

NZS 6808:2010 Acoustics Wind Farm Noise was developed specifically for the measurement and assessment of sound from wind turbine generators and wind farms in New Zealand conditions. NZS 6808 provides details on prediction, measurement and assessment with the stated purpose being to aid both wind farm development and Local Authority planning procedures by providing a suitable method for the measurement and assessment of sound from wind turbine generators.

The standard includes Wind Turbine Generators located on land or sea [both horizontal and vertical]. The standard does not cover small wind turbines less than this size as these are covered under NZS 6801 and NZS 6802.

NZS6808 is the most current and technically appropriate standard for the assessment of wind turbine generator and wind farm noise. The use of this Standard is consistent with the NZPS where district plan set out to manage the noise effects of wind turbine or wind farms. It should be noted, this Standard would not be appropriate to apply to noise from small scale domestic turbines. Small scale domestic installations fall within the scope of NZS 6801 and NZS 6802.

Recommendation:

Adopt reference to NZS 6808:2010 *Acoustics – Wind Farm Noise*

11.13 Temporary Events Noise

Temporary activities or events frequently occur within public open space [reserves], road reserves, and at community facilities such as churches, schools, or community halls. Examples include competitions, festivals, galas, carnivals, market days, entertainment events, promotional events, and other events of similar nature. These events are open to the public to attend.

In some cases, these events may have effects on the surrounding environment such as noise, light, structures, parking, road closures, and may last for more than one day. Temporary activities or events may require the construction of structures to facilitate the activities which may have effects on the amenity values of the surrounding environment.

The operative District Plan deals with noise from “temporary activities” in Rule 14J 2.1.1 “Permitted Activities - Conditions for temporary activities in all activity areas” and requires that a noise limit of LA10 70 dB be complied with “within any other site in a Residential Activity Area and at any point within the notional boundary of any

dwelling in a Rural Activity Area” as well as at the boundary of any Commercial or Business Activity Area site other than the site of the temporary activity.

We recommend this type of reasonably liberal approach be taken to controlling temporary noise effects of Temporary Activities on the basis that the community can generally tolerate elevated noise levels. A key proviso is to limit the extent of noise from temporary activities during the more sensitive night time period from 10pm through the 7am.

Recommendation:

It is recommended a permitted activity standard apply to Temporary Events that allows elevated noise to occur for limited daytime, perhaps similar to the existing operative Plan provisions of noise from “temporary activities” in Rule 14J 2.1.1 but adapted to use the LAeq noise unit and refer to the 2008 versions of NZS6801 and NZS6802.

11.14 Telecommunications Equipment

Telecommunications systems consist of a core network for carrying signals between locations, and access networks linking the core to individual users and customers. As noted above a National Environmental Standard [NES] has been approved by the government to assist in the implementation of its telecommunication objectives. The NES includes controls over noise from telecommunications cabinets located in road reserves. This NES has been recommended to be included within the revised District Plan to ensure consistent standards are applied to these fixtures. Pursuant to s43B of the Resource Management Act 1991, no rule or resource consent shall be more stringent than the national environmental standards for telecommunications facilities.

It is mandatory to adopt the form of the noise rule consistent with the NES for telecommunications equipment within the proposed District Plan.

Recommendation:

Noise from telecommunications cabinets located in road reserves shall be a permitted activity provided that the noise emission levels comply with Clause 9 of the Resource Management [National Environmental Standards for Telecommunication Facilities] Regulations 2008.

12 Summary

The existing noise provisions of the operative Hutt City District Plan have been reviewed in light of the relevant noise Standards, published reports and based ambient sound level readings taken in the district in recent times. The aim has been to revise the existing District Plan noise provisions in a manner that supports rather than undermines the District’s social, economic and environmental vision, and to enhance long term sustainability.

The key enhancements are the adoption of the more recent New Zealand Standards and enhancement of the existing District Plan noise provisions to cover the following additional matters;

- Clarify the definition of “Noise Sensitive Activities” to encompass a wider range of activities that are sensitive to the effects of noise.
- Standardise and where practical, simplify the specification of acoustic insulation of new or altered habitable rooms housing noise sensitive activities. In particular, unify wording of rules requiring acoustic insulation of habitable rooms in areas moderately to highly affected by noise due to transportation sources and/or land use activities.
- Improving acoustic insulation provisions within areas currently defined within *State Highway and Railway Corridor Buffer Overlays*.
- Enhance policies and rules around using ‘discernible vibration’ as a means of controlling potential effects

occurring on adjacent sites.

- Incorporating methods to deal with noise from new or altered roads, wind farms, helicopter landing areas
- Update the rules applying to noise from Temporary Events
- Ensure the NPS Standards for noise are complied with, including NZ Standards referenced and definitions employed in the proposed District Plan.
- Add noise controls for Telecommunications Equipment as required by statute.

Implementing the above recommendations within provisions of the proposed District Plan will enhance the protection of the environmental, social, economic and cultural wellbeing of present and future generations living in Lower Hutt.



Malcolm Hunt

B.Sc., M.Eng(mech)

RSH Dip. Public Health, RSH Dip. Noise Control


APPENDIX A

2021 Ambient Noise Survey

Site Readings and Summary Results

Site Number: 1 93 Eastern Hutt Road, Taita


General Business

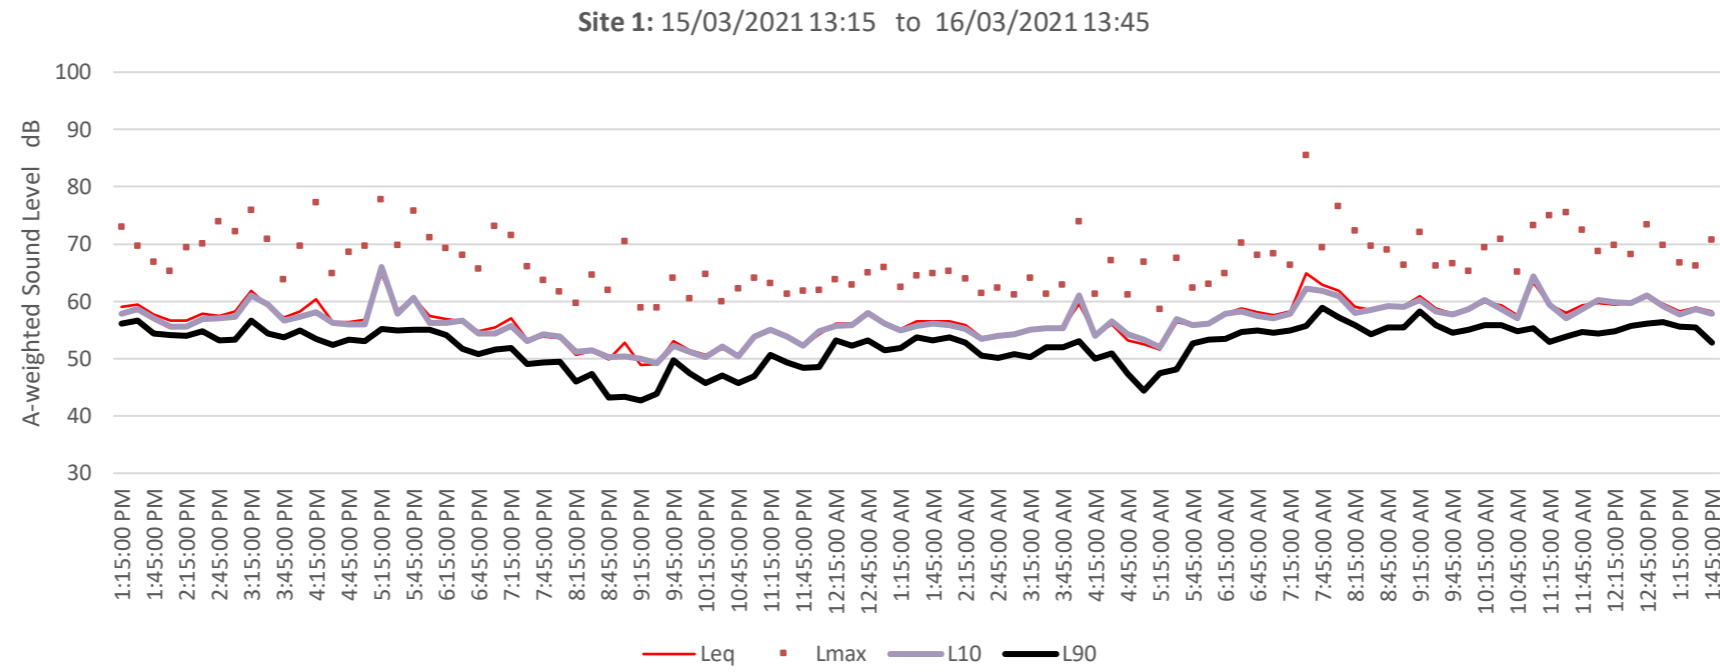


Summary Stats:

		LAeq	LAmax	LA10	LA90
DAY	Max.Day	64.9	85.4	66	58.9
	Min Day	54.8	63.8	54.4	50.8
	Av. Day	58.9	70.4	58.4	54.7
EVENING	Max Evening	57	71.5	55.7	51.8
	Min Evening	48.9	58.8	49.2	42.7
	Av. Evening	52.1	63.5	51.9	47.0
NIGHT	Max Night	57.2	69.3	58	52.75
	Min Night	51.1	59.25	51.1	45.05
	Av.Night	54.1	63.3	54.1	49.6


Site 1 - DAY (7am to 7pm)

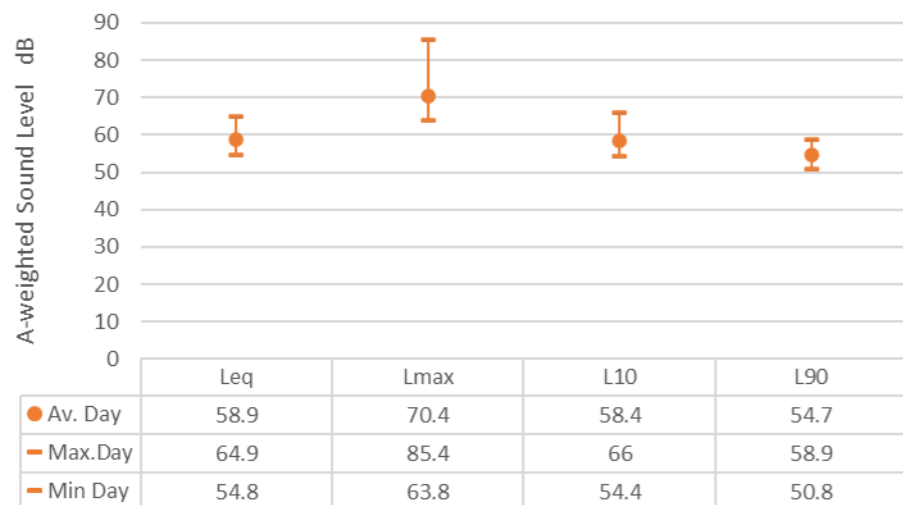


Site 1 - EVENING (7pm to 10pm)

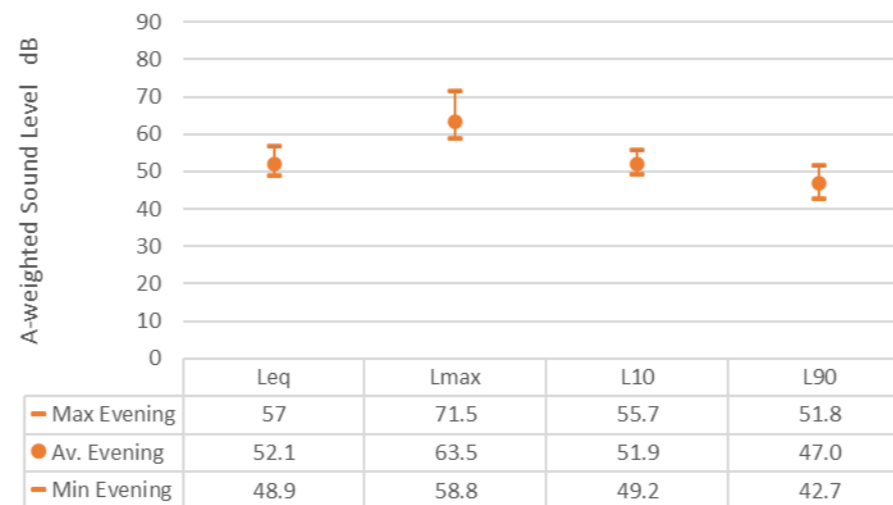

Site 1 - NIGHT (10pm to 7am)

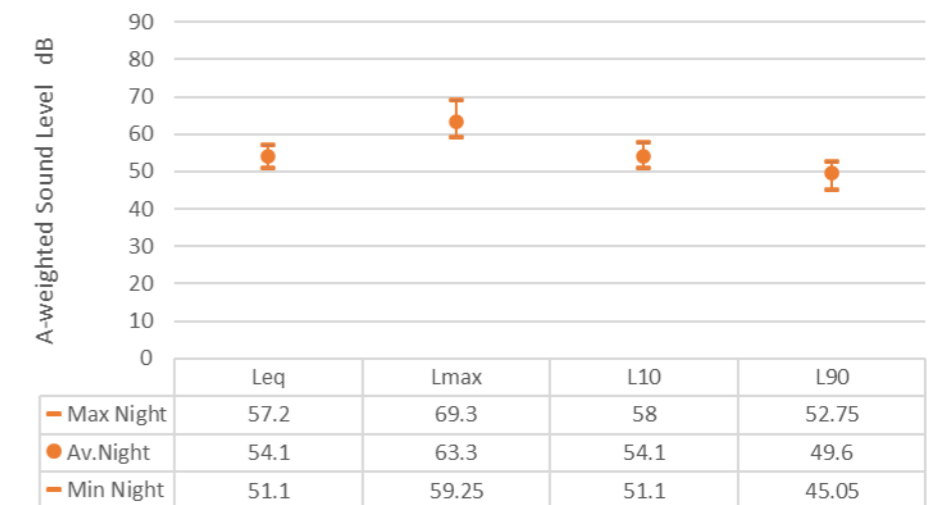


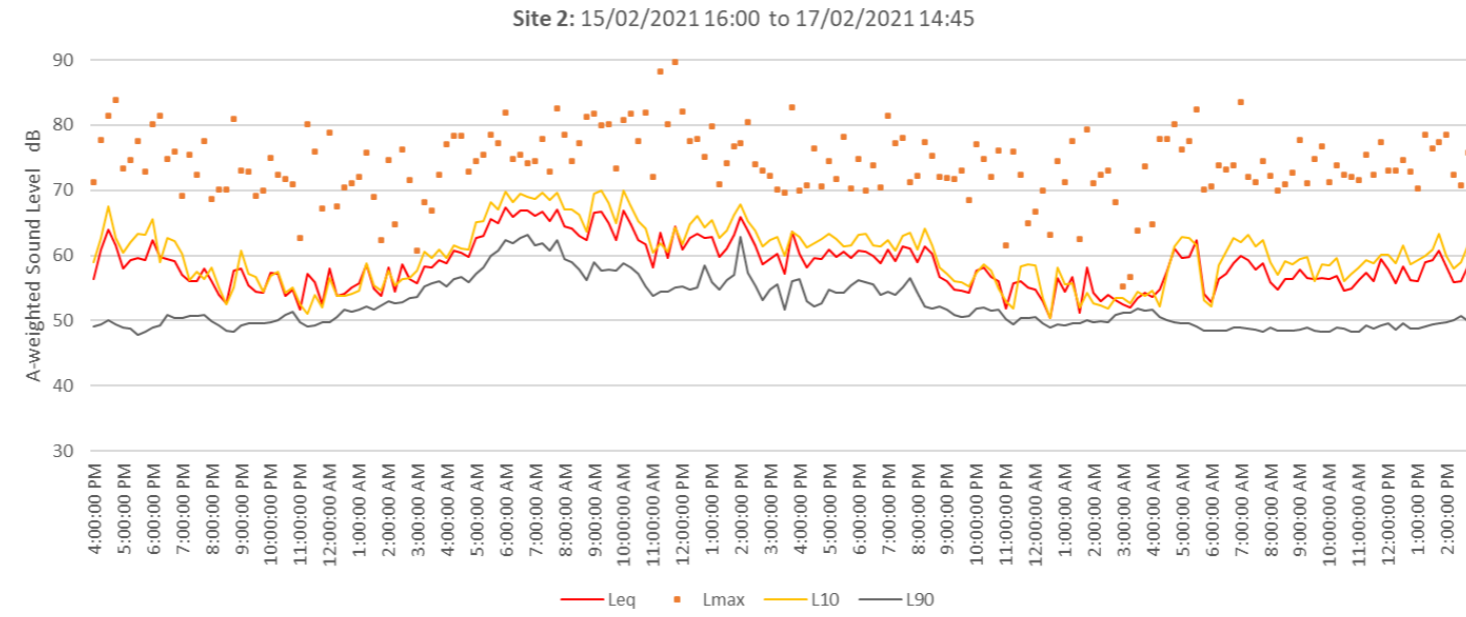


Summary Stats:

		LAeq	LAmx	LA10	LA90
DAY	Max.Day	67	89.6	70	63.1
	Min Day	54.6	69.1	56	47.8
	Av. Day	60.2	75.6	62.6	52.9
EVENING	Max Evening	61.4	81	64.1	56.6
	Min Evening	52.6	68.5	52.5	48.3
	Av. Evening	56.9	73.1	58.0	51.2
NIGHT	Max Night	62.75	81.3	64.25	57.2
	Min Night	51	58.4	50.7	48.75
	Av.Night	56.2	71.9	56.4	51.4


Site 2 - DAY (7am to 7pm)

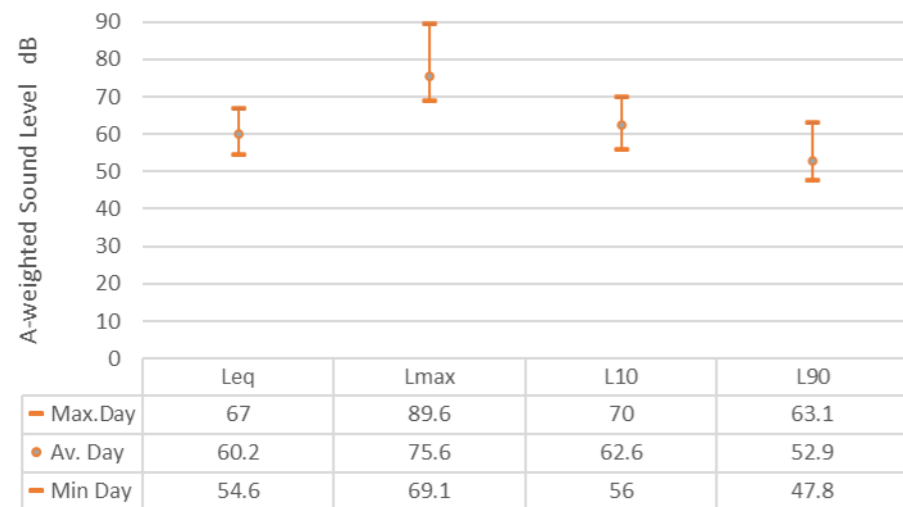


Site 2 - EVENING (7pm to 10pm)

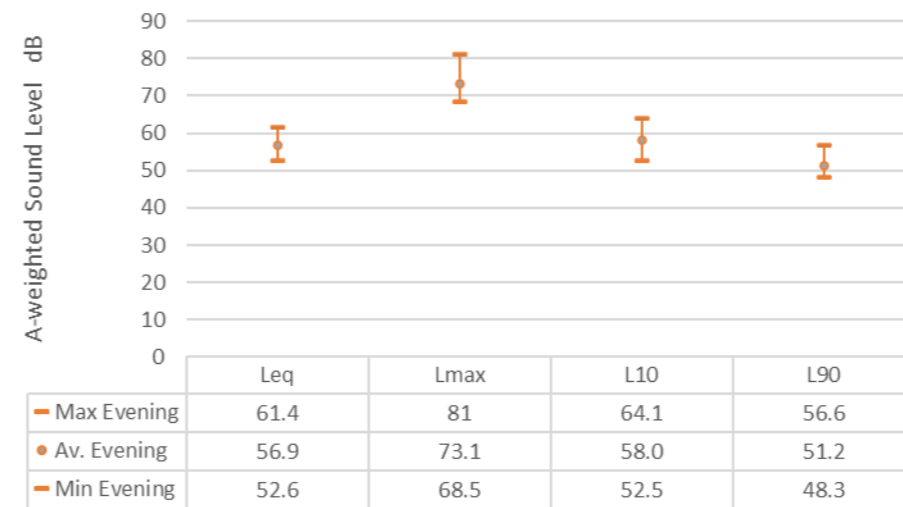

Site 2 - NIGHT (10pm to 7am)

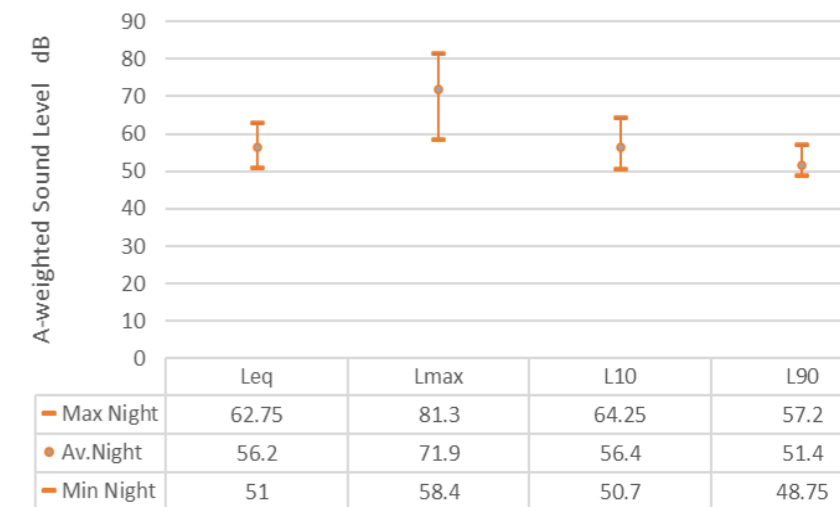


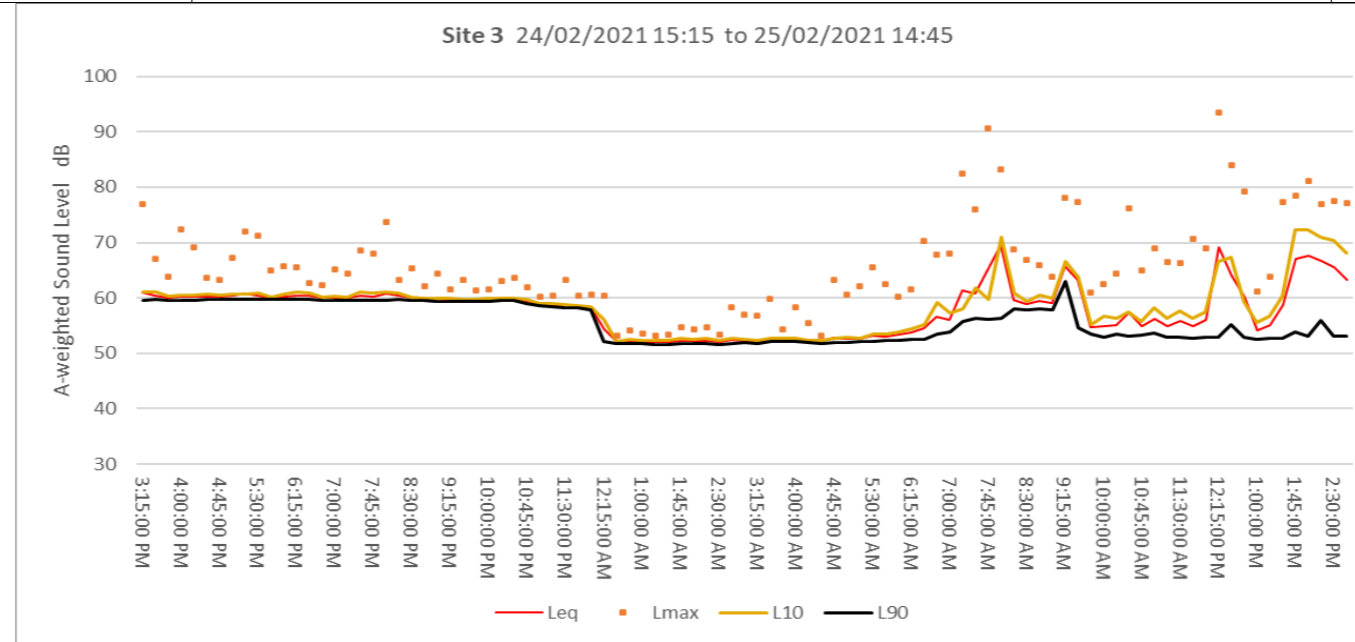


Summary Stats:

		LAeq	LAmx	LA10	LA90
DAY	Max.Day	69.6	93.5	72.3	62.9
	Min Day	54.2	61	55.2	52.6
	Av. Day	60.3	71.3	61.2	56.2
EVENING	Max Evening	60.8	73.7	61.1	59.8
	Min Evening	59.7	61.3	59.8	59.3
	Av. Evening	60.1	65.1	60.3	59.5
NIGHT	Max Night	59.05	67	59.55	58.65
	Min Night	55.35	56.7	55.45	54.95
	Av.Night	56.1	60.1	56.4	55.5


Site 3 - DAY (7am to 7pm)

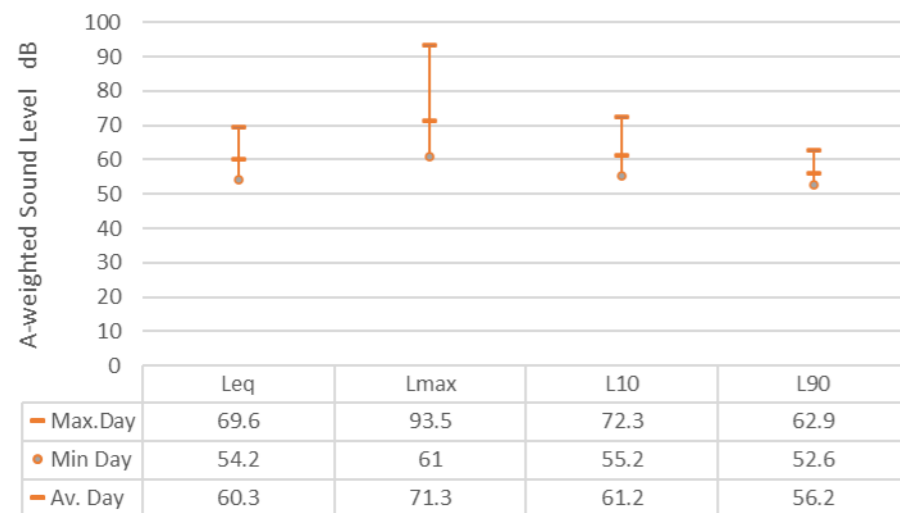


Site 3 - EVENING (7pm to 10pm)

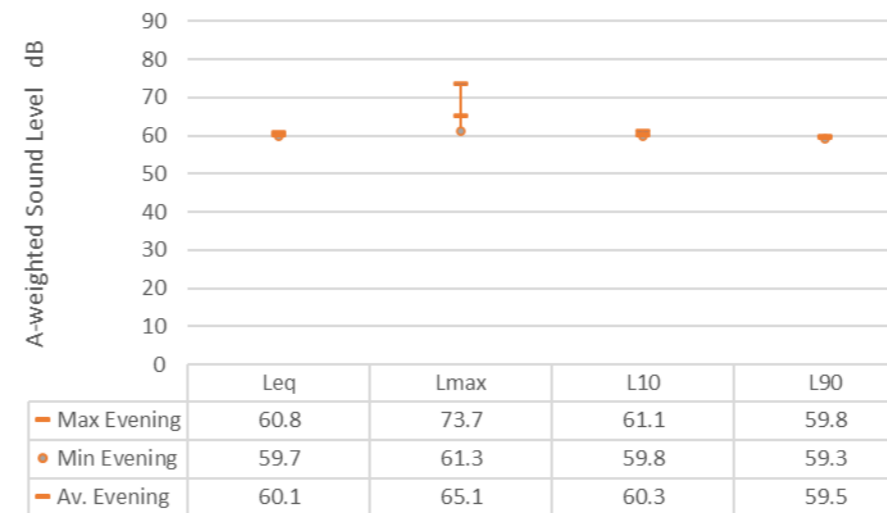

Site 3 - NIGHT (10pm to 7am)

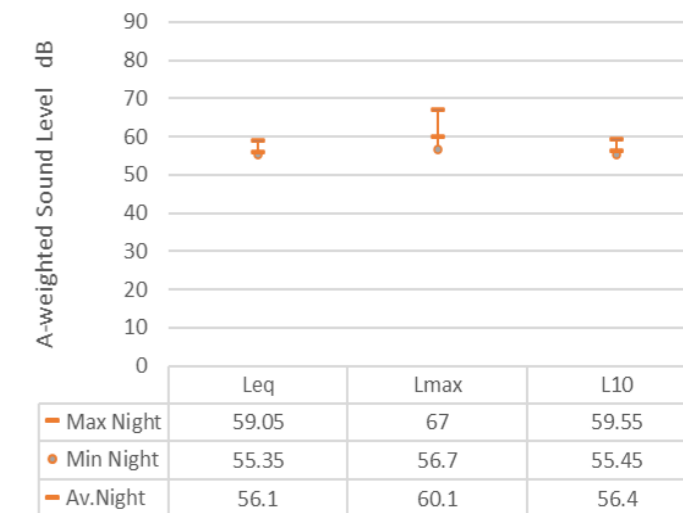


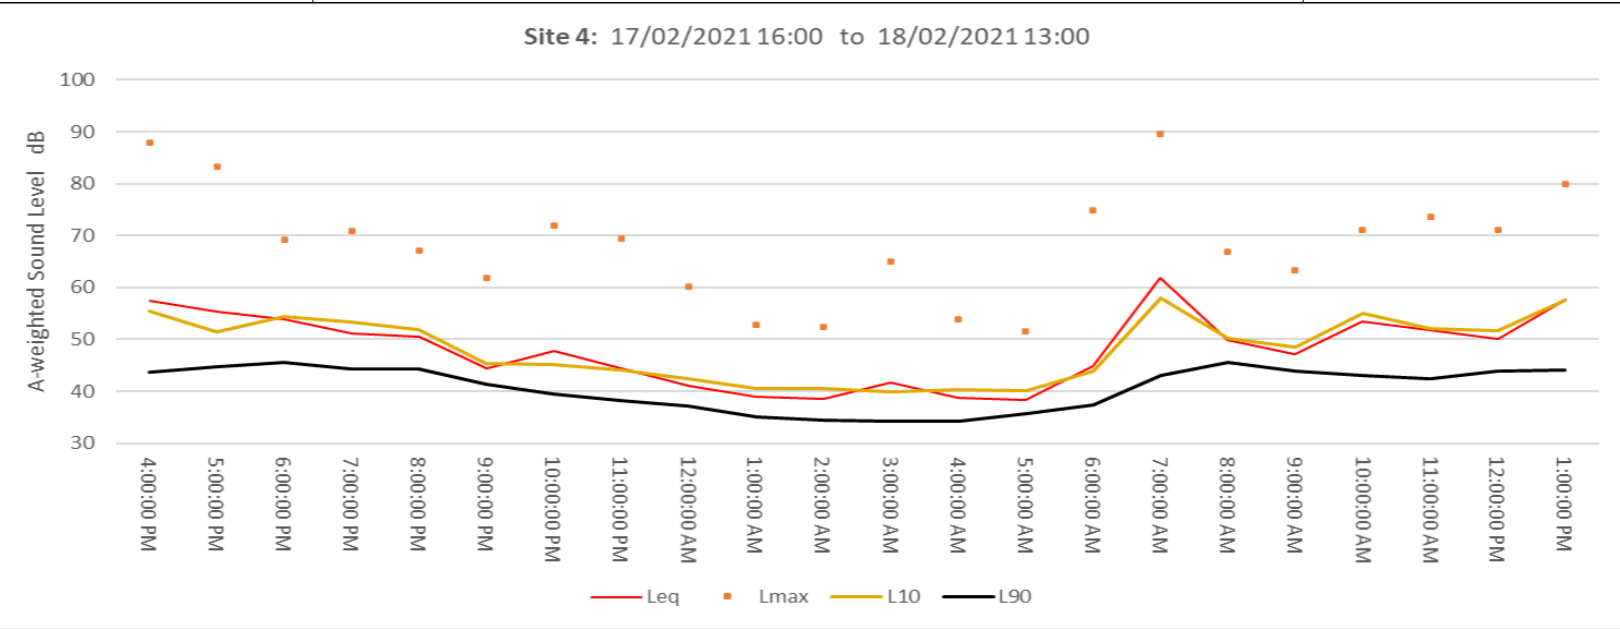


Summary Stats:

		LAeq	LAmx	LA10	LA90
DAY	Max.Day	60.7	83.2	64.5	46.9
	Min Day	46.1	54.9	47.3	38.5
	Av. Day	50.8	67.0	52.5	44.0
EVENING	Max Evening	52.7	72	55.7	45.5
	Min Evening	42.6	52.1	43.8	38.8
	Av. Evening	46.8	61.4	47.7	41.7
NIGHT	Max Night	57.4	79.5	55.9	42.7
	Min Night	39.0	45.3	40.5	35.5
	Av. Night	42.0	54.5	43.2	37.1


Site 4 - DAY (7am to 7pm)

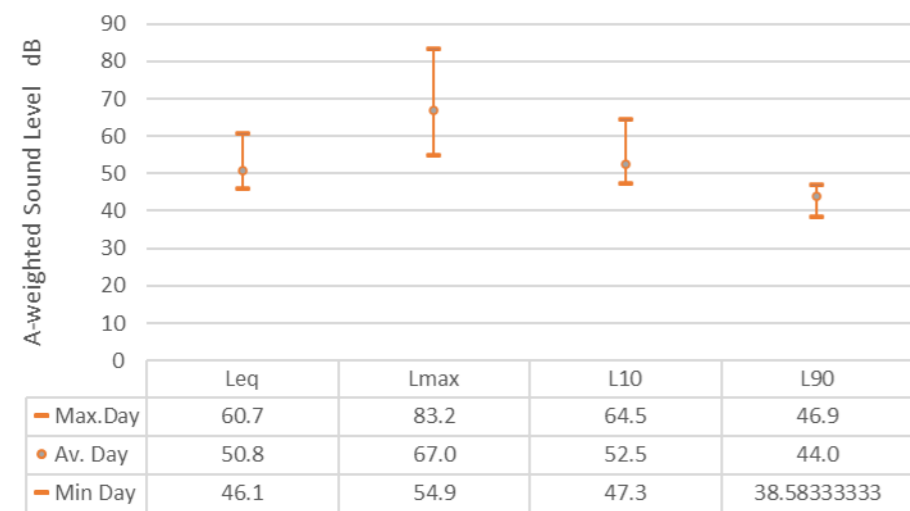

Site 4 - EVENING (7pm to 10pm)

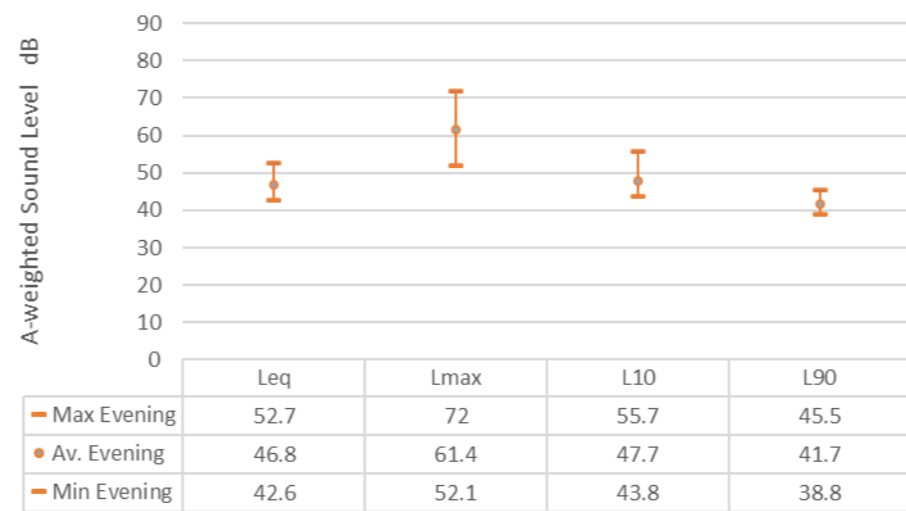


Site 4 - NIGHT (10pm to 7am)

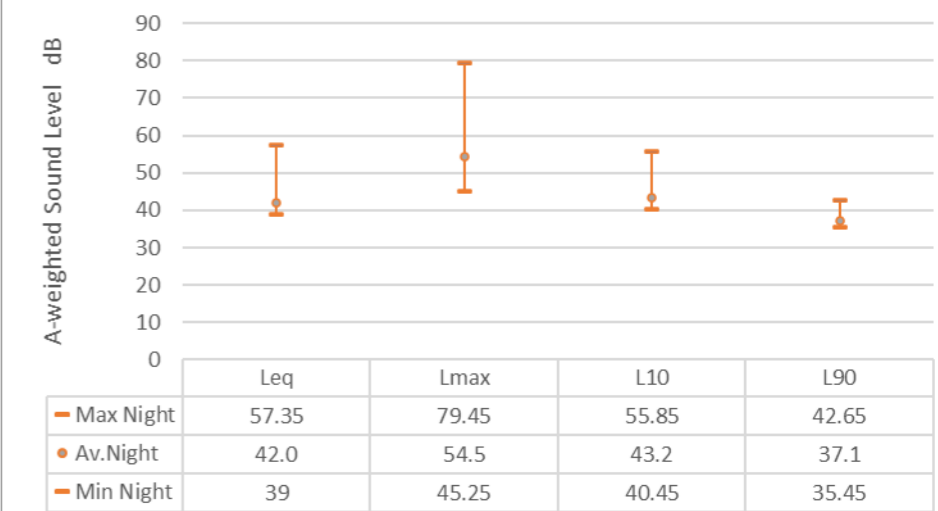

Site Number: 5 21 Rimu Street Eastbourne


Suburban Mixed

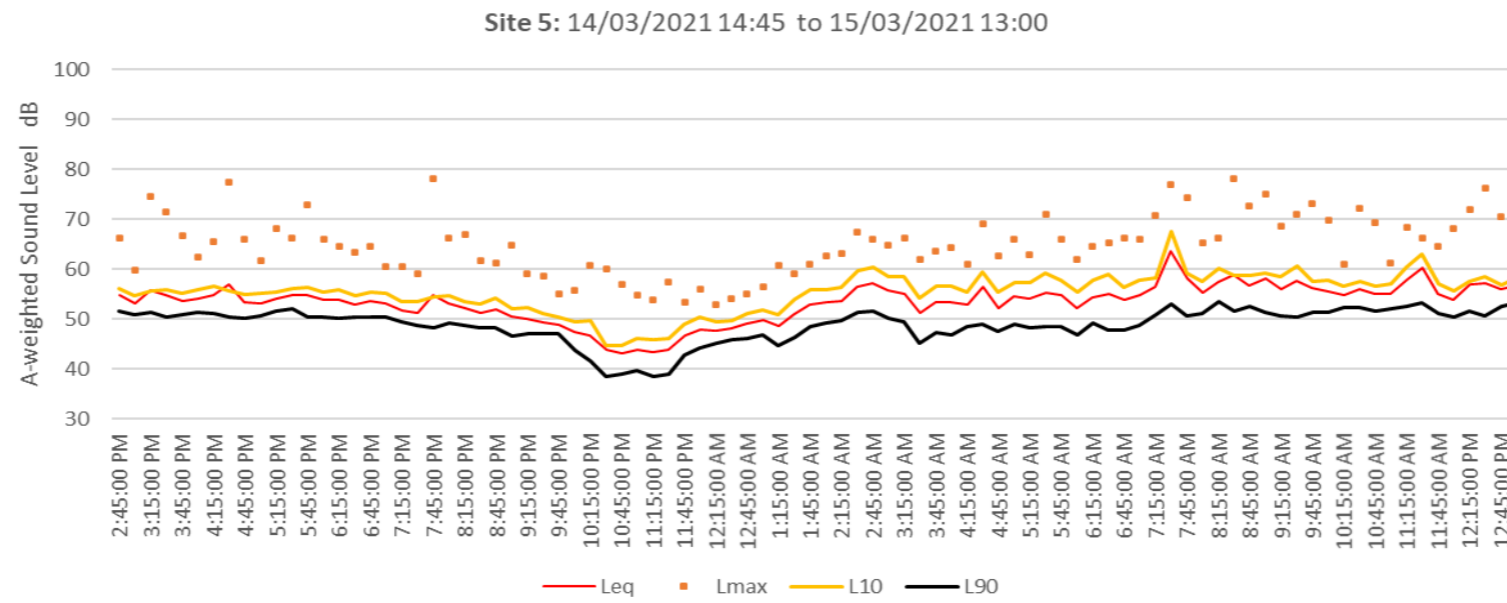


Summary Stats:

		LAeq	LAmax	LA10	LA90
DAY	Max.Day	63.5	78.1	67.6	53.4
	Min Day	53	59.7	54.6	48.7
	Av. Day	55.8	68.7	57.4	51.3
EVENING	Max Evening	54.8	78.2	54.7	49.5
	Min Evening	47.5	55	49.4	43.8
	Av. Evening	51.1	62.3	52.6	47.7
NIGHT	Max Night	52	65.8	55	47.3
	Min Night	45.4	53.25	47.1	41.3
	Av.Night	48.7	59.7	51.2	43.9


Site 5 - DAY (7am to 7pm)

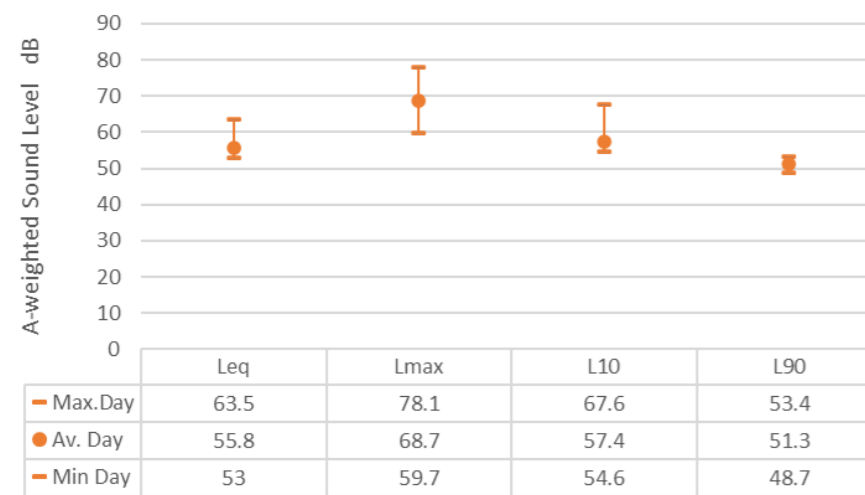

Site 5 - EVENING (7pm to 10pm)

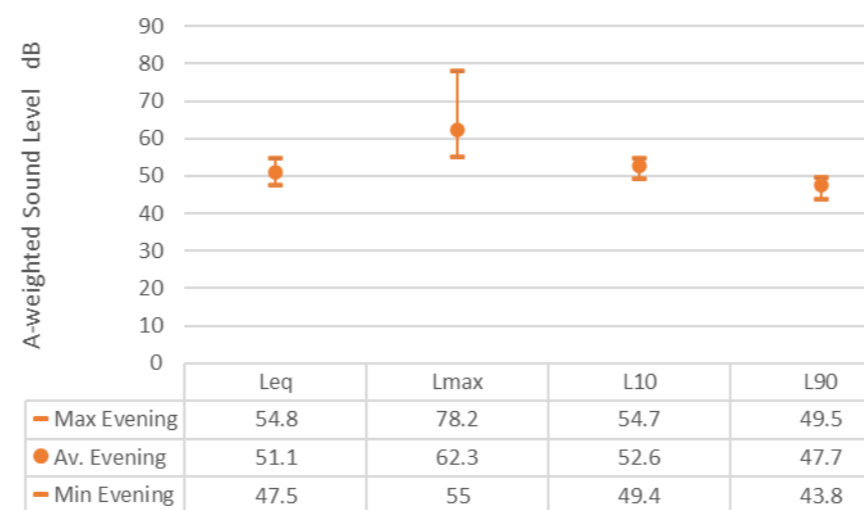


Site 5 - NIGHT (10pm to 7am)

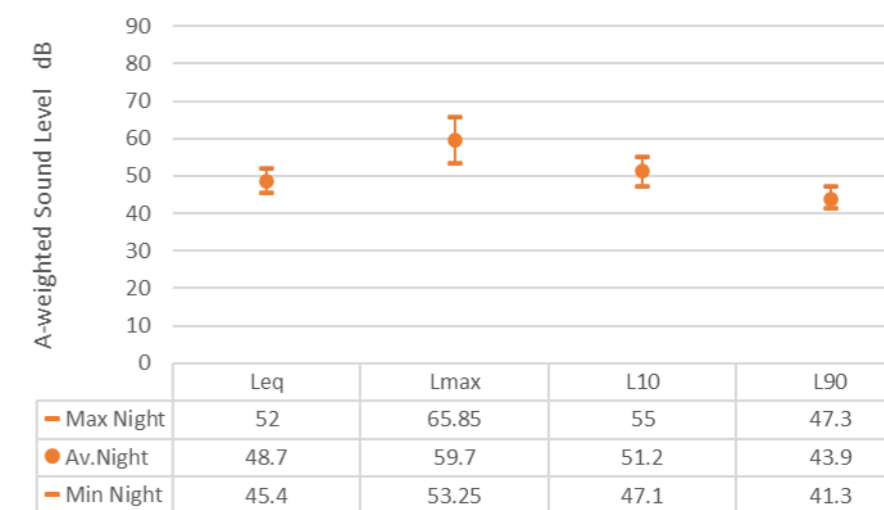

Site Number: 6 362-364 Jackson Street, Petone (1st floor balcony)


Petone Commercial

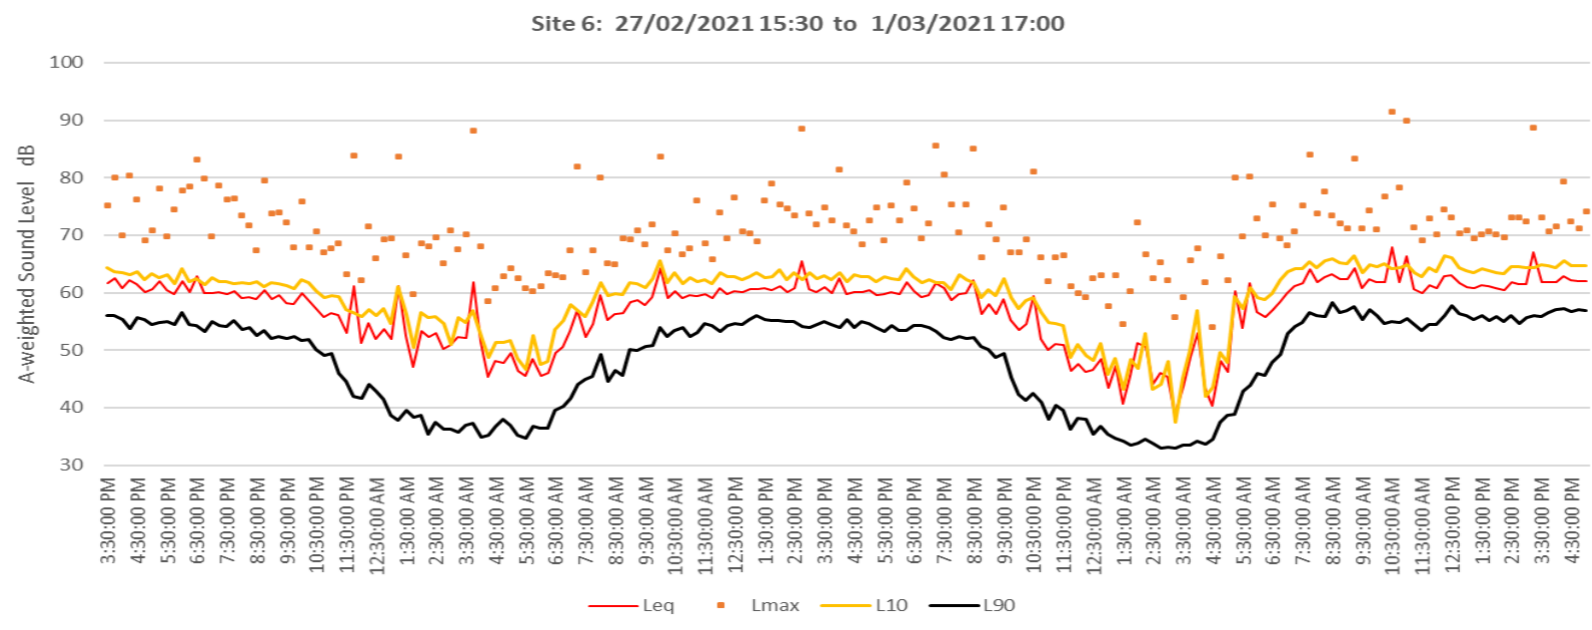


Summary Stats:

		LAeq	LAmax	LA10	LA90
DAY	Max.Day	68.1	90	66.5	58.2
	Min Day	46.4	60.3	49.5	36.6
	Av. Day	62.1	74.6	64.4	55.6
EVENING	Max Evening	68.1	88.4	66.6	55.8
	Min Evening	55.1	66.6	58.4	48.3
	Av. Evening	59.3	72.8	61.8	51.6
NIGHT	Max Night	58.9	76.5	60.7	47.9
	Min Night	42.6	57.2	43.5	34.8
	Av.Night	52.7	67.4	55	43.2


Site 6 - DAY (7am to 7pm)

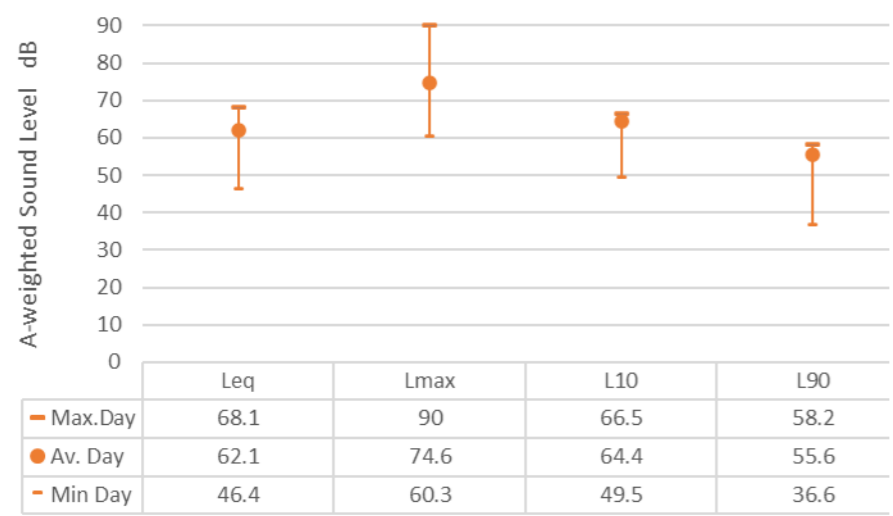

Site 6 - EVENING (7pm to 10pm)

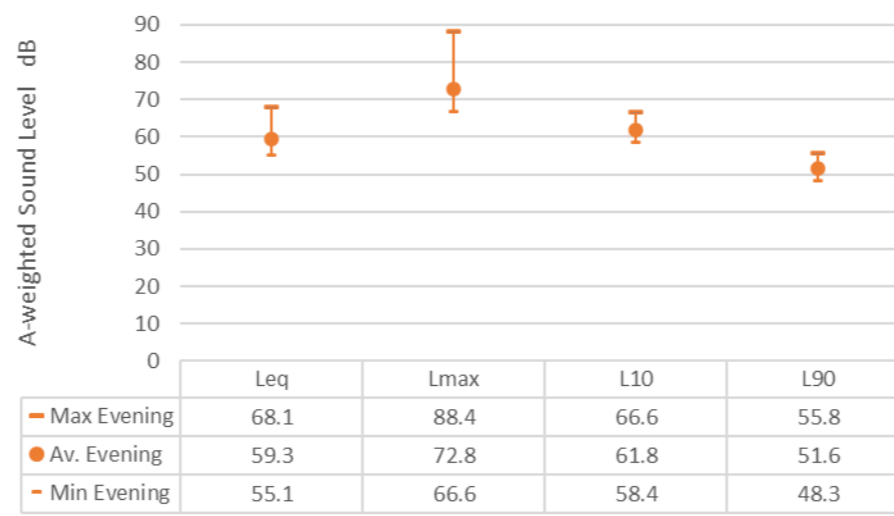


Site 6 - NIGHT (10pm to 7am)

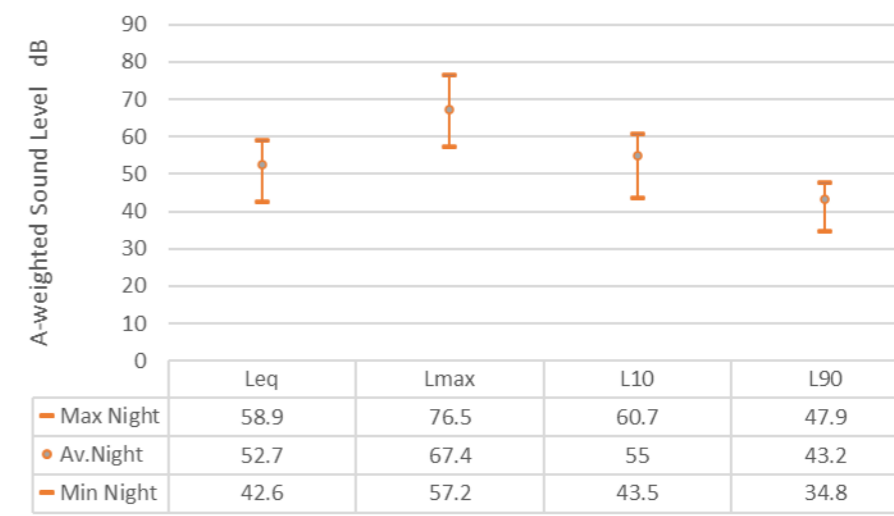

Site Number: 6A

Level 1, 1 Jackson Street Petone (1st floor deck)

Petone Commercial

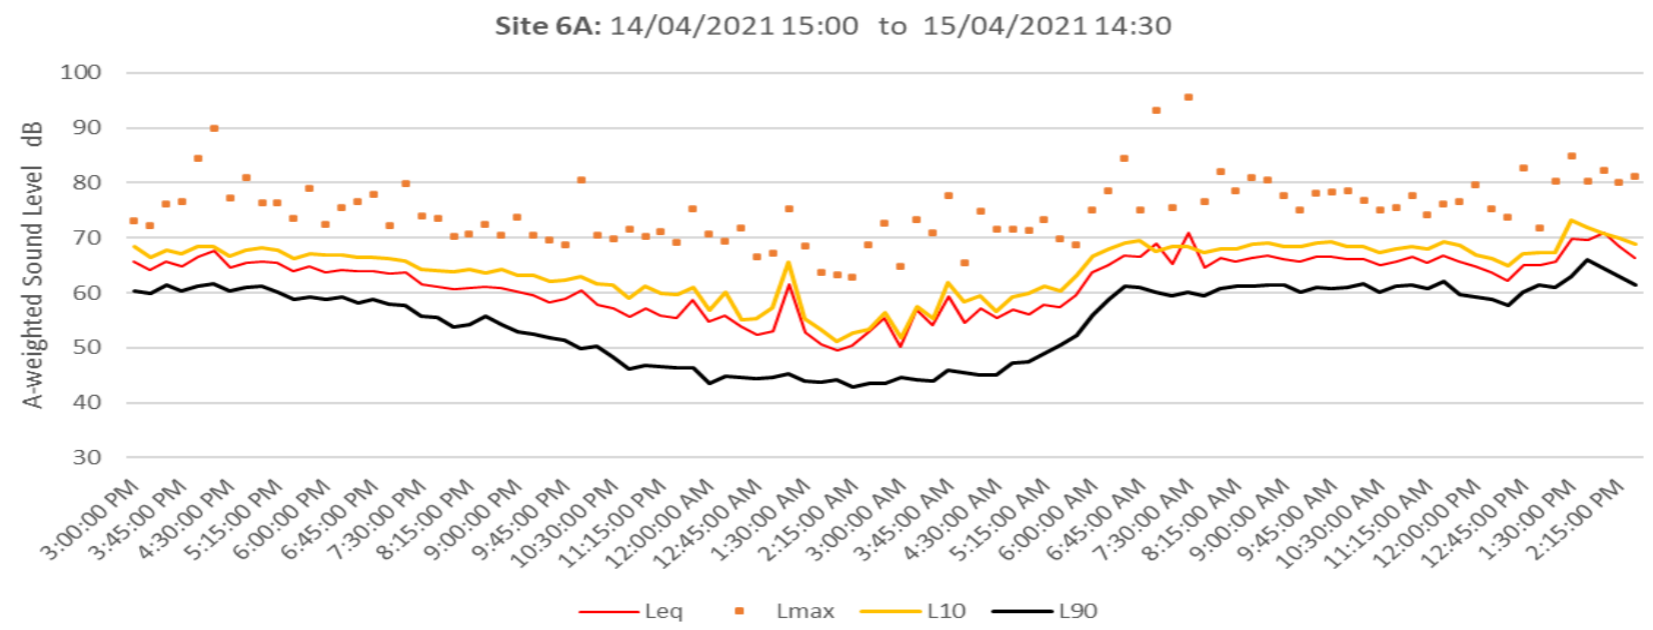

Summary Stats:


		LAeq	LAmax	LA10	LA90
DAY	Max.Day	70.9	95.5	73.3	65.9
	Min Day	62.1	71.9	65	57.7
	Av. Day	65.9	78.6	68.0	60.7
EVENING	Max Evening	63.7	79.8	65.8	57.8
	Min Evening	58.3	68.7	62	51.3
	Av. Evening	60.6	72.2	63.7	54.1
NIGHT	Max Night	62.7	79.9	65.5	55.8
	Min Night	52.6	66.0	55.1	44.6
	Av.Night	56.7	71.0	59.8	47.3

Site 6A - DAY (7am to 7pm)




	Leq	Lmax	L10	L90
Max.Day	70.9	95.5	73.3	65.9
Av. Day	65.9	78.6	68.0	60.7
Min Day	62.1	71.9	65	57.7

Site 6A - EVENING (7pm to 10pm)

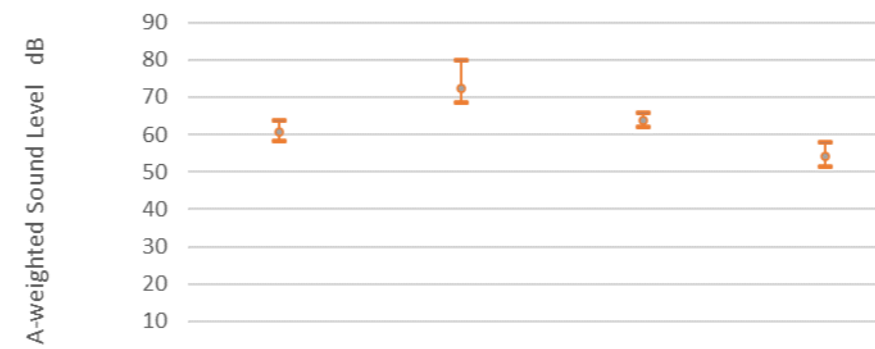

	Leq	Lmax	L10	L90
Max Evening	63.7	79.8	65.8	57.8
Av. Evening	60.6	72.2	63.7	54.1
Min Evening	58.3	68.7	62	51.3


Site 6A - NIGHT (10pm to 7am)

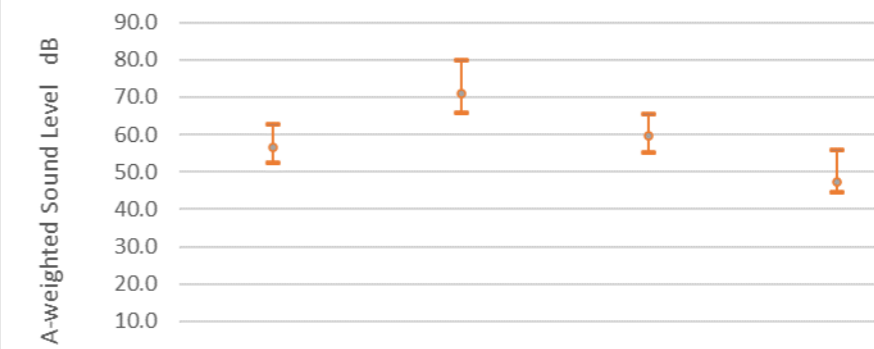

	Leq	Lmax	L10	L90
Max Night	62.7	79.9	65.5	55.8
Av.Night	56.7	71.0	59.8	47.3
Min Night	52.6	66.0	55.1	44.6

Site Number: 7 4-6 Heretaunga Street, Petone


Medium Density

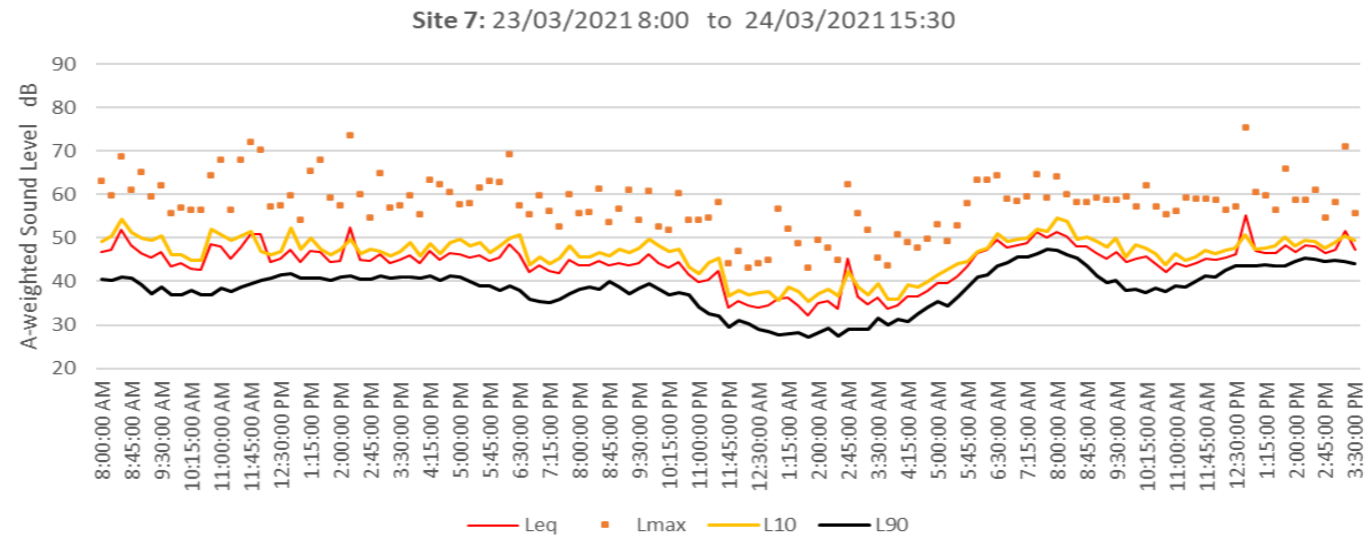


Summary Stats:

		LAeq	LAmax	LA10	LA90
DAY	Max.Day	52.5	73.7	54.6	47.3
	Min Day	42.1	54.2	43.9	35.8
	Av. Day	46.6	61.3	48.7	40.3
EVENING	Max Evening	46.2	61.3	49.6	40.1
	Min Evening	42	52.6	44.1	35.1
	Av. Evening	44.0	56.7	46.8	38.0
NIGHT	Max Night	47.0	62.4	49.3	40.9
	Min Night	33.1	43.7	36.1	28.2
	Av.Night	39.5	52.8	41.9	33.3


Site 7 - DAY (7am to 7pm)

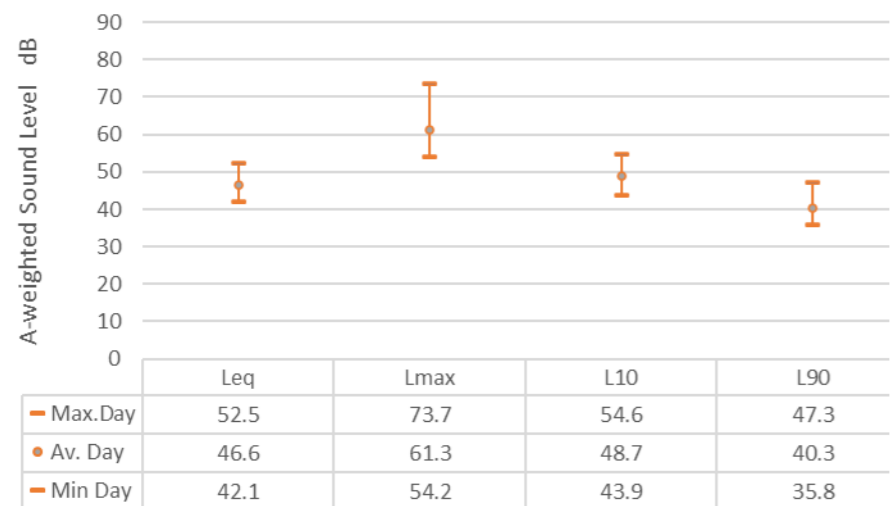

Site 7 - EVENING (7pm to 10pm)

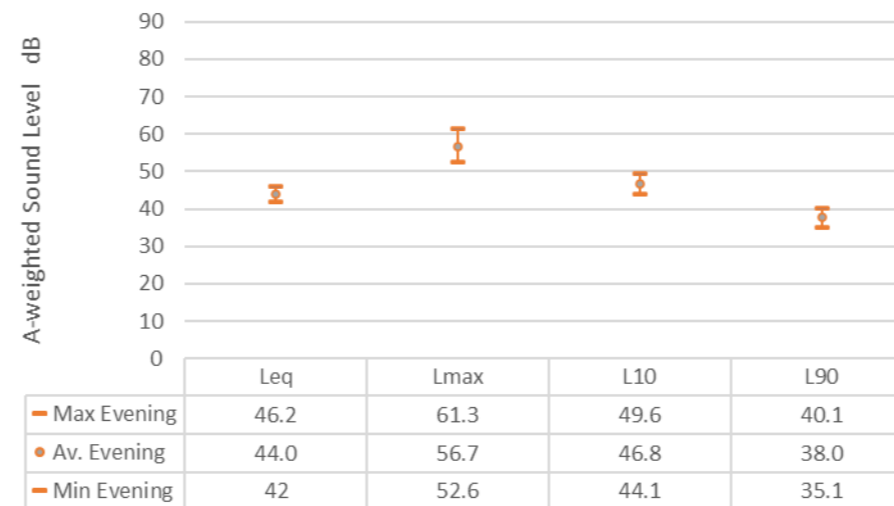


Site 7 - NIGHT (10pm to 7am)

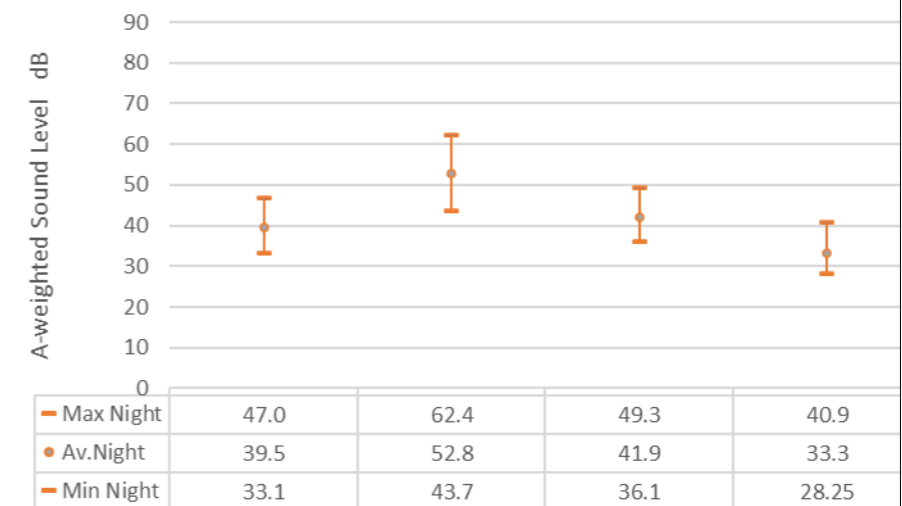




Site Number: 8 63 Hay Street Naenae

General Residential

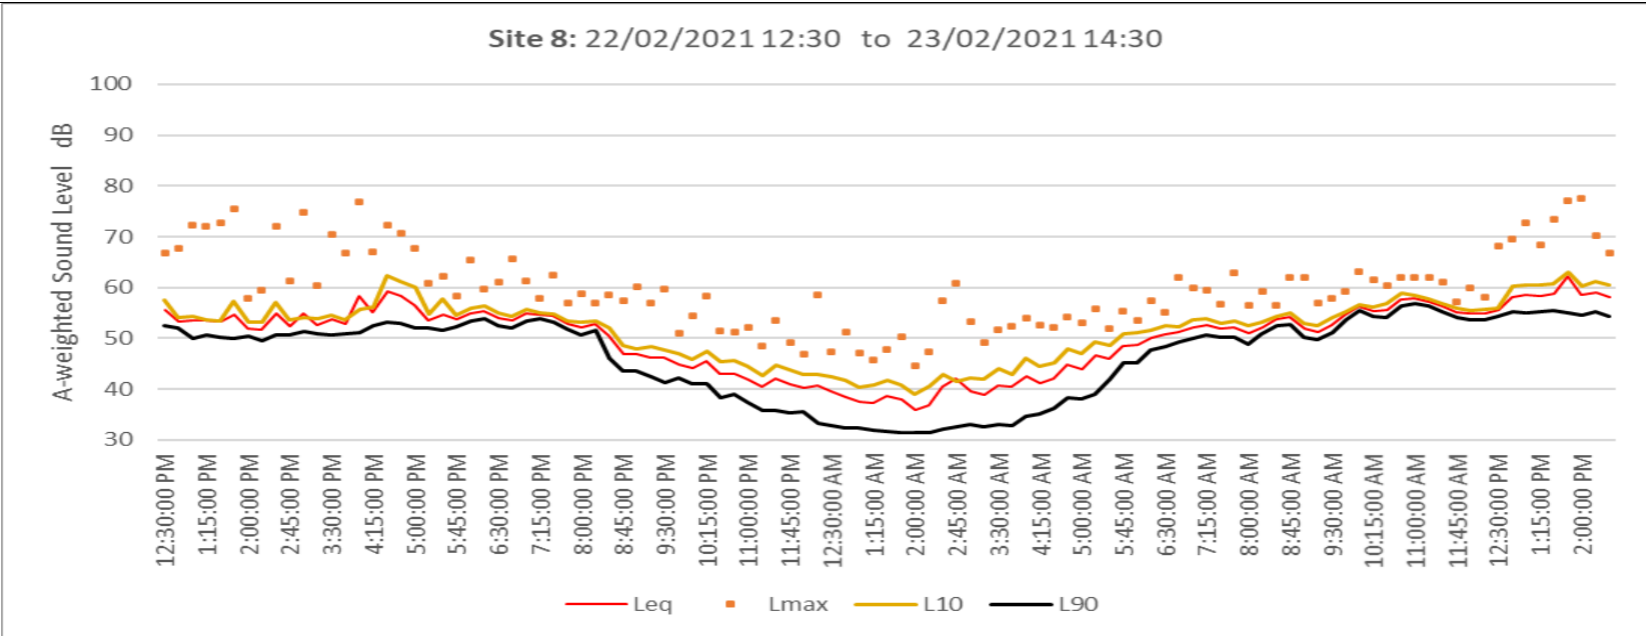



Summary Stats:

		LAeq	LAmax	LA10	LA90
DAY	Max.Day	62.3	77.6	63	56.9
	Min Day	51.1	56.4	52.6	48.9
	Av. Day	55.0	64.8	56.2	52.6
EVENING	Max Evening	54.6	62.4	55	53.9
	Min Evening	44.1	51	45.8	41.1
	Av. Evening	49.4	57.6	50.6	46.8
NIGHT	Max Night	48.4	60.2	49.9	45.2
	Min Night	38.3	46.6	40.9	33.4
	Av.Night	42.3	52.3	44.9	37.0

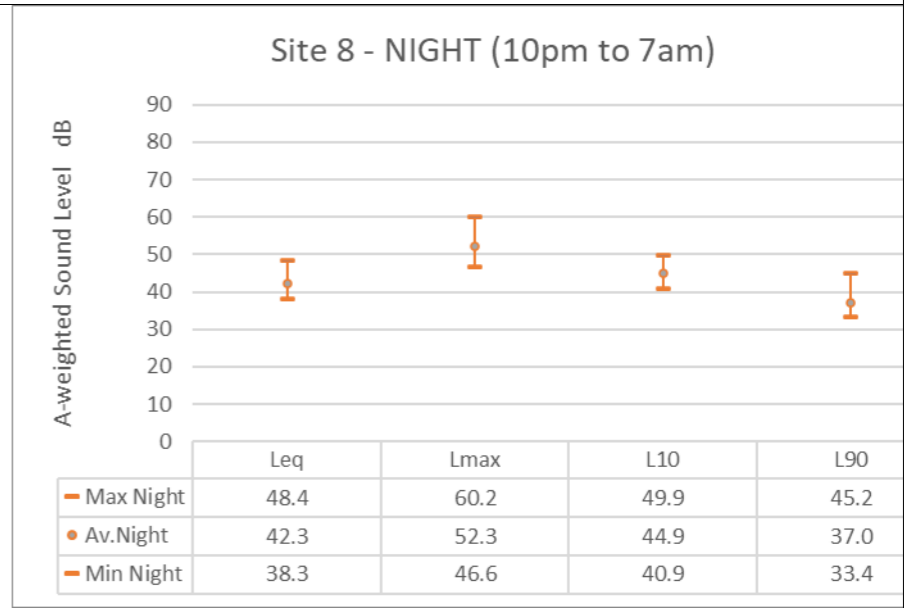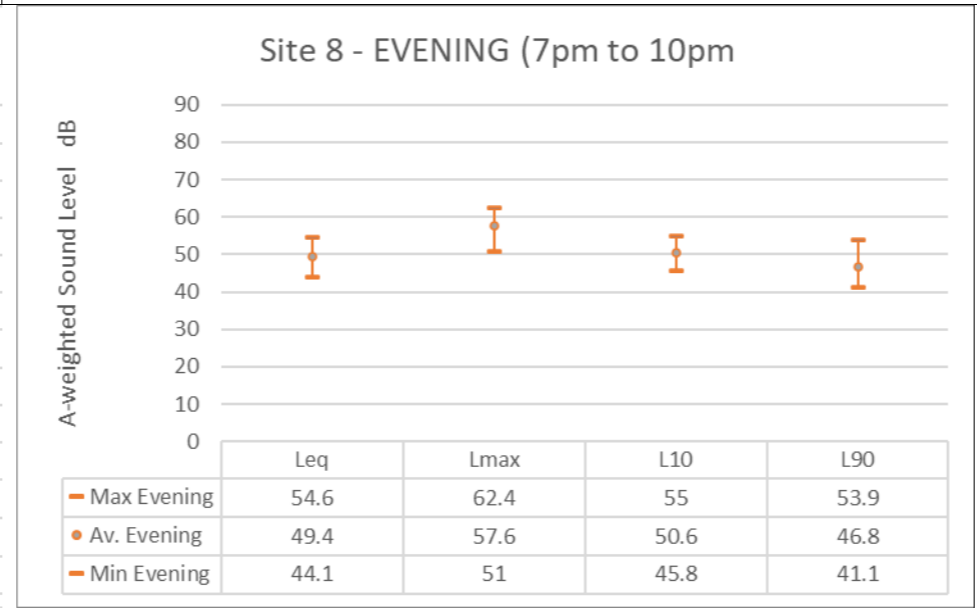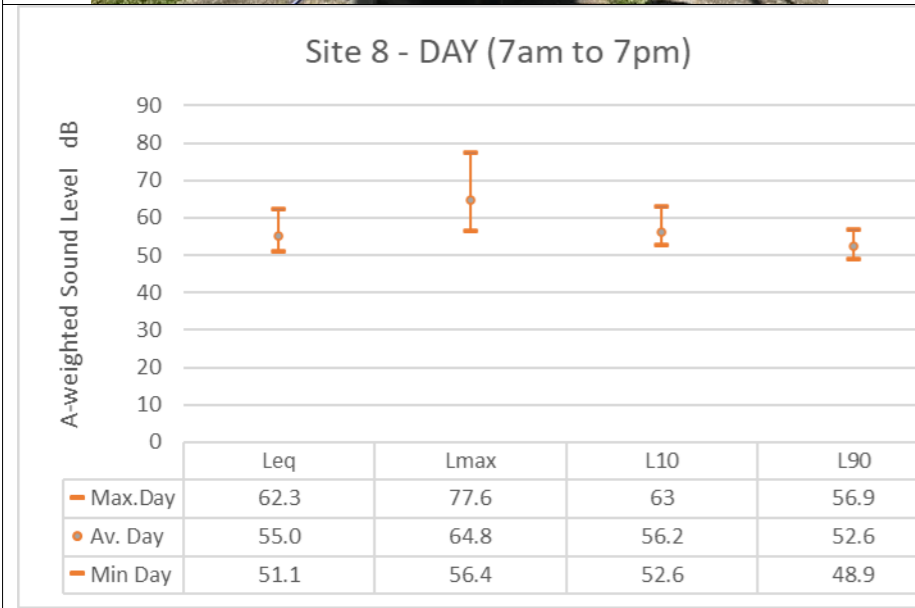




Site Number: 9 57 Queens Grove, CBD

General Residential

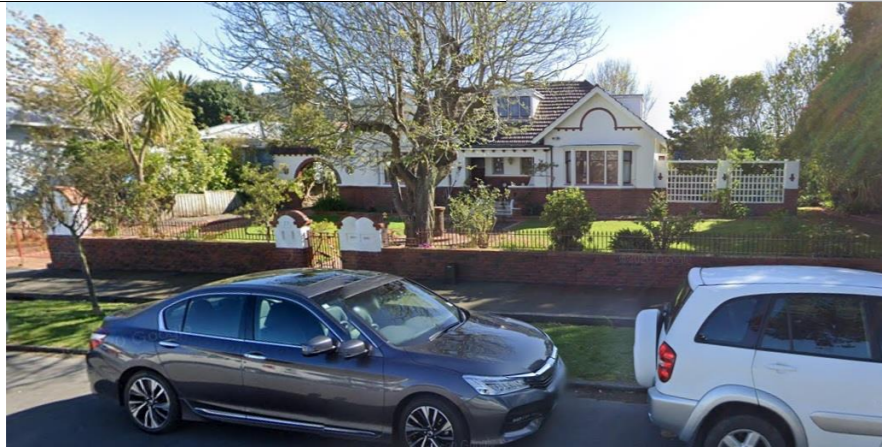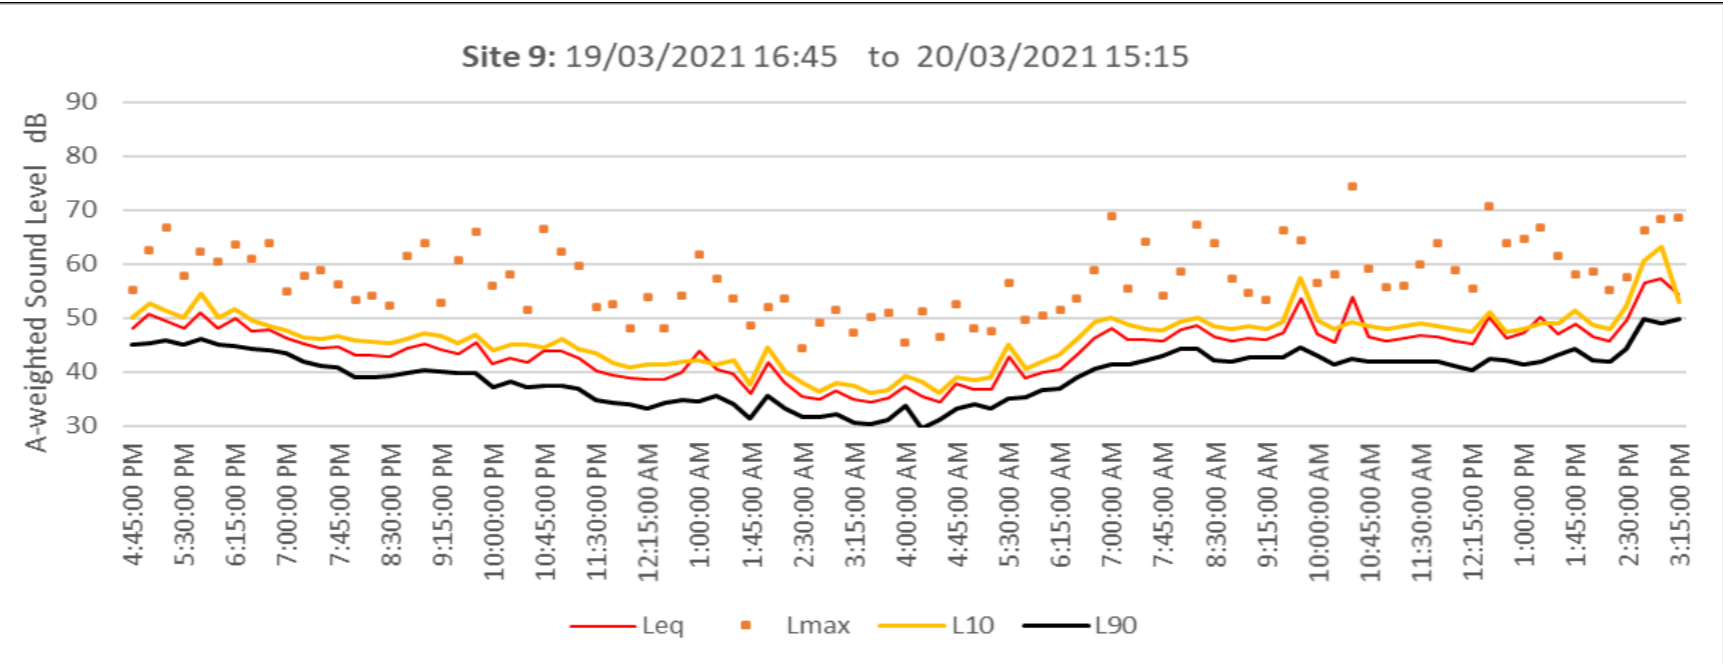


Summary Stats:

		LAeq	LAmix	LA10	LA90
DAY	Max.Day	57.4	74.5	63.3	49.8
	Min Day	45.2	53.3	47.4	40.3
	Av. Day	48.3	61.4	50.2	43.5
EVENING	Max Evening	46.2	65.9	47.8	43.4
	Min Evening	42.9	52.2	45.4	39.1
	Av. Evening	44.4	57.7	46.4	40.4
NIGHT	Max Night	45.05	64.15	47.7	39.5
	Min Night	36.9	48.05	38.85	31.95
	Av.Night	40.2	54.4	42.4	35.2

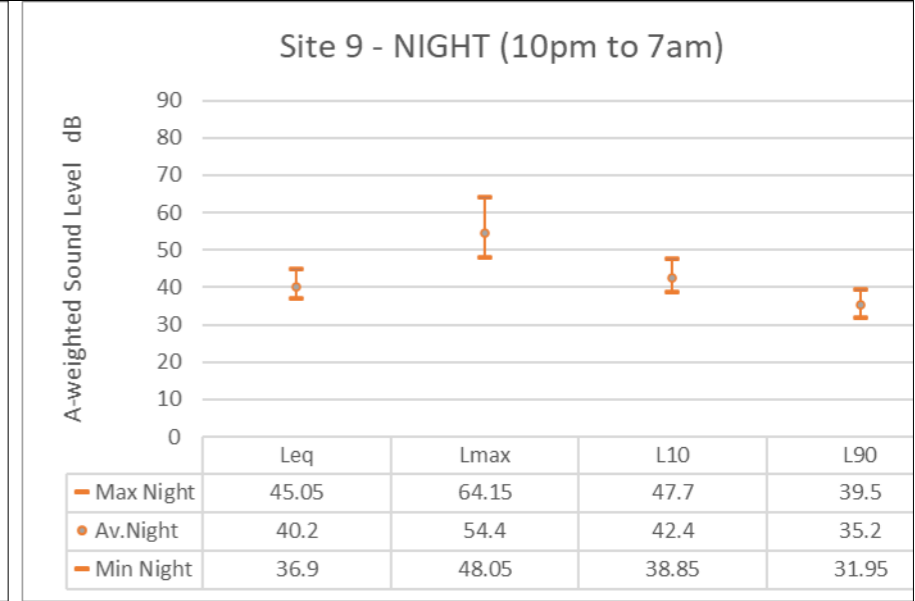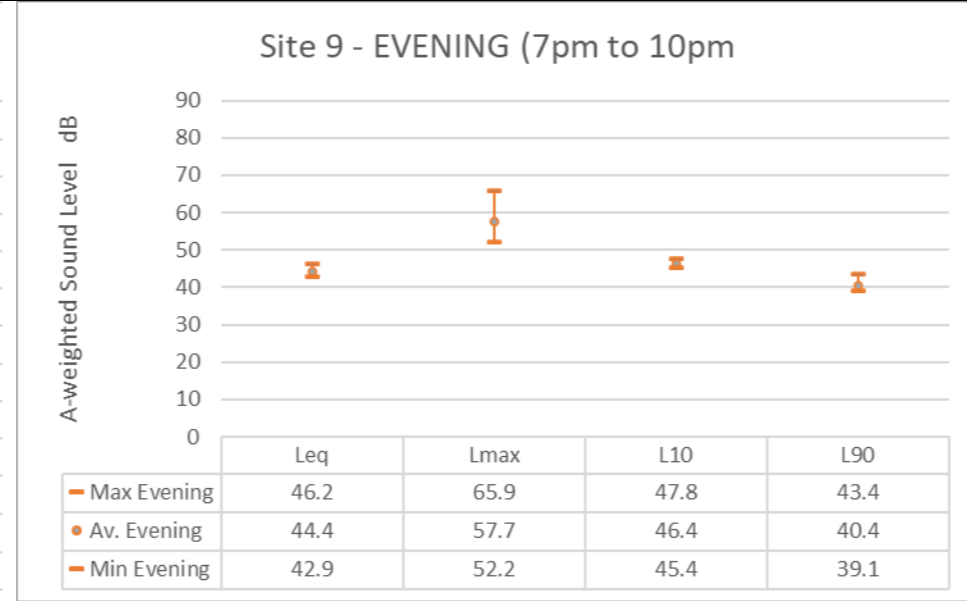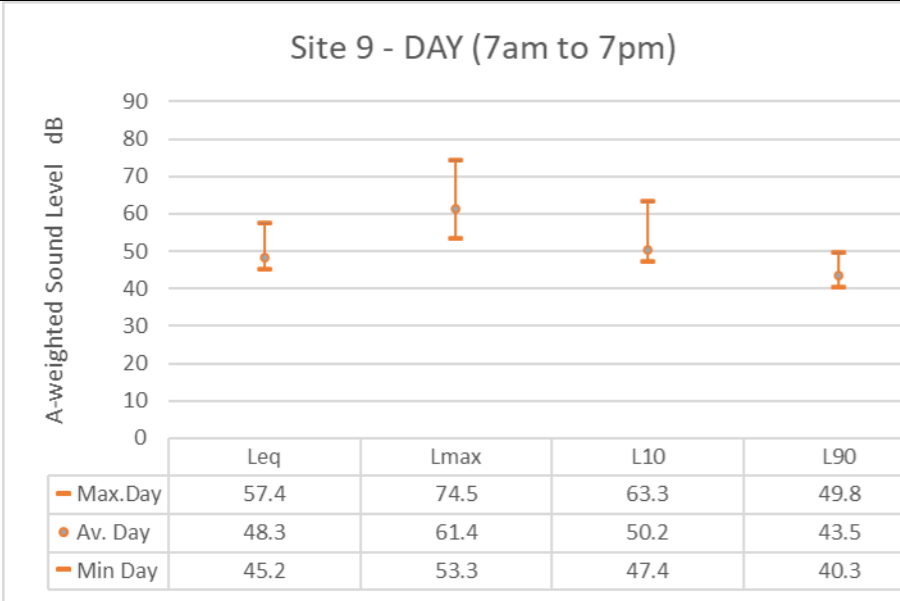




Site Number: 10 57A Cypress Drive Maungaraki



General Residential

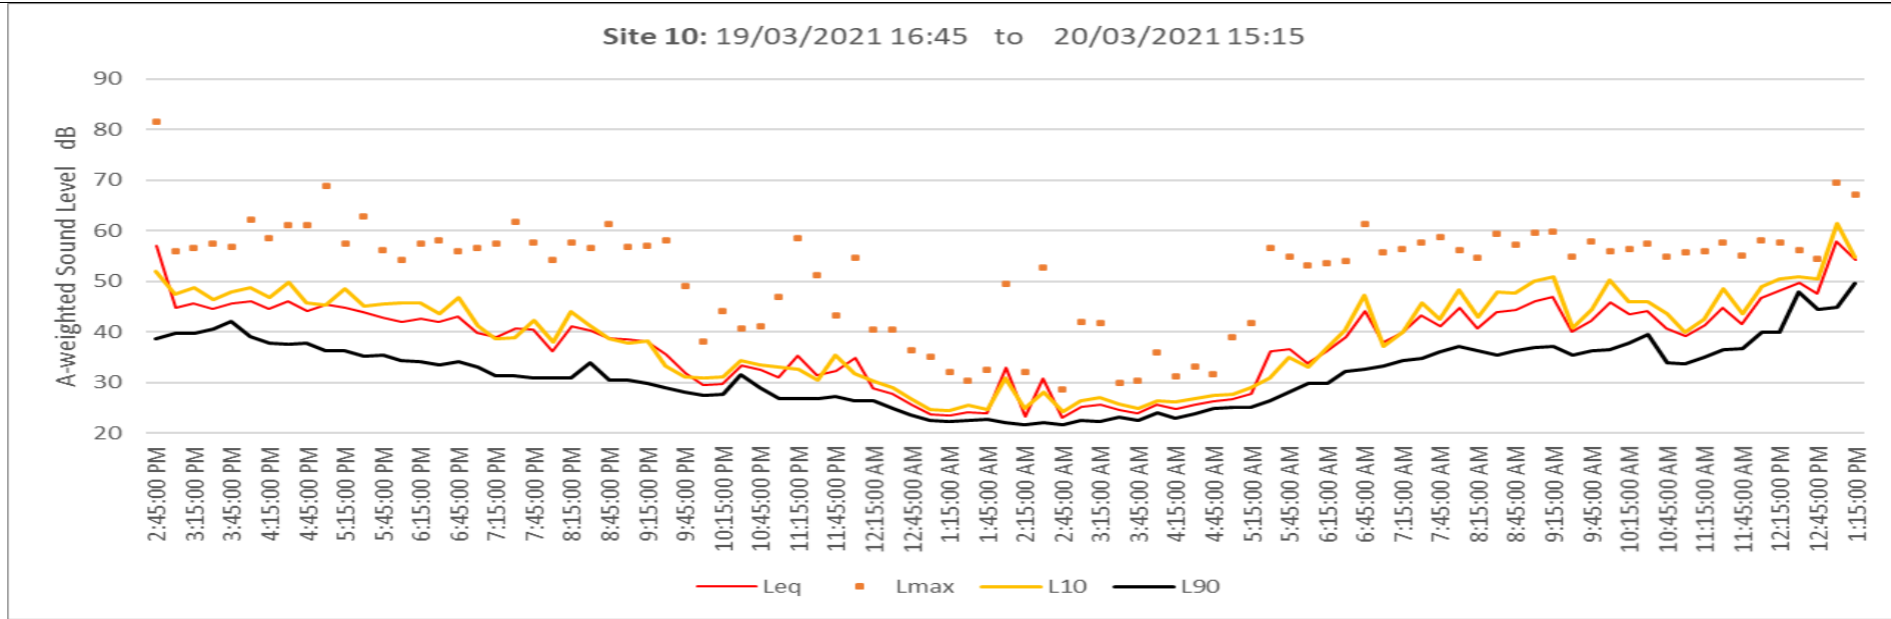

Summary Stats:

		LAeq	LAmx	LA10	LA90
DAY	Max.Day	58	81.5	61.5	49.6
	Min Day	37.9	54.4	37.1	33.3
	Av. Day	45.4	58.9	47.4	38.6
EVENING	Max Evening	46.1	68.8	49.9	37.7
	Min Evening	38.9	54.2	38.7	31.4
	Av. Evening	43.0	59.0	45.2	35.0
NIGHT	Max Night	42.7	61.6	45.6	33.3
	Min Night	29.7	41.5	31.0	25.8
	Av.Night	34.0	49.6	34.5	28.0

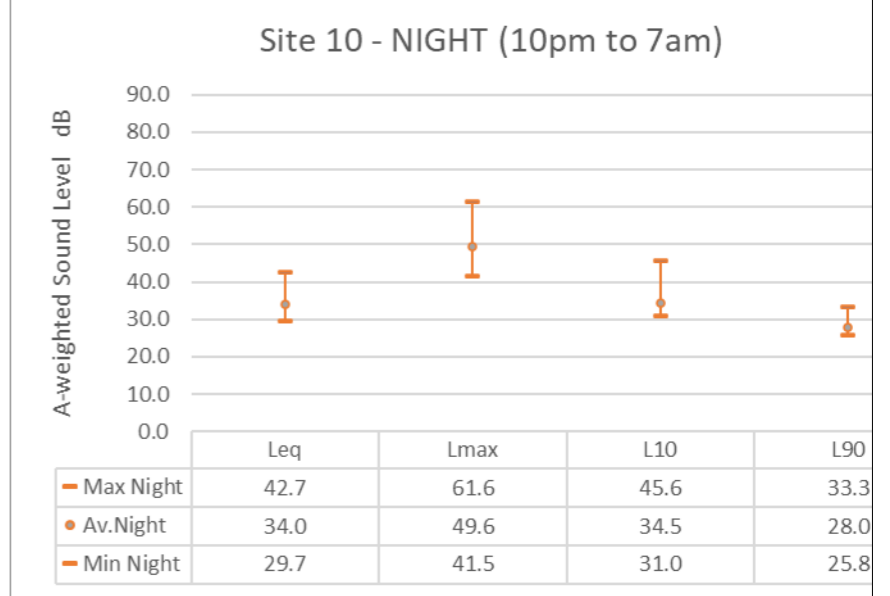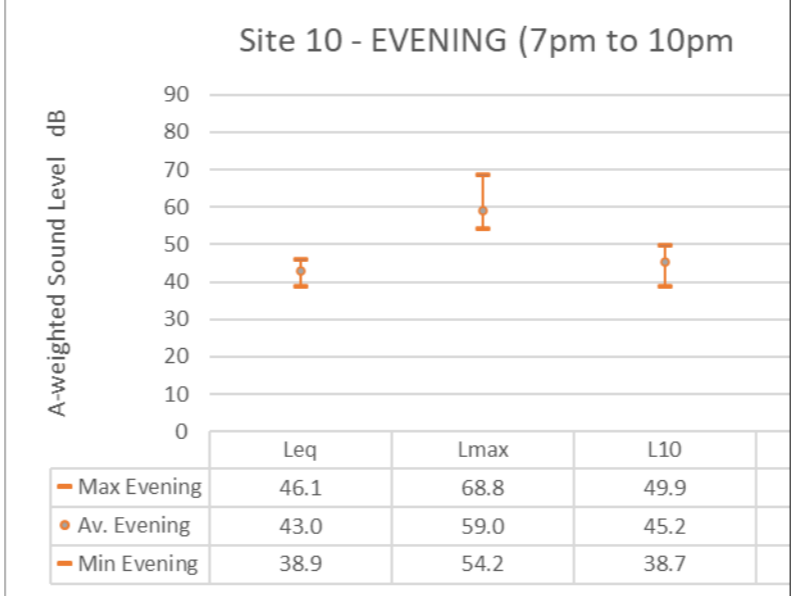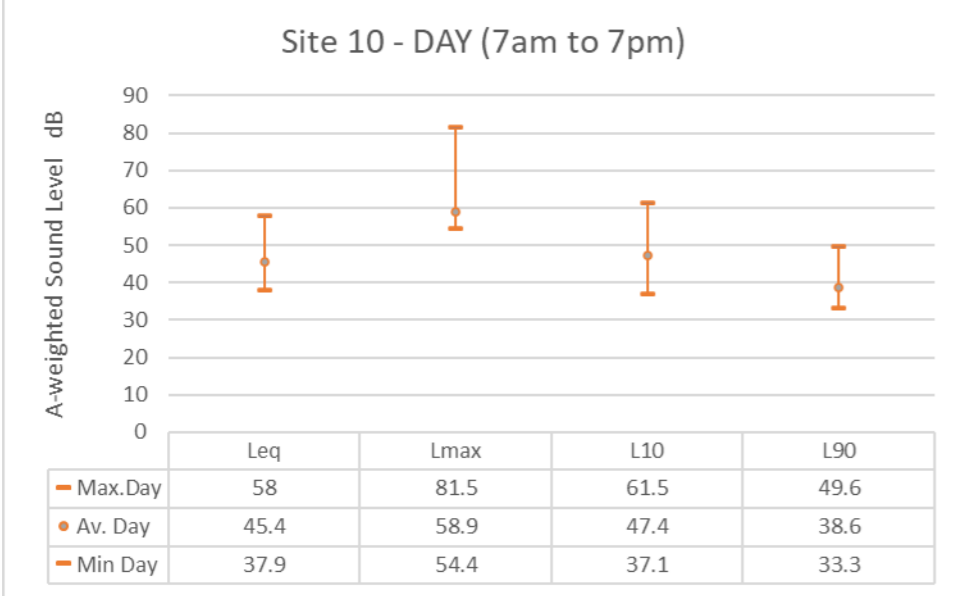


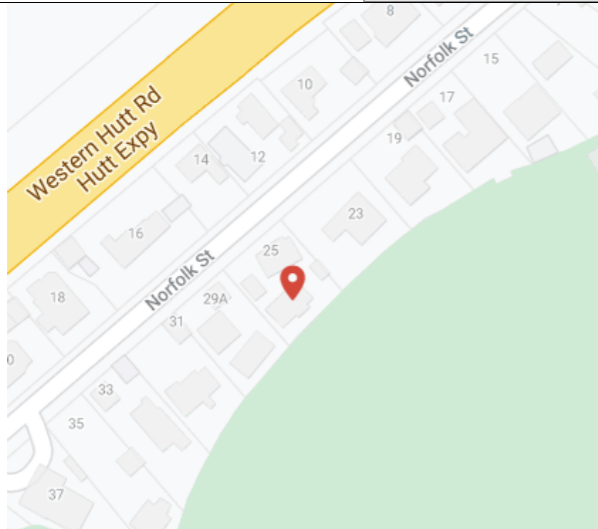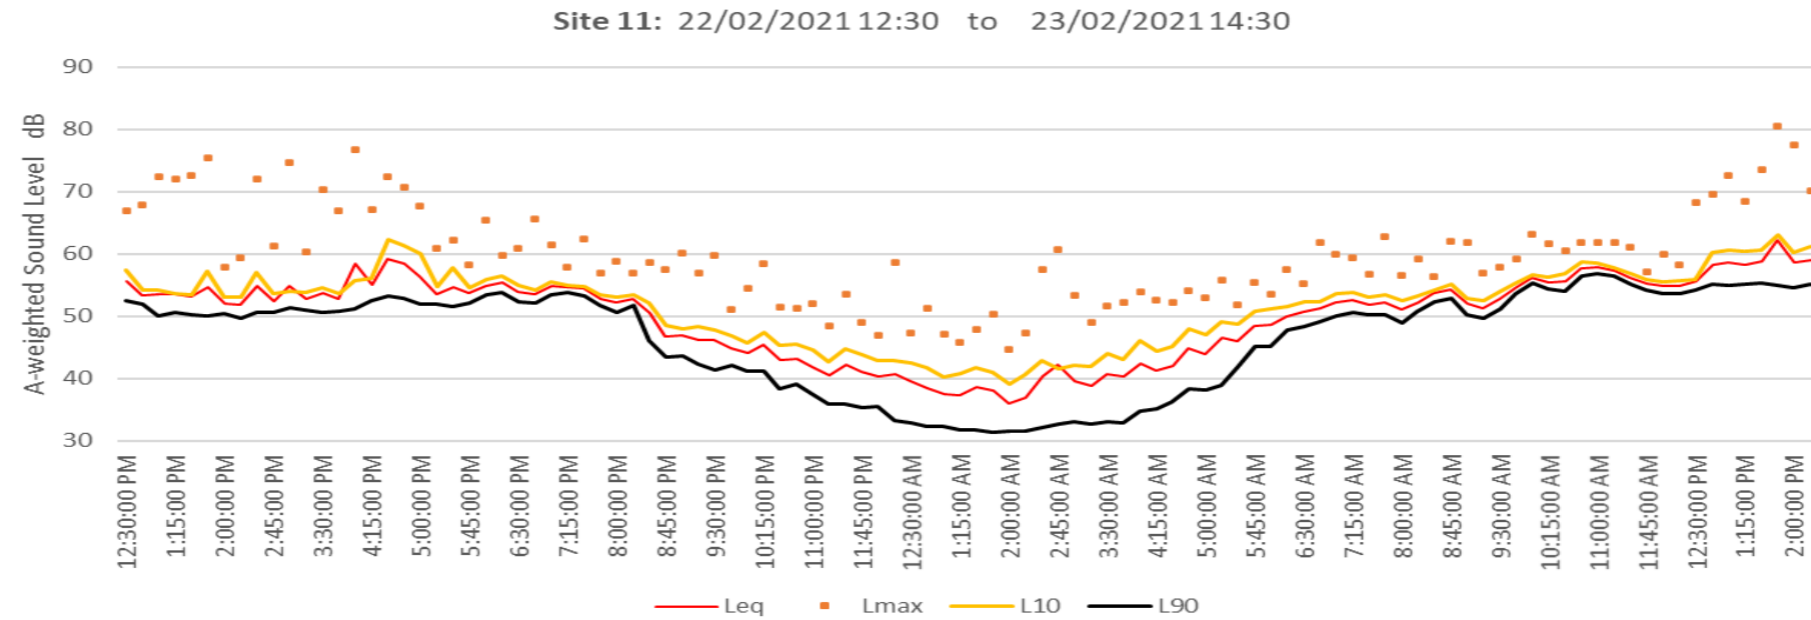


Summary Stats:

		LAeq	LAmax	LA10	LA90
DAY	Max.Day	62.3	80.5	63	56.9
	Min Day	51.1	56.4	52.6	48.9
	Av. Day	55.0	64.9	56.2	52.6
EVENING	Max Evening	54.8	62.4	55.6	53.9
	Min Evening	44.1	51	45.8	41.1
	Av. Evening	49.8	57.9	51.0	47.3
NIGHT	Max Night	48.4	60.2	49.9	45.2
	Min Night	38.3	46.6	40.9	33.4
	Av.Night	42.3	52.3	44.9	37.0


Site 11 - DAY (7am to 7pm)

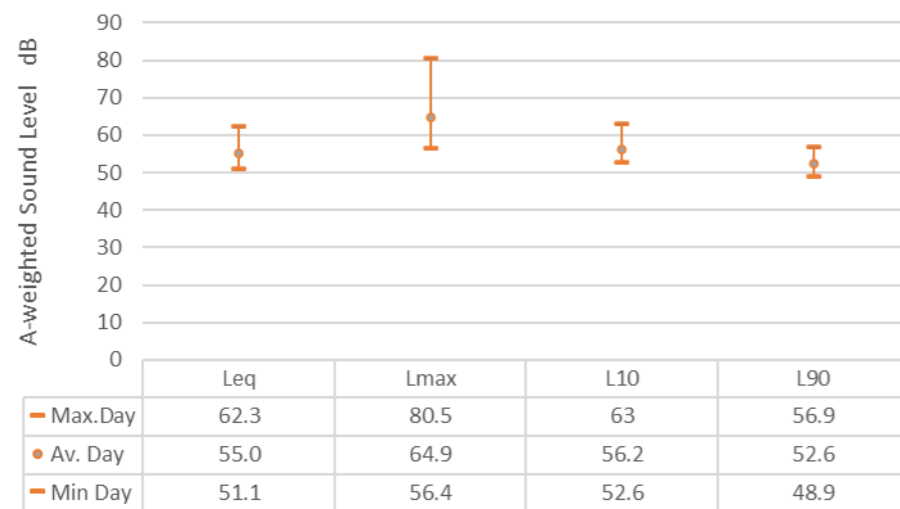


Site 11 - EVENING (7pm to 10pm)

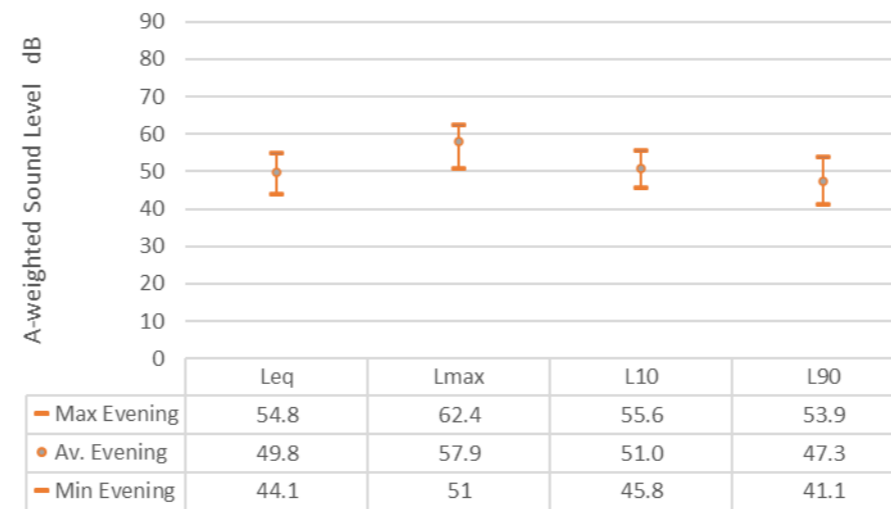

Site 11 - NIGHT (10pm to 7am)

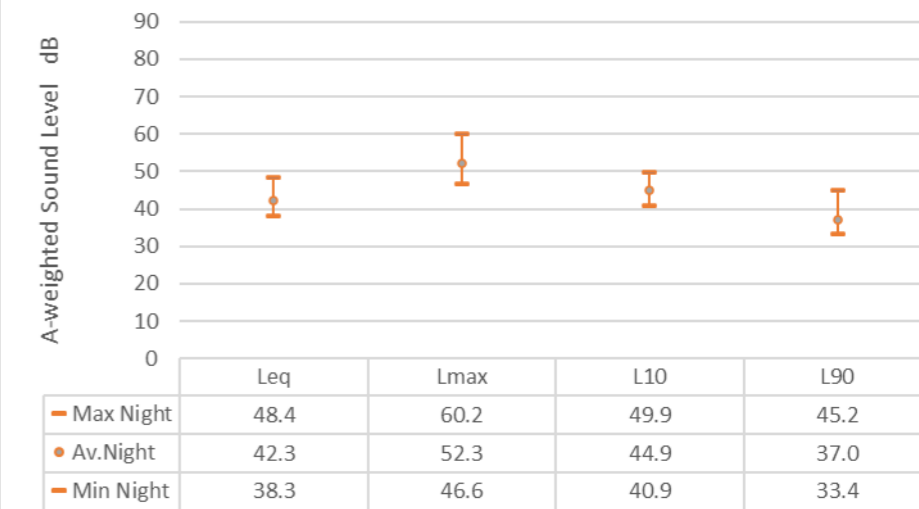


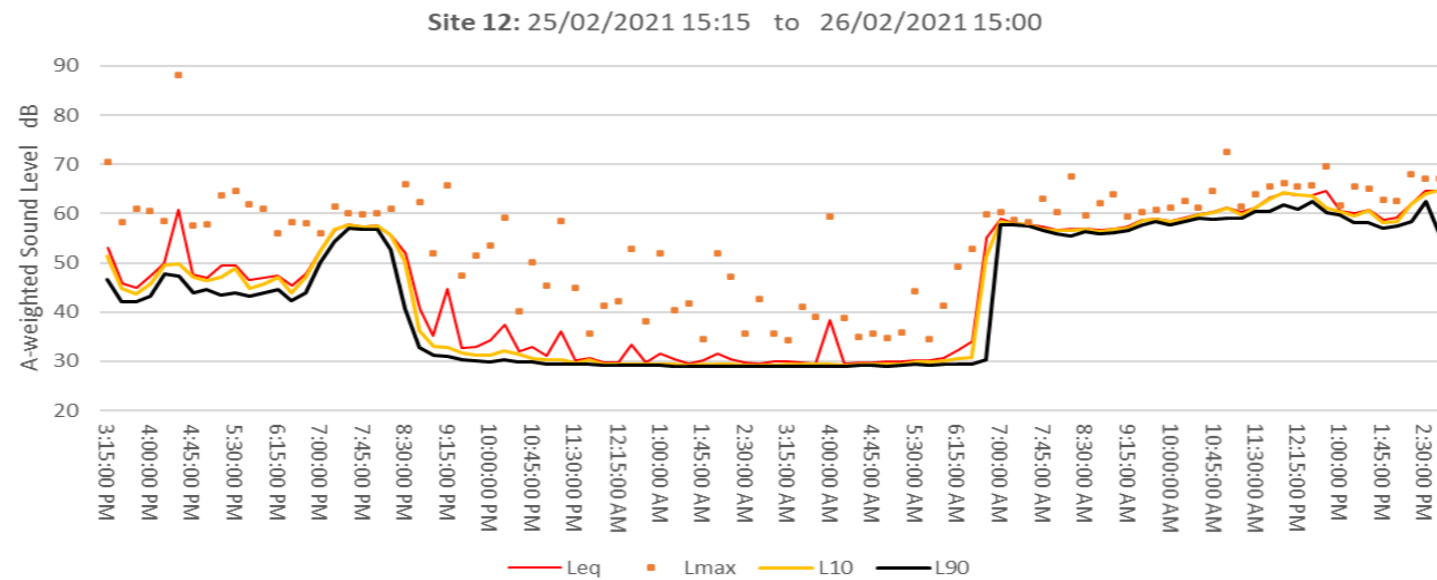


Summary Stats:

		LAeq	LAmax	LA10	LA90
DAY	Max.Day	64.7	88.1	68.3	63.3
	Min Day	45	56	45.6	42.8
	Av. Day	56.4	63.1	57.2	54.5
EVENING	Max Evening	64.7	88.1	68.3	63.3
	Min Evening	45	56	45.6	42.8
	Av. Evening	47.6	58.8	48.8	44.0
NIGHT	Max Night	46.3	59.6	48.5	31.5
	Min Night	29.8	35.0	29.8	29.3
	Av.Night	32.3	45.5	32.4	29.7


Site 12 - DAY (7am to 7pm)

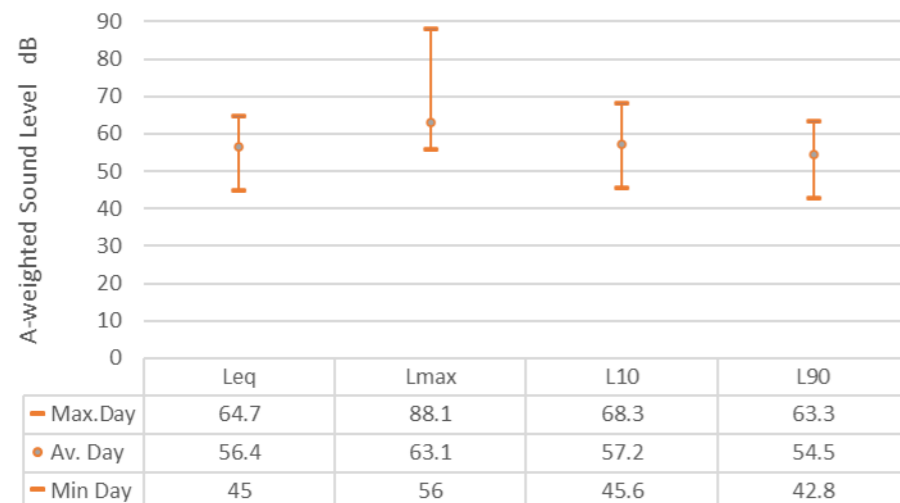

Site 12 - EVENING (7pm to 10pm)

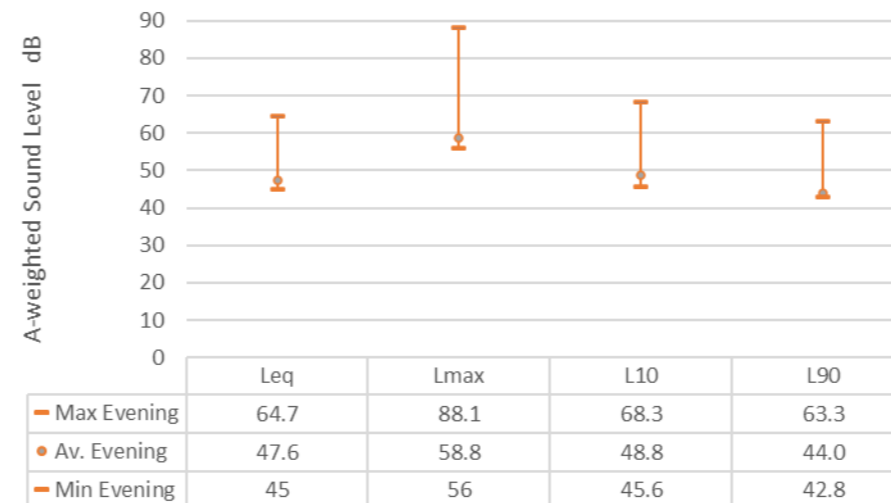


Site 12 - NIGHT (10pm to 7am)

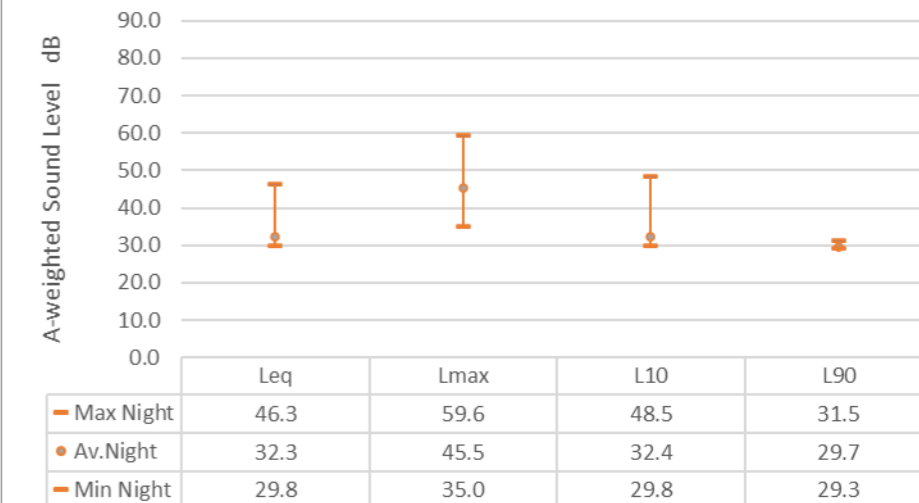

Site Number: 13 27 Bull Avenue, Wainuomata


General Residential

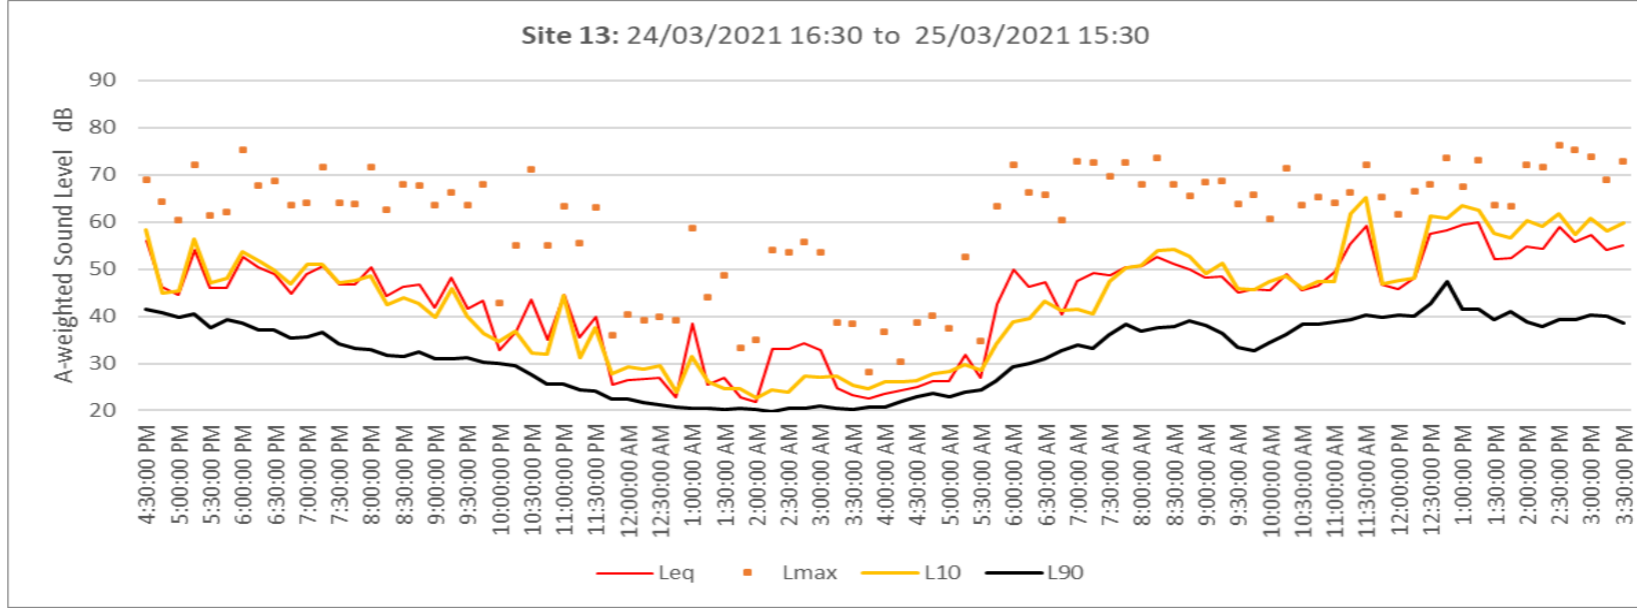


Summary Stats:

		LAeq	LAmaz	LA10	LA90
DAY	Max.Day	60	76.2	65.1	47.3
	Min Day	44.6	60.4	40.6	32.8
	Av. Day	51.0	68.4	52.9	38.6
EVENING	Max Evening	50.7	71.6	51.1	37
	Min Evening	32.8	62.6	39.7	30.9
	Av. Evening	45.0	66.3	46.4	33.5
NIGHT	Max Night	47.3	71.7	43.9	32.0
	Min Night	23.8	35.6	27.3	22.8
	Av.Night	33.9	53.1	32.8	25.7


Site 13 - DAY (7am to 7pm)

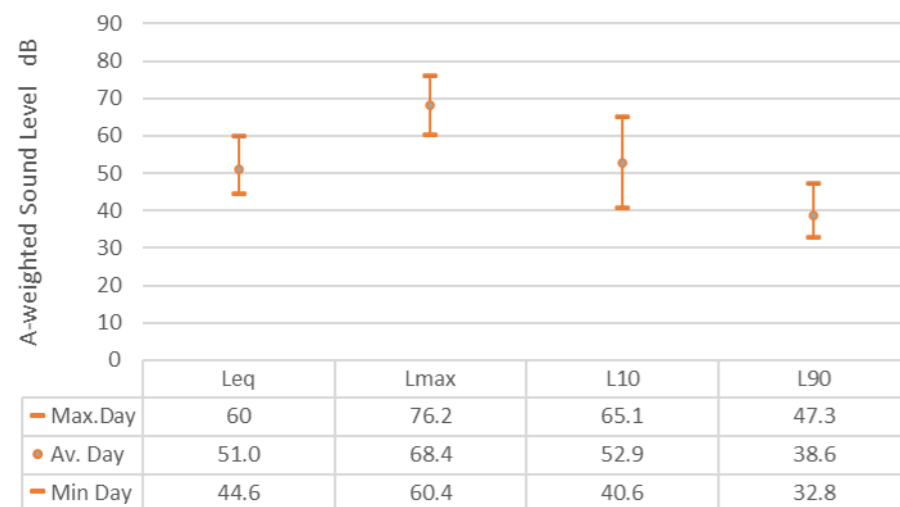


Site 13 - EVENING (7pm to 10pm)

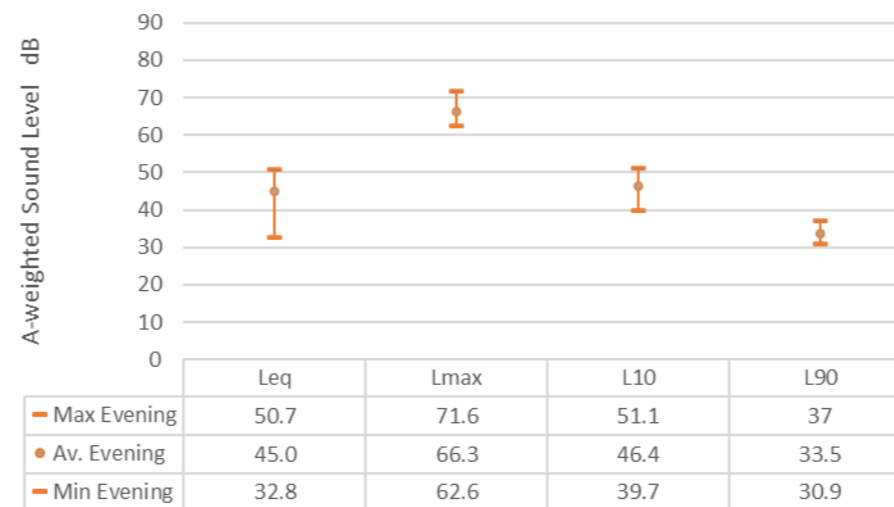

Site 13 - NIGHT (10pm to 7am)

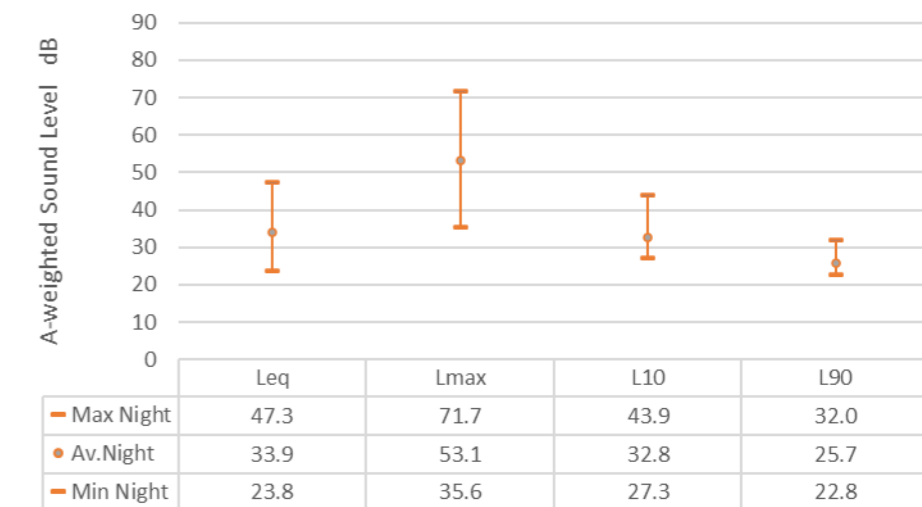


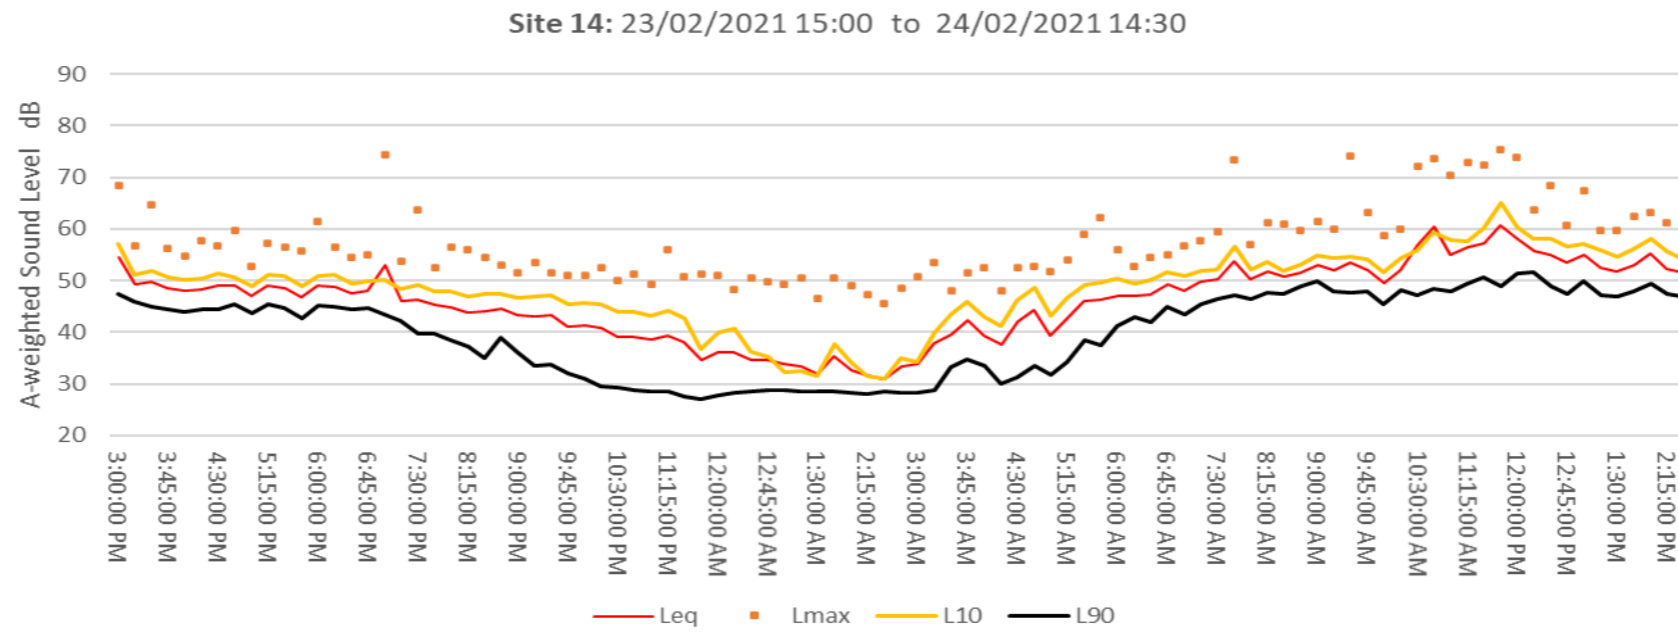


Summary Stats:

		LAeq	LAmax	LA10	LA90
DAY	Max.Day	60.8	75.4	65	51.6
	Min Day	46.9	52.7	48.9	42.7
	Av. Day	51.9	62.3	54.1	46.9
EVENING	Max Evening	46.4	63.6	49.2	42.2
	Min Evening	41.1	50.9	45.3	31
	Av. Evening	43.9	54.0	47.2	36.5
NIGHT	Max Night	45.0	59.1	48.6	37.2
	Min Night	32.7	47.4	33.8	27.4
	Av.Night	38.6	51.5	42.0	30.4


Site 14 - DAY (7am to 7pm)

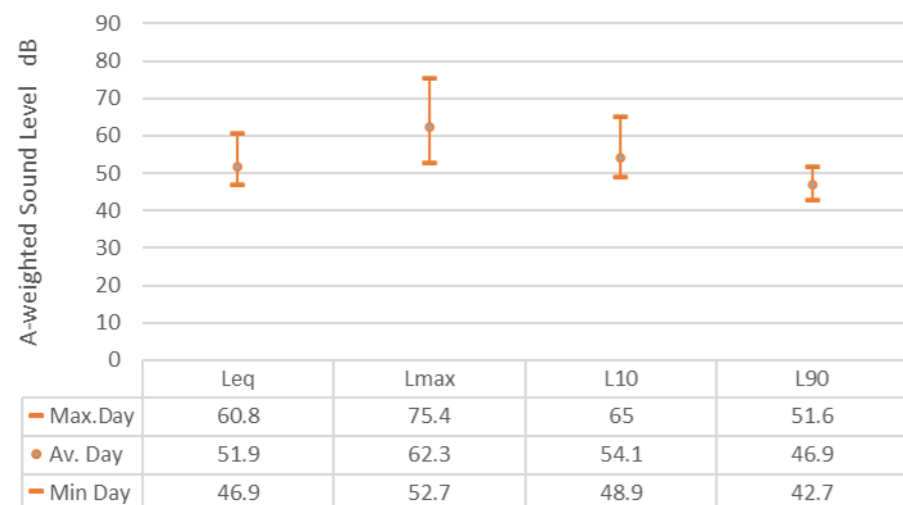


Site 14 - EVENING (7pm to 10pm)

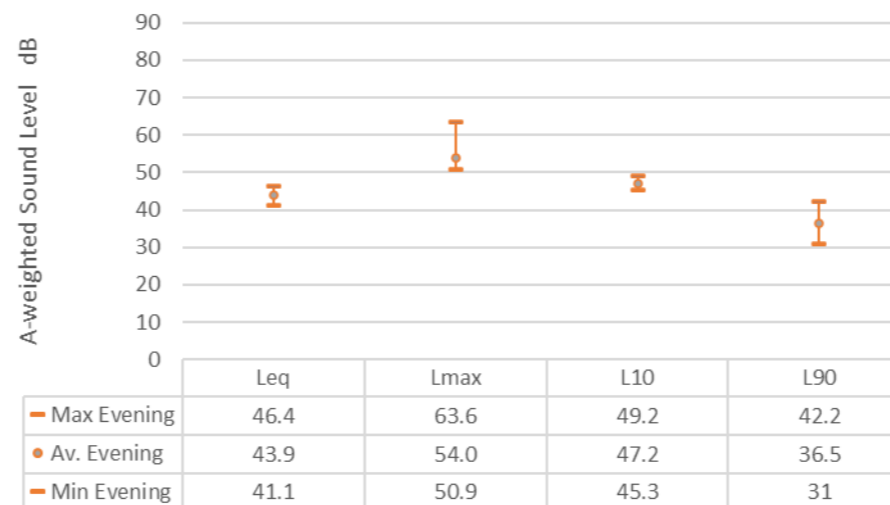

Site 14 - NIGHT (10pm to 7am)

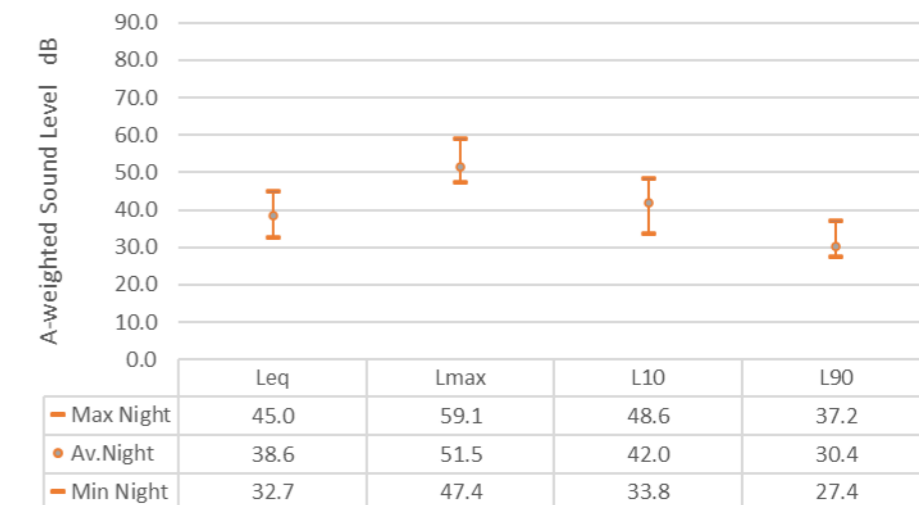


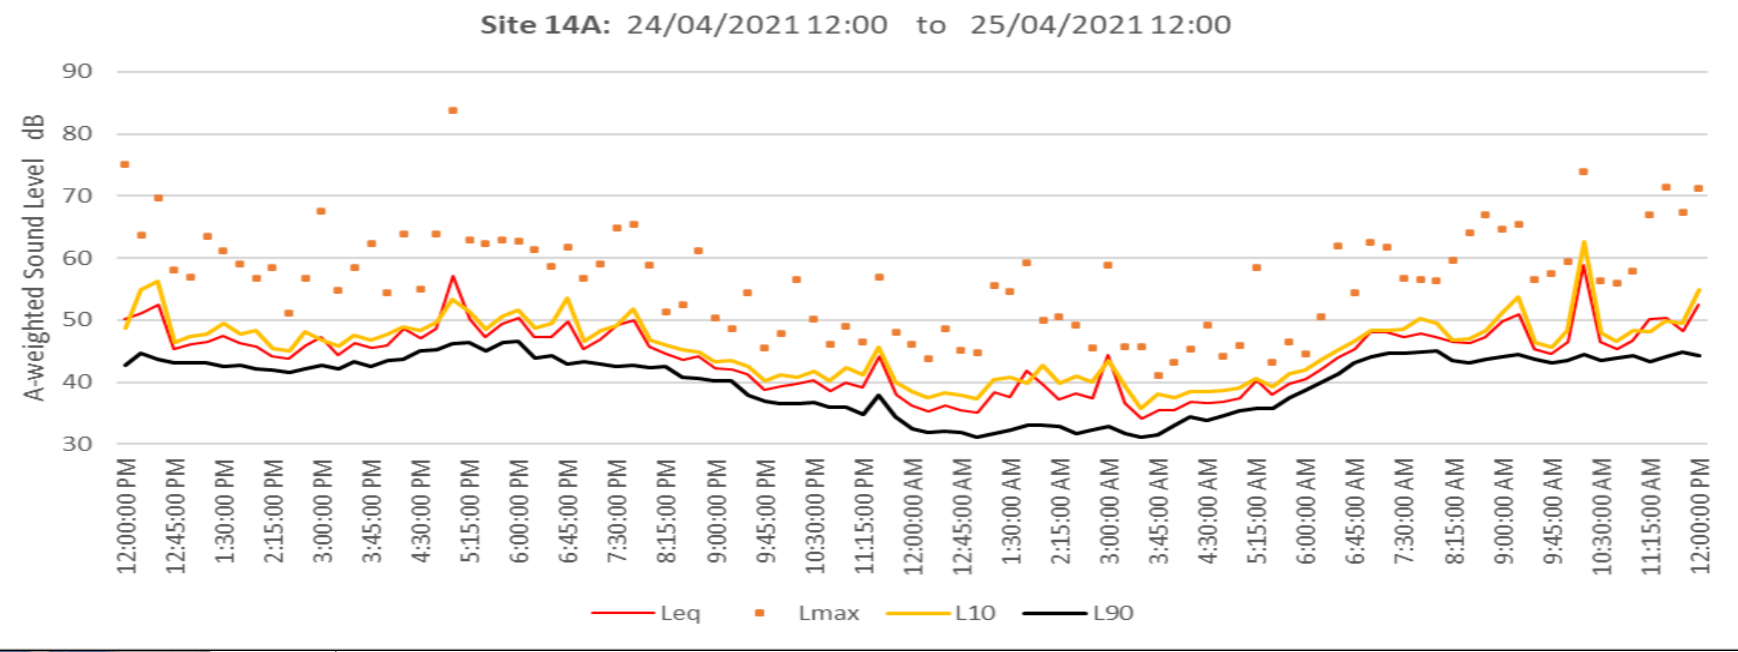


Summary Stats:

		LAeq	LAmax	LA10	LA90
DAY	Max.Day	58.9	83.8	62.7	46.5
	Min Day	37.9	45.5	40	34.4
	Av. Day	47.9	61.9	49.2	43.8
EVENING	Max Evening	49.9	65.5	51.8	42.9
	Min Evening	38.7	45.5	40.1	36.6
	Av. Evening	43.9	55.0	45.2	40.5
NIGHT	Max Night	44.8	59.5	46.1	40.5
	Min Night	36.0	43.6	37.9	32.8
	Av.Night	39.1	49.7	40.9	35.1


Site 14A - DAY (7am to 7pm)

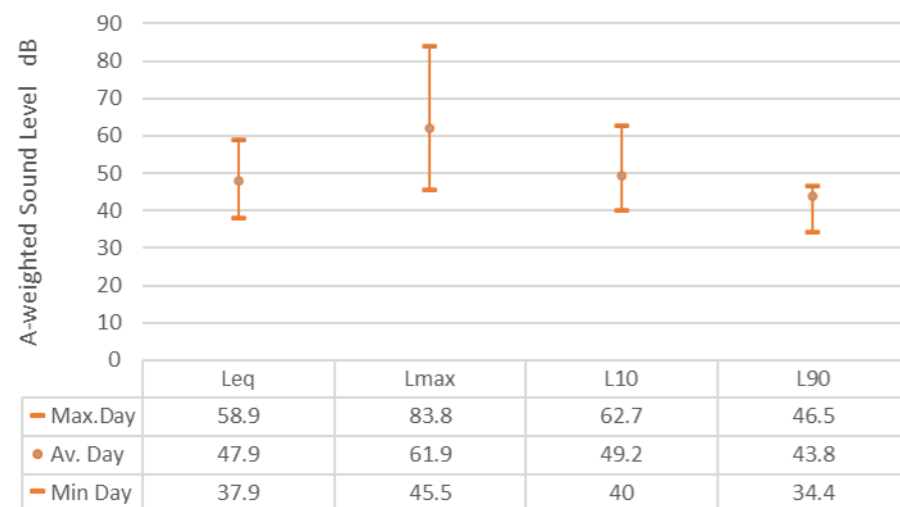


Site 14A - EVENING (7pm to 10pm)

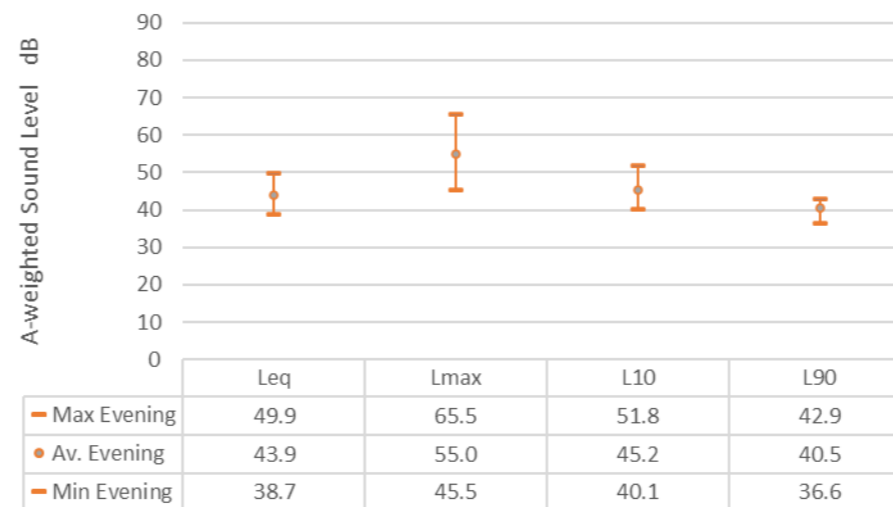




Site 14A - NIGHT (10pm to 7am)

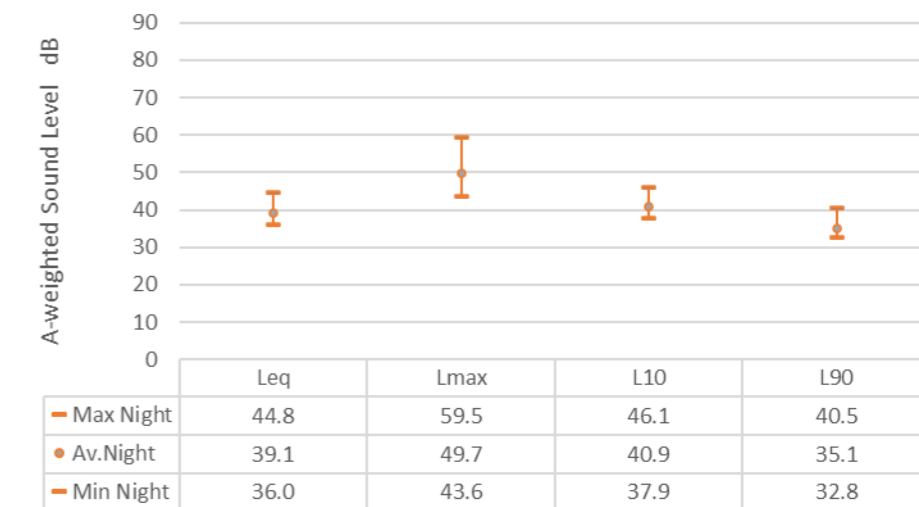

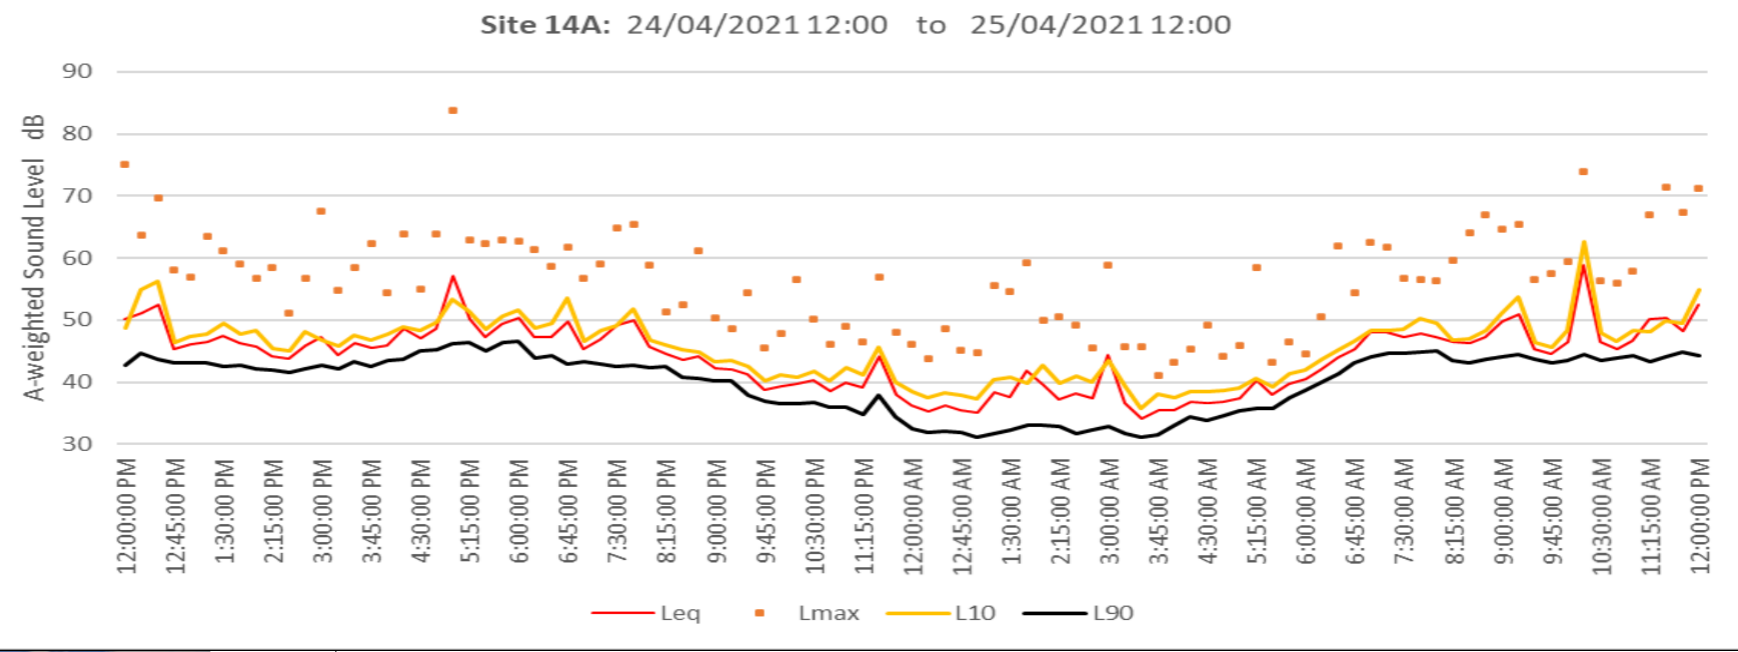

Summary Stats:



		LAeq	LAmx	LA10	LA90
DAY	Max.Day	58.9	83.8	62.7	46.5
	Min Day	37.9	45.5	40	34.4
	Av. Day	47.9	61.9	49.2	43.8
EVENING	Max Evening	49.9	65.5	51.8	42.9
	Min Evening	38.7	45.5	40.1	36.6
	Av. Evening	43.9	55.0	45.2	40.5
NIGHT	Max Night	44.8	59.5	46.1	40.5
	Min Night	36.0	43.6	37.9	32.8
	Av.Night	39.1	49.7	40.9	35.1

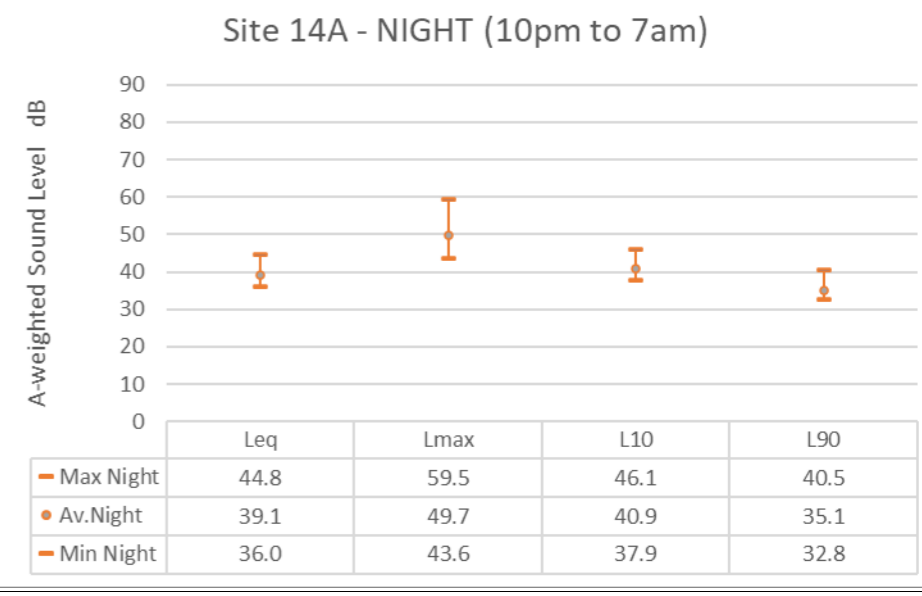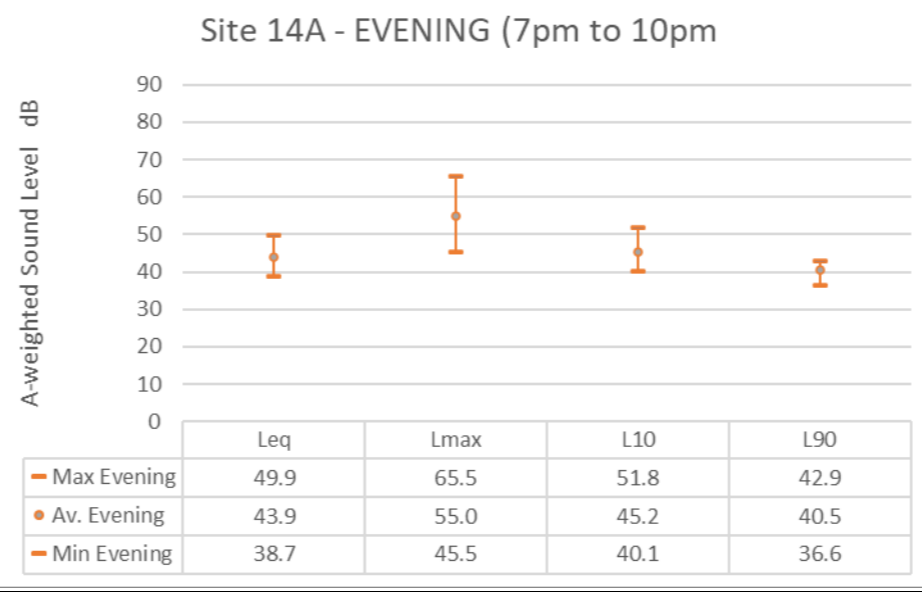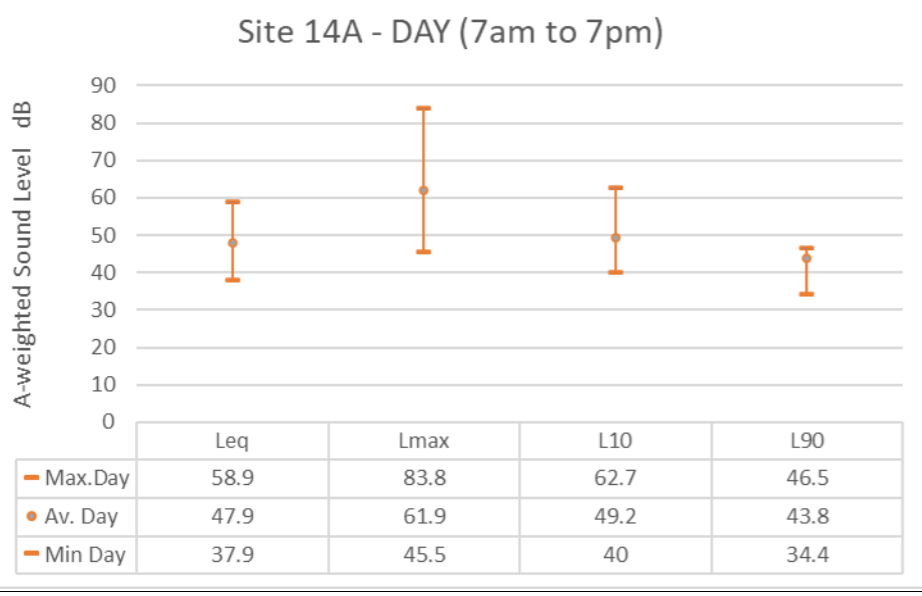

Site Number: 14B

86 Cambridge Terrace, Waterloo


General Residential

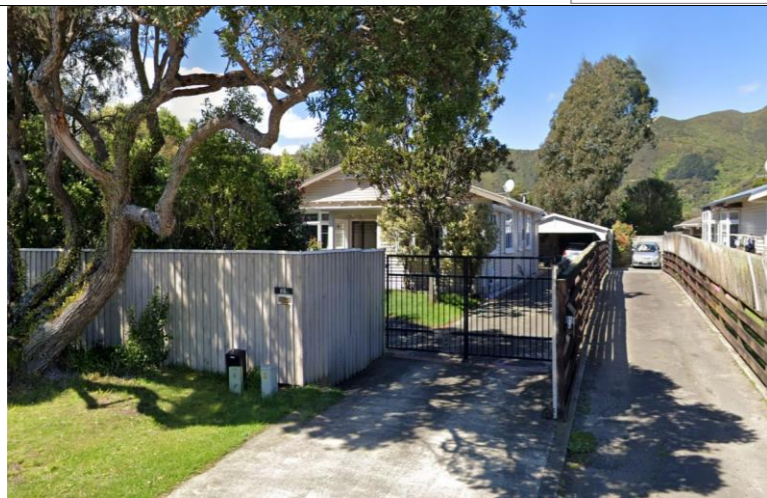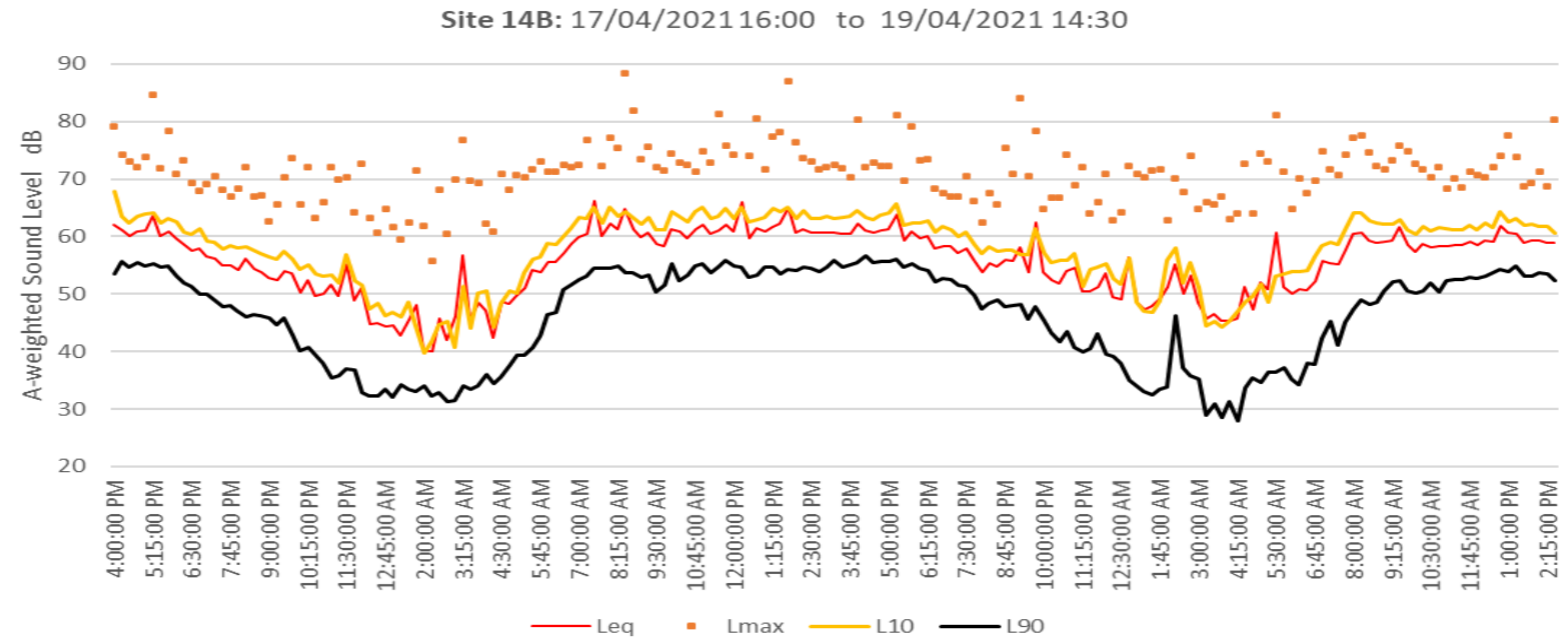


Summary Stats:

		LAeq	LAmx	LA10	LA90
DAY	Max.Day	66.2	92	67.8	56.7
	Min Day	55.1	66.9	58.4	41.2
	Av. Day	60.2	74.2	62.7	53.0
EVENING	Max Evening	62.4	84	61.4	51.6
	Min Evening	50.3	62.4	54.2	40.1
	Av. Evening	55.1	69.2	57.8	47.1
NIGHT	Max Night	57.9	77.7	60.2	48.1
	Min Night	44.5	59.5	45.6	31.7
	Av.Night	50.6	68.3	52.5	38.0


Site 14B - DAY (7am to 7pm)

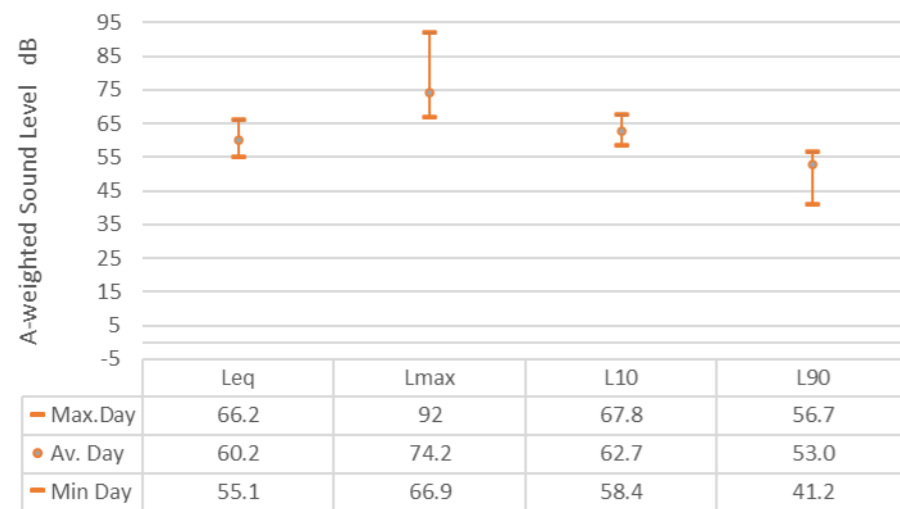


Site 14B - EVENING (7pm to 10pm)

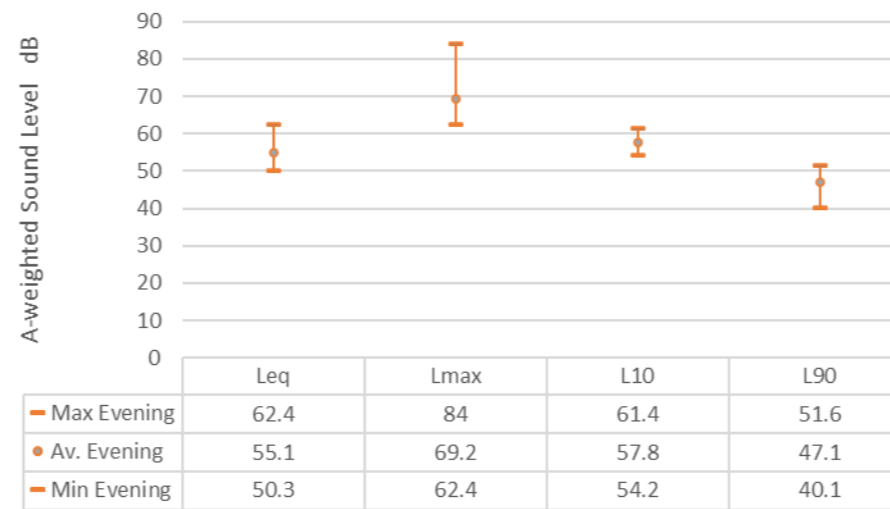

Site 14B - NIGHT (10pm to 7am)

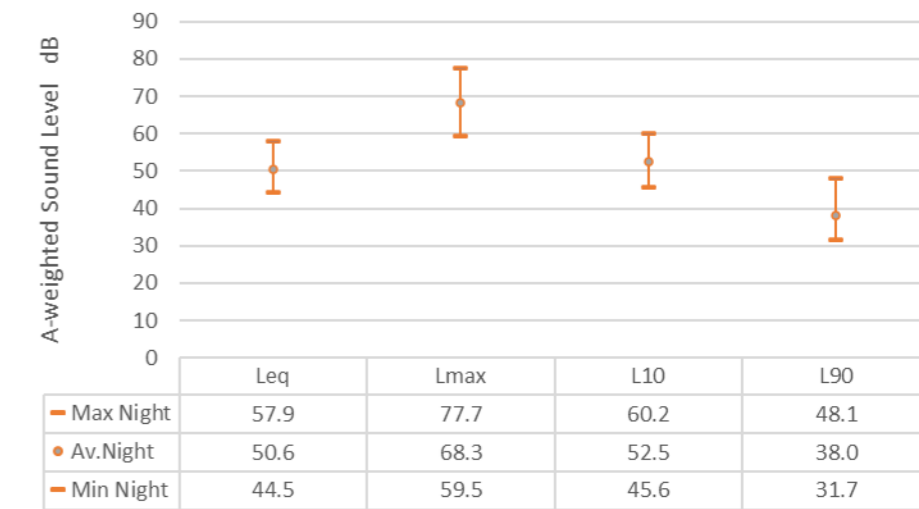


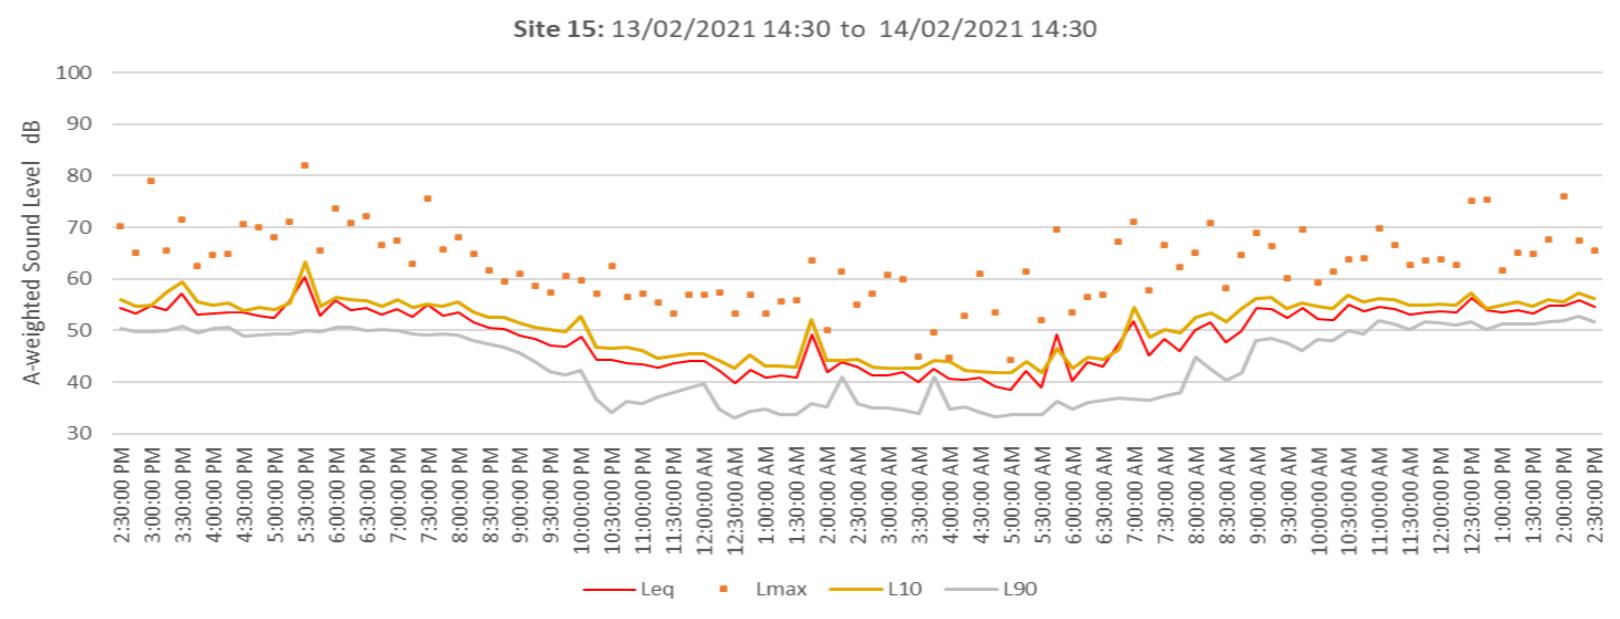


Summary Stats:

		LAeq	LAmax	LA10	LA90
DAY	Max.Day	60.3	82.1	63.2	52.7
	Min Day	45.2	57.9	48.6	36.5
	Av. Day	53.3	67.2	55.1	48.5
EVENING	Max Evening	55	75.5	56	50
	Min Evening	46.8	57.4	49.8	41.4
	Av. Evening	50.8	63.3	53.0	46.5
NIGHT	Max Night	46.75	66	49.5	39.9
	Min Night	40.6	48.7	43.2	33.55
	Av.Night	43.0	56.4	44.9	36.0


Site 15 - DAY (7am to 7pm)

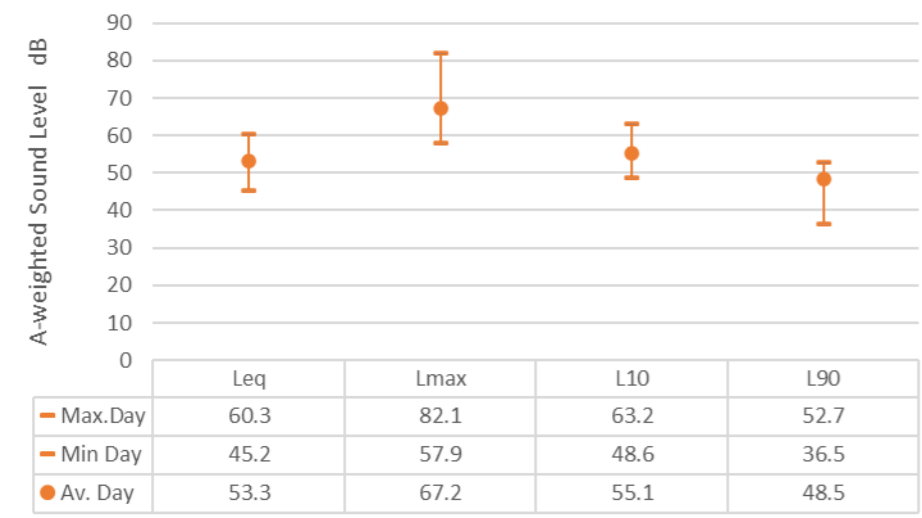

Site 15 - EVENING (7pm to 10pm)

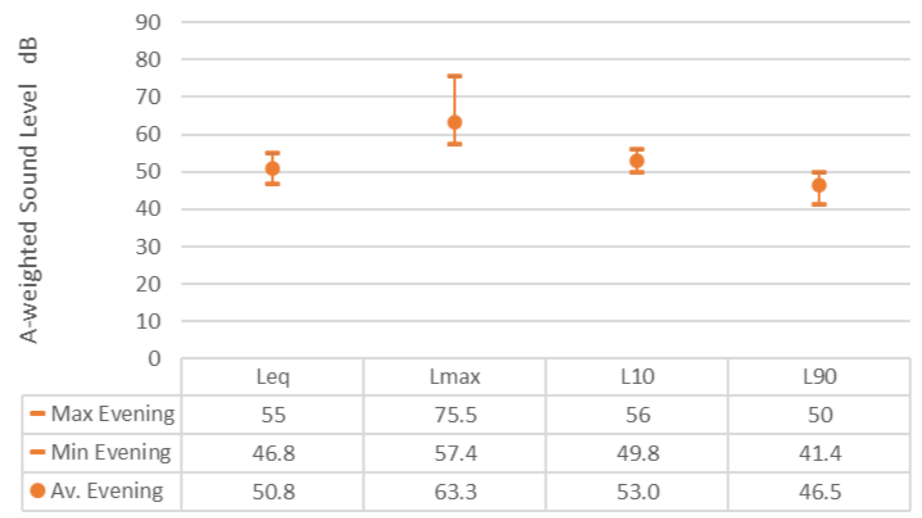


Site 15 - NIGHT (10pm to 7am)

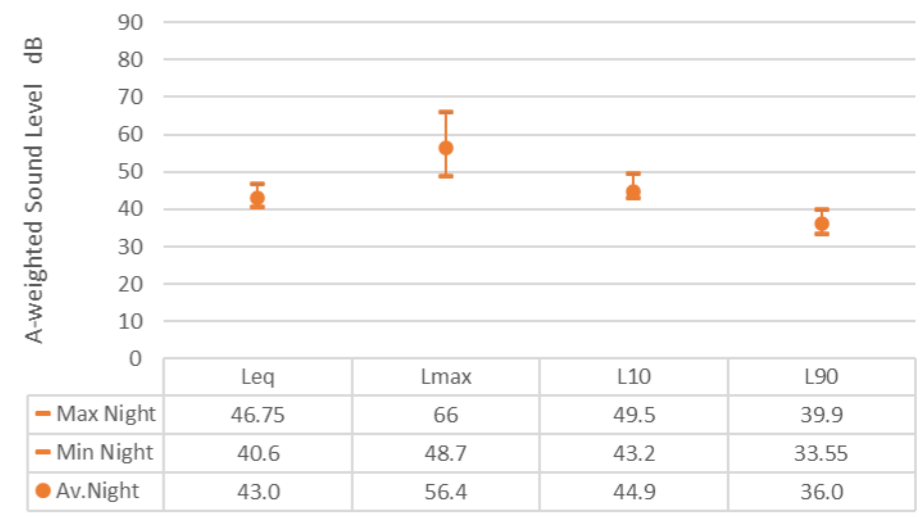

Site Number: 16

Upper Moores Valley Road


Rural

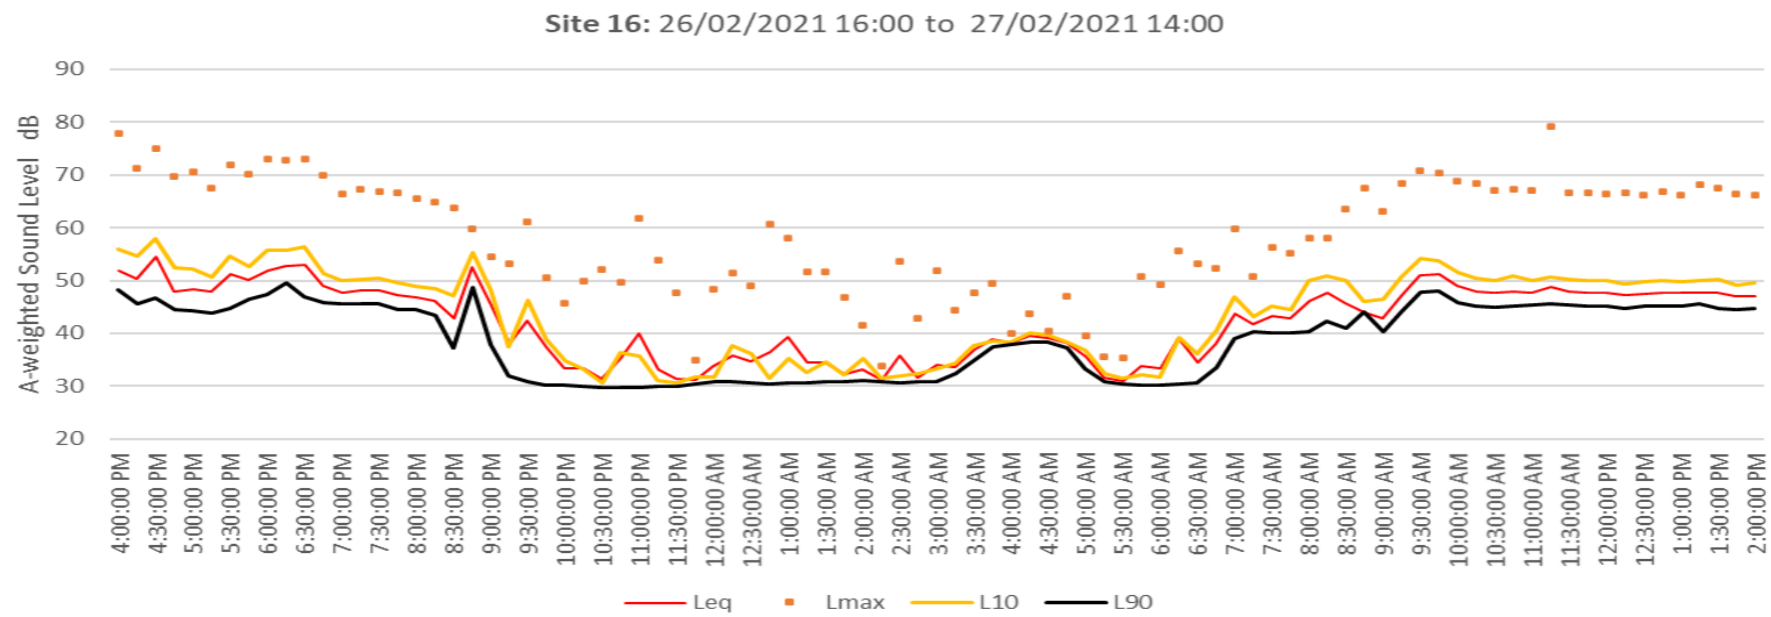


Summary Stats:

		LAeq	LAmax	LA10	LA90
DAY	Max.Day	54.6	79.1	58	49.5
	Min Day	41.7	50.7	43.1	38.9
	Av. Day	48.0	67.2	50.8	44.6
EVENING	Max Evening	52.6	67.3	55.2	48.6
	Min Evening	33.4	45.8	34.8	30.2
	Av. Evening	44.0	60.0	46.3	39.2
NIGHT	Max Night	39.8	61.2	38.5	34.4
	Min Night	31.1	34.5	31.1	30.0
	Av.Night	34.5	48.7	33.9	31.1


Site 16 - DAY (7am to 7pm)

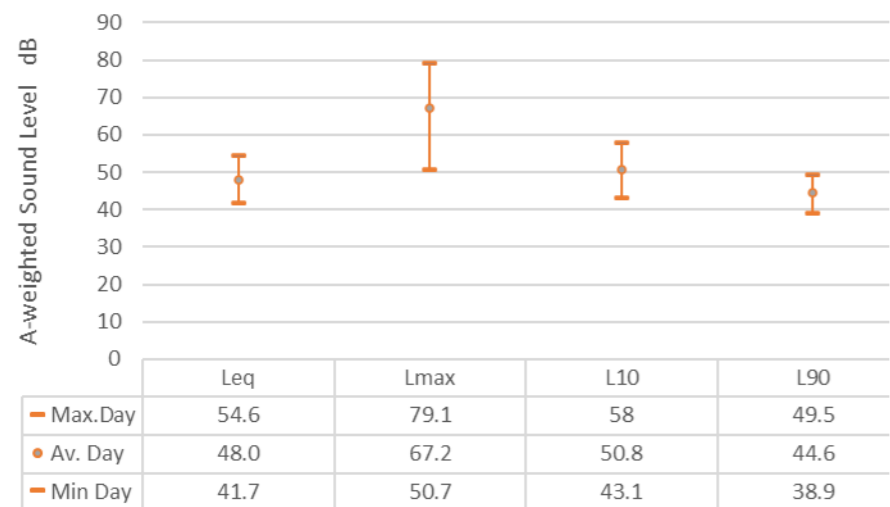

Site 16 - EVENING (7pm to 10pm)


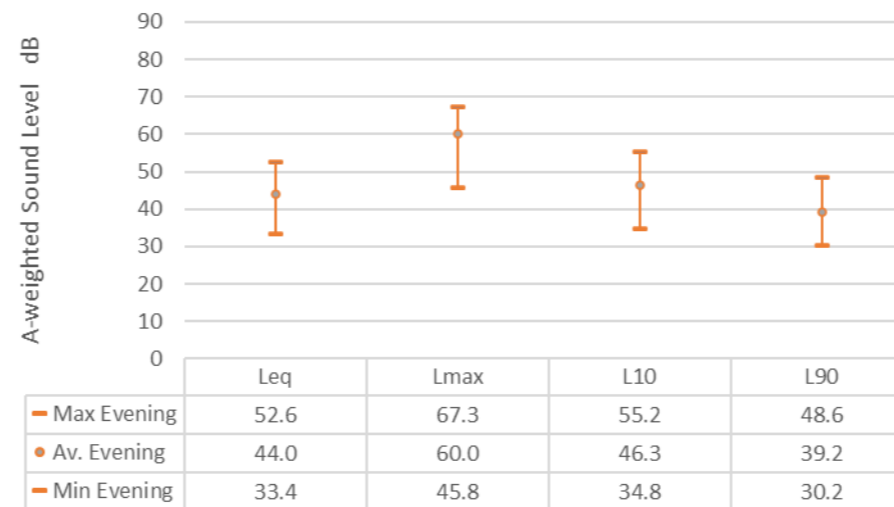


Site 16 - NIGHT (10pm to 7am)

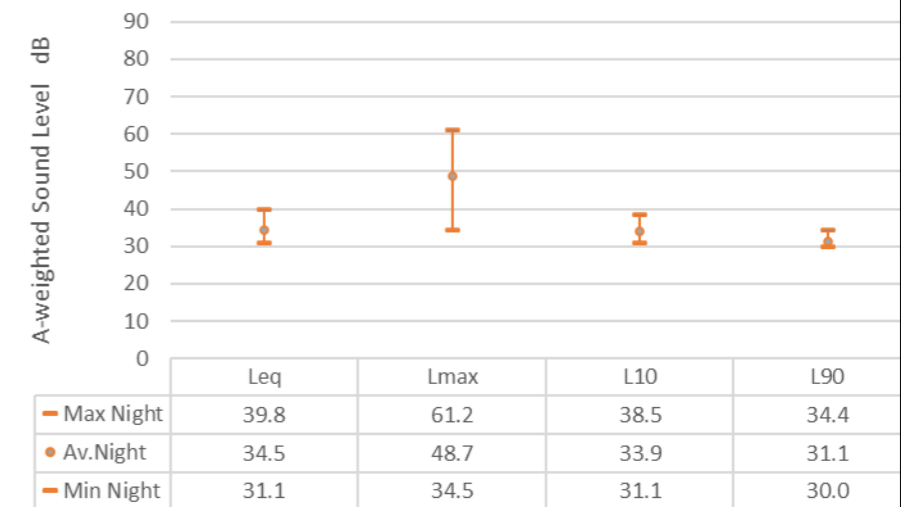

Site Number: 17 Level 1, 21-23 Andrews Avenue, Central Hutt


CBD

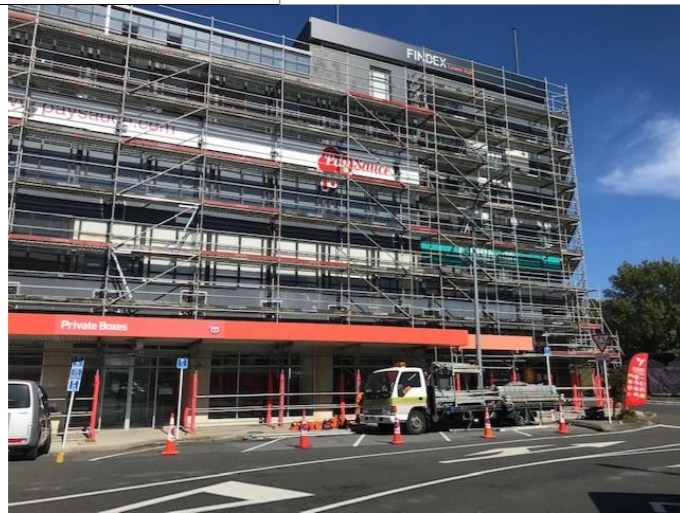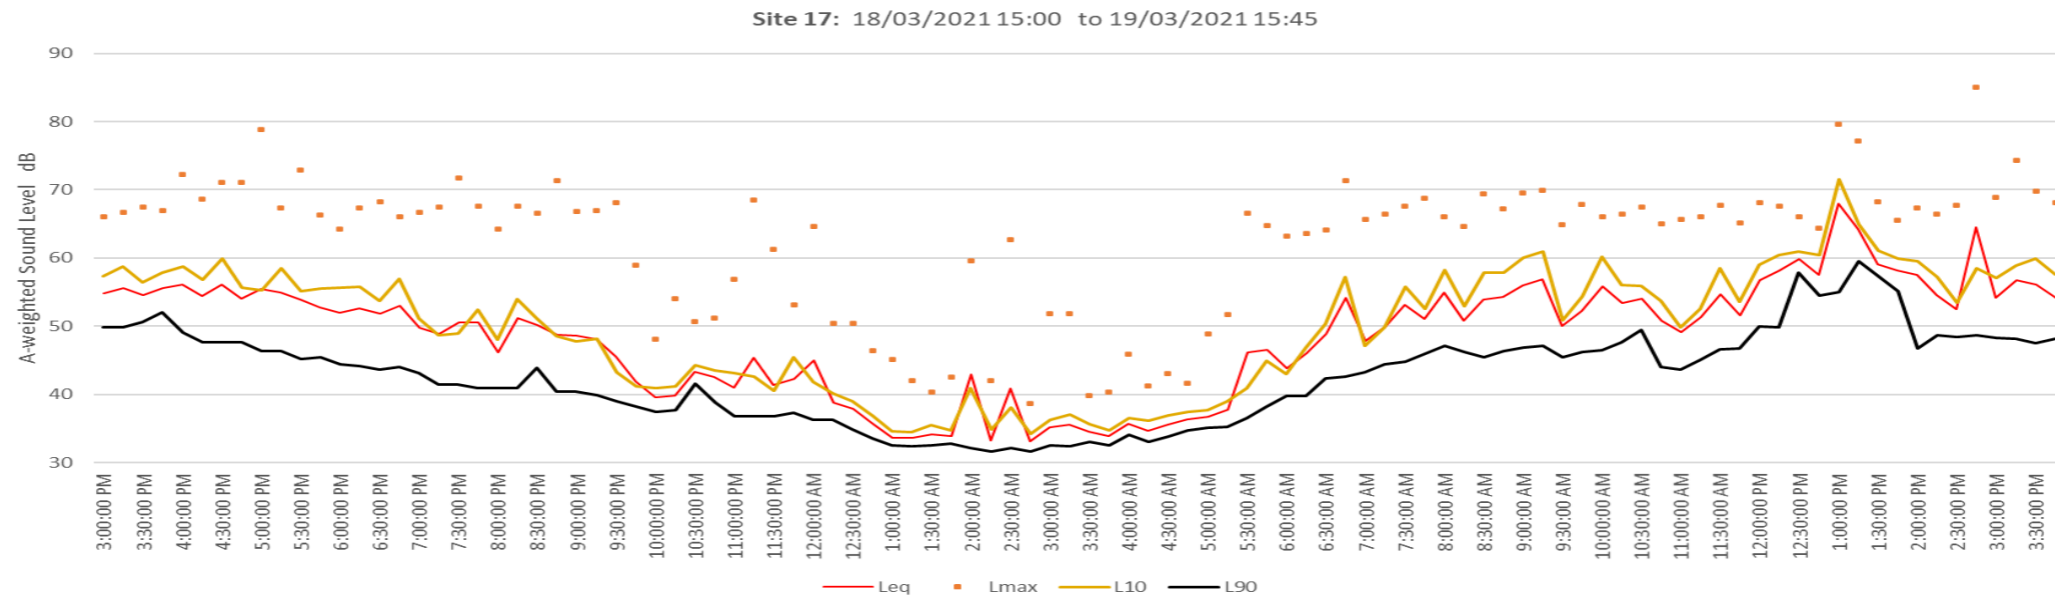

Summary Stats:


		LAeq	LAmax	LA10	LA90
DAY	Max.Day	68	85.1	71.5	59.6
	Min Day	47.9	64.2	47.1	43.1
	Av. Day	54.8	68.5	57	47.9
EVENING	Max Evening	51.2	71.8	54	43.9
	Min Evening	39.6	48.1	40.9	37.5
	Av. Evening	47.7	65.6	48	40.6
NIGHT	Max Night	49.8	70	51.3	42.1
	Min Night	36.5	44.7	37.4	34.2
	Av.Night	40.5	53.9	41	36.4

Site 17 - DAY (7am to 7pm)

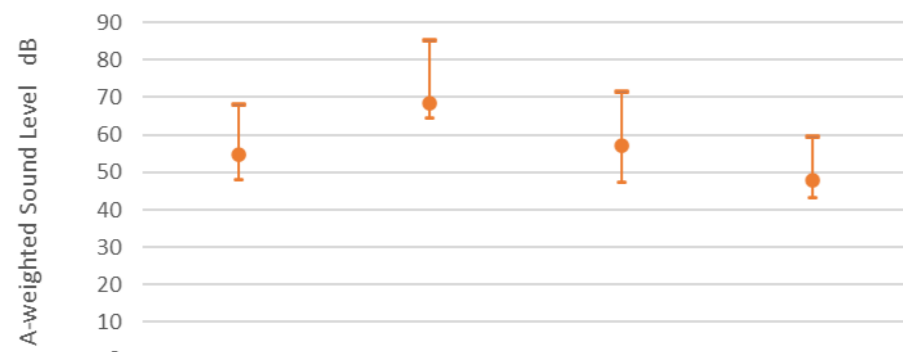

	Leq	Lmax	L10	L90
Max.Day	68	85.1	71.5	59.6
Min Day	47.9	64.2	47.1	43.1
Av. Day	54.8	68.5	57	47.9

Site 17 - EVENING (7pm to 10pm)

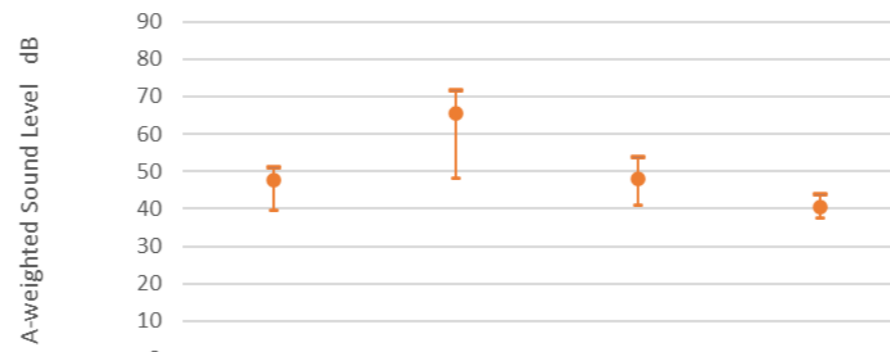

	Leq	Lmax	L10	L90
Max Evening	51.2	71.8	54	43.9
Min Evening	39.6	48.1	40.9	37.5
Av. Evening	47.7	65.6	48	40.6

Site 17 - NIGHT (10pm to 7am)





	Leq	Lmax	L10	L90
Max Night	49.8	70	51.3	42.1
Min Night	36.5	44.7	37.4	34.2
Av.Night	40.5	53.9	41	36.4

Site Number: 18


Ava Park, 10m from Rail Designation Boundary

Rail Corridor

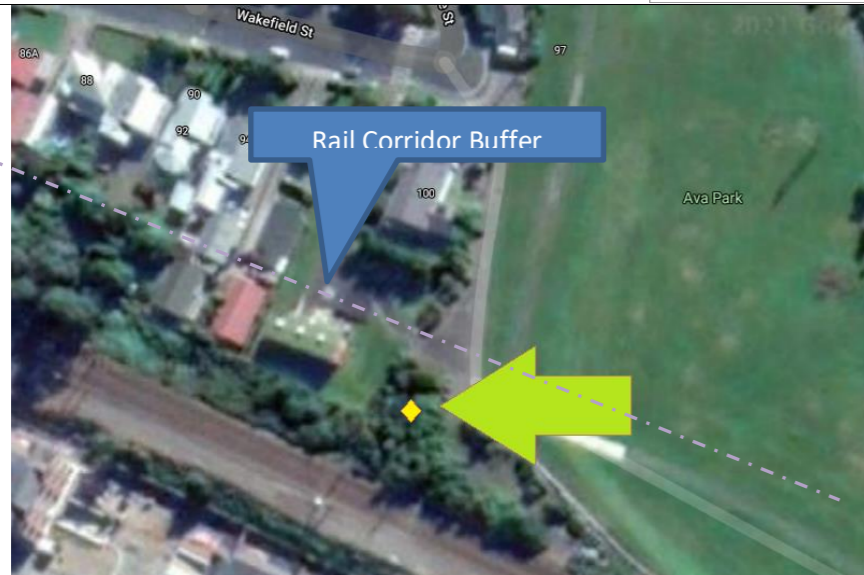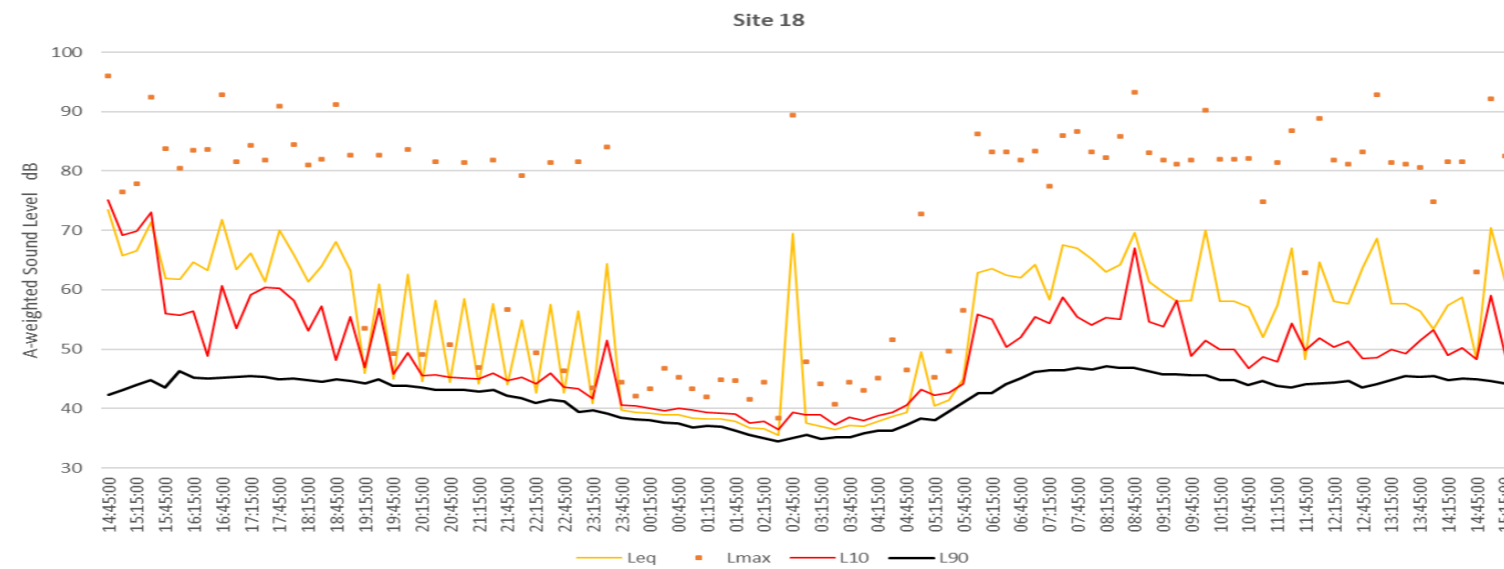


Summary Stats:


		LAeq	LAmax	LA10	LA90
DAY	Max.Day	73.5	93.3	75.1	56.5
	Min Day	48.3	62.8	46.8	41.1
	Av. Day	62.3	83.0	54.7	45.4
EVENING	Max Evening	62.6	83.7	56.8	44.9
	Min Evening	44	46.9	44.7	41.8
	Av. Evening	51.7	66.4	46.8	43.3
NIGHT	Max Night	66.1	86.6	52.6	44.4
	Min Night	37.6	40.95	38.55	36.4
	Av. Night	46.3	57.4	43.0	38.9

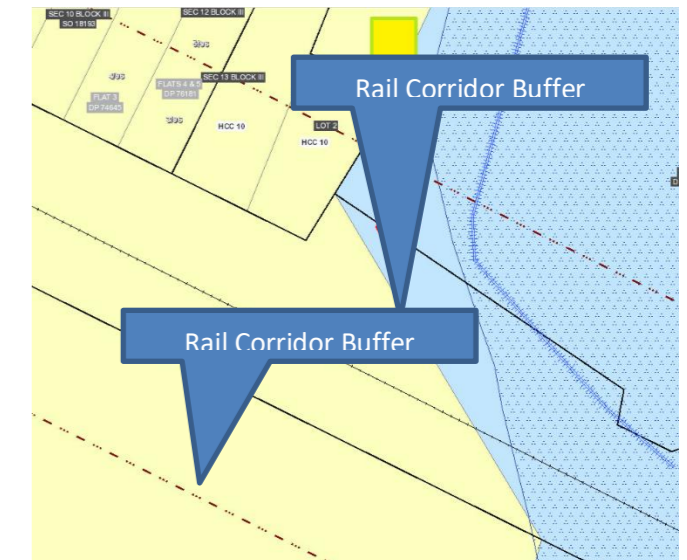


Site 18 - DAY (7am to 7pm)

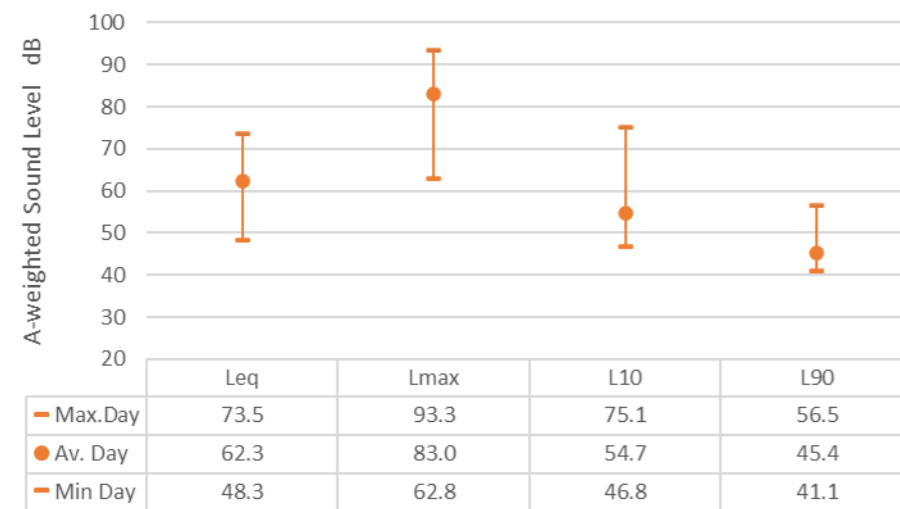

Site 18 - EVENING (7pm to 10pm)

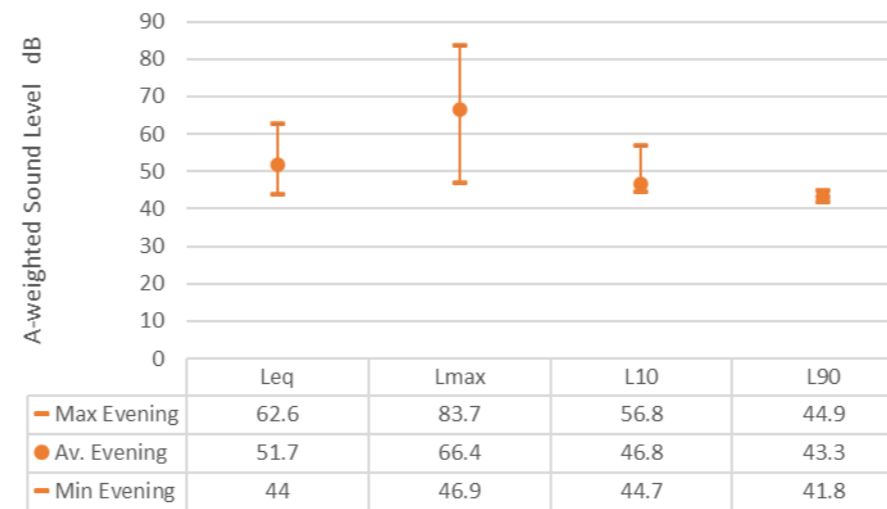


Site 18 - NIGHT (10pm to 7am)

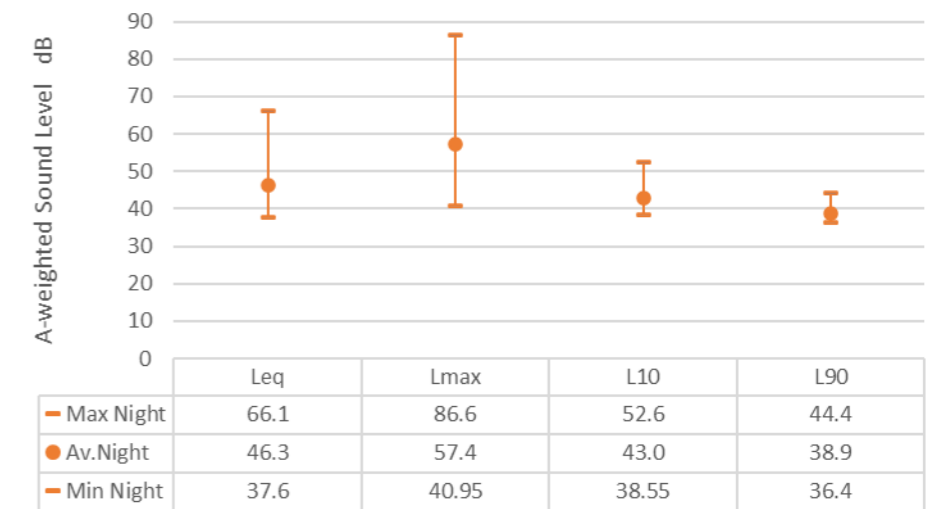

Site Number: 19


3/86 North Street, Ava, Petone. Located Just Outside "Rail Corridor Buffer Overlay" 40m from Rail Designation Boundary

Rail Corridor

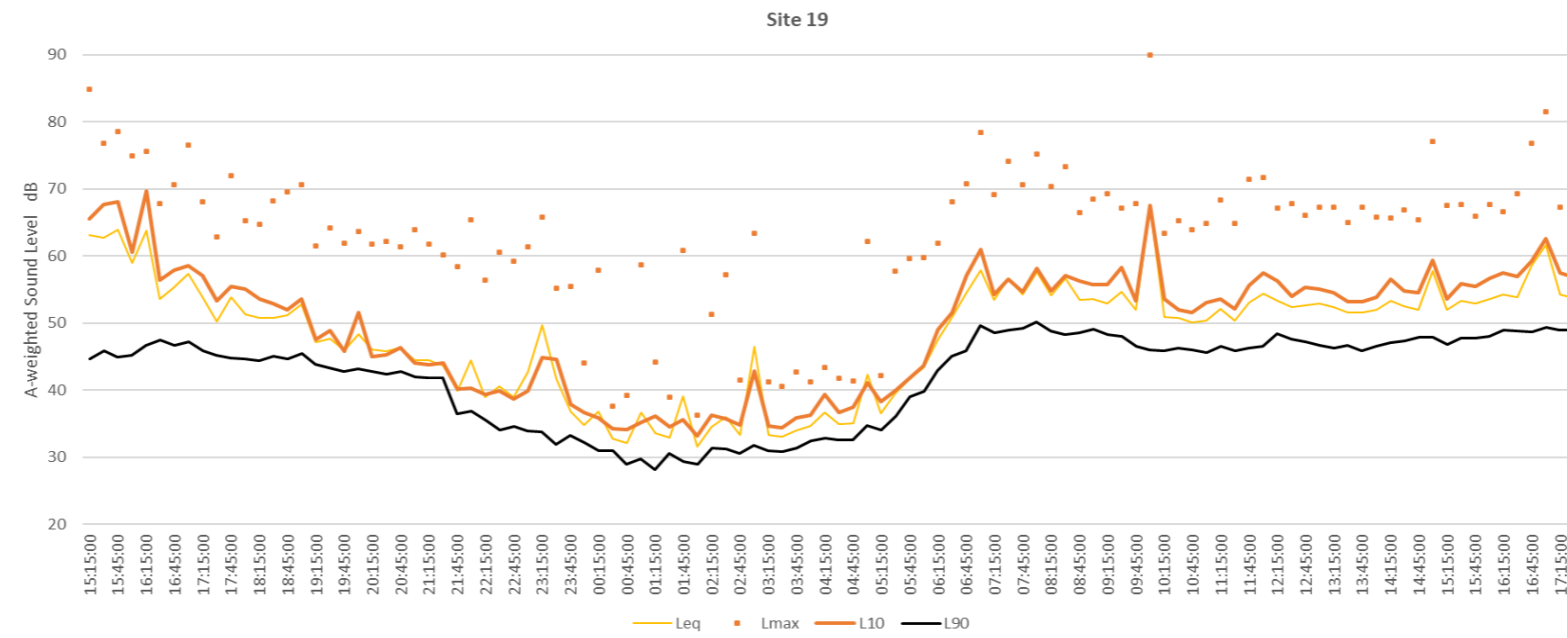


Summary stats


		LAeq	LAmx	LA10	LA90
DAY	Max.Day	67.2	89.9	67.5	50.2
	Min Day	31.5	36.2	33.2	28.1
	Av. Day	44.1	58.4	45.0	38.5
EVENING	Max Evening	54.4	71.7	57.4	48.4
	Min Evening	51.5	65	53.1	45.9
	Av. Evening	52.6	67.4	55.0	46.9
NIGHT	Max Night	58.6	73.2	63.0	48.0
	Min Night	45.4	60.9	46.45	41.15
	Av. Night	52.1	67.4	54.0	45.7

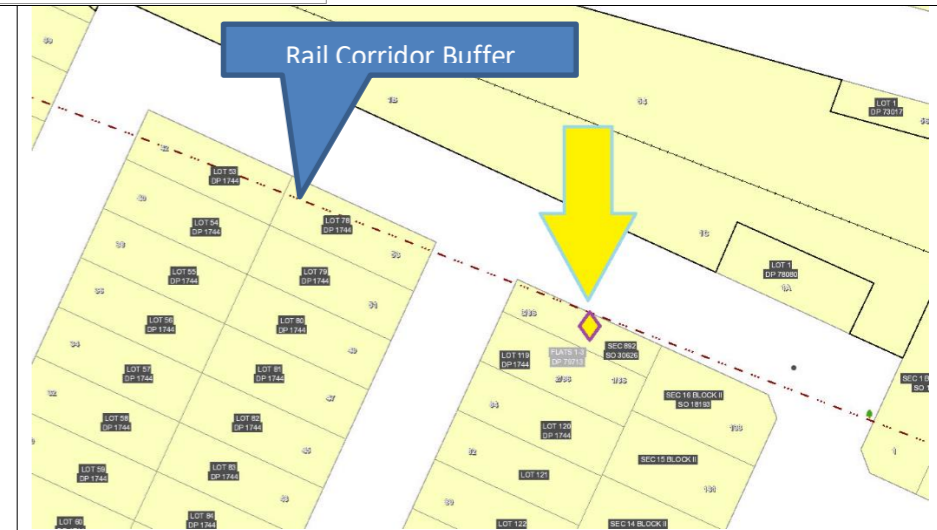


Site 19 - DAY (7am to 7pm)

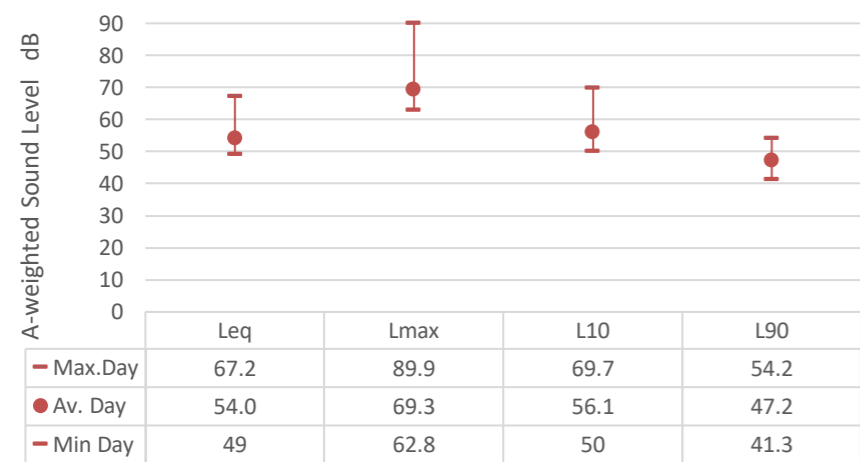

Site 19 - EVENING (7pm to 10pm)

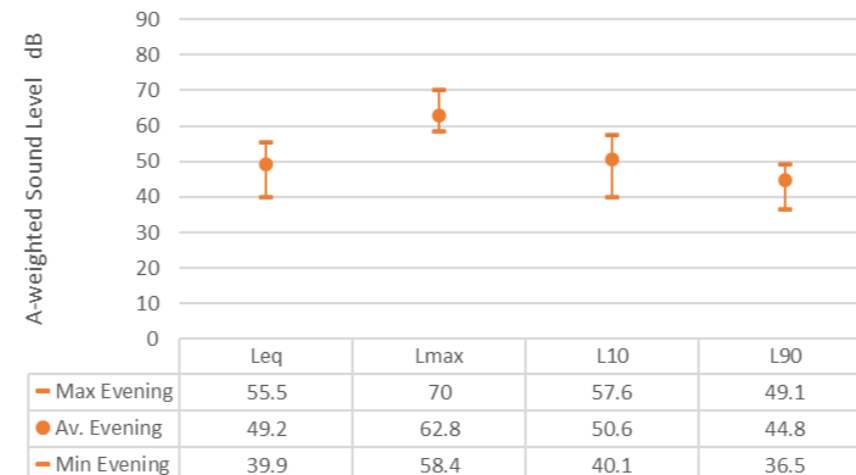

Site 19 - NIGHT (10pm to 7am)

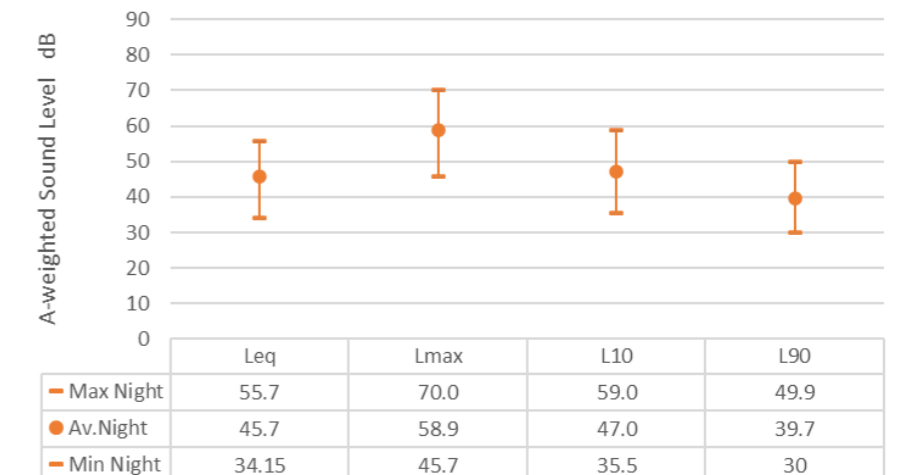

APPENDIX B

List of Council Investigations Into 'Unreasonable' Noise 2010 to 2021

Type of Noise, Location and Outcome Comments

Date	Noise Source Address	Type of Noise	Outcome
Jan-20	Port Road/Meachen Street, Barnes Street Seaview	Sprint Car Event	Compliant with Temp Activities Noise Rule
Jan-20	Williams Park, 611B Marine Drive Days Bay	Music concert	Compliant with Resource Consent Noise Limit
Jan-20	Hutt Recreation Ground, 135 Woburn Road Hutt Central	Music Concert	Compliant with Resource Consent Noise Limit
Dec-19	Hillary Court, Naenae	Open air movie	Non-compliant with Temp Activity Noise Rule - advice given prior to next event
Jul-19	State Highway 2, Belmont	Night Road works	Non-compliant - BPO adopted
Nov-18	Kaitangata Crescent Kelson	Roosters	Non-compliant - rooster numbers reduced
Aug-17	Brunswick Street Hutt Central	Compressor	Non-compliant - advised complainant who would work with VTNZ - did not wish further action from Council
Aug-17	Hutt Road Petone	Generator	Non compliant - remedial works undertaken and BPO adopted
Aug-17	Jackson Street Petone	Construction Work	Non-compliant - BPO adopted
Mar-17	Bell Road South Gracefield	Mechanical Plant (extraction system)	Borderline - difficult to assess and not sufficient to require more than BPO
Mar-17	Jackson Street Petone	Refrigerator Unit	Non compliant - BPO adopted
Feb-17	Seaview Road Seaview	Scrap Metal Loadout	Compliant and adopting BPO
Feb-17	Barnes Street Seaview	Scrap Metal Loadout	Technical Non Compliance but not enforceable (1.5dBA above limit)
Jan-17	Walter Nash Stadium	Music Concert	Compliant with Temp Activities Noise Rule
Dec-16	Hutt Road Petone	Child Care Centre	Compliant
Dec-16	McEwan Park, Marine Parade, Petone	Music Concert	Too windy to obtain useful results, but appeared to be compliant with Temp Activities Rule
Jul-16	Westminster Road Wainuiomata	Wind Turbine Generator	Non-compliant
May-16	The Strand Wainuiomata	Band Noise	Non-compliant
Nov-15	Port Road Seaview	Port Road Drag Race Event	Compliant with Temp Activities Noise Rule
Oct-15	Port Road/Meachen Street, Barnes Street Seaview	Sprint Car Event	Compliant with Temp Activities Noise Rule
Oct-15	George Street Stokes Valley	Panelbeater's Compressor	Compliant
Jun-15	Taita Netball Courts	Netball siren	"Compliant" - no DP noise rule for recreational but noise level reasonable
Jun-15	Karimu Street Stokes Valley	Noise from School Hall	Compliant with Temp Activities Noise Rule
May-15	Page Grove Wingate	Rifle Range	Compliant
Dec-14	Hutt Road Alicetown	Bar Concert	Technical non -compliance 1.6 dBA above limit
Sep-14	Waterloo Road Waterloo	Dance Studio	Technically non compliant, however high background level makes enforcement difficult - s16 applied
May-14	Pilmuir Street Boulcott	Mechanical plant (refrigerator units)	Remedial works undertaken to achieve compliance.
Feb-14	Makaro Street Eastbourne	Fire Siren	Exempt - however work undertaken to reduce noise due to children's classroom being 8m away
Jul-13	Wainui Road Waiwhetu	Childcare Noise	Hammering activity by children non compliant - activity ceased
Apr-13	Wainui Road Waiwhetu	Internal Plant	Technical Non Compliance but not enforceable (1dBA above limit)
Mar-12	Victoria Street Alicetown	Compressor	Compliant
Aug-11	Brunswick Street Central Hutt	Commercial Fans	Non compliant - remedial works undertaken in order to comply
Jul-10	Sydney Street Petone	Commercial Fan	Survey indicated compliance
Historical	Seaview Wharf	Pumping fluids to tank farm	Complaints are very rare now.

APPENDIX C

2020 Traffic Noise Measurements At Four sites In Lower Hutt

7 Harbour View Road

Existing noise levels survey details

Parameter	Setting/source
Operator	Edmond Wu
Address	7 Harbour View Road
Equipment details	Convergence Type 1 SLM Serial Cnp2pt2S018dLnSy2DRND
Measurement dates	14 Monday to 22 Tuesday December 2020
Observation	Traffic noise on Harbour View Road being dominant source of noise in the area with audible vegetation noise in breaks of traffic

Summary of noise levels survey results – $L_{Aeq(15min)}$ and $L_{A10(15min)}$

Time	Existing Noise Levels		
	Range	dB $L_{Aeq(15min)}$	dB $L_{A10(15min)}$
Daytime 7:00am – 10:00pm	Lowest	50	50
	Average	62	66
	Highest	69	72
Night-time 10:00pm – 7:00am	Lowest	39	40
	Average	54	55
	Highest	65	66

Summary of noise levels survey results – $L_{Aeq(24h)}$

Date	dB $L_{Aeq(24h)}$
15 December 2020	61
16 December 2020	61
17 December 2020	61
18 December 2020	61
19 December 2020	60
20 December 2020	59
21 December 2020	60
Average	61


Noise levels survey location



Photographs of noise levels survey position



Measured Existing Noise Levels at 7 Harbour View Road 14 December (Monday) to 22 (Tuesday) December 2020

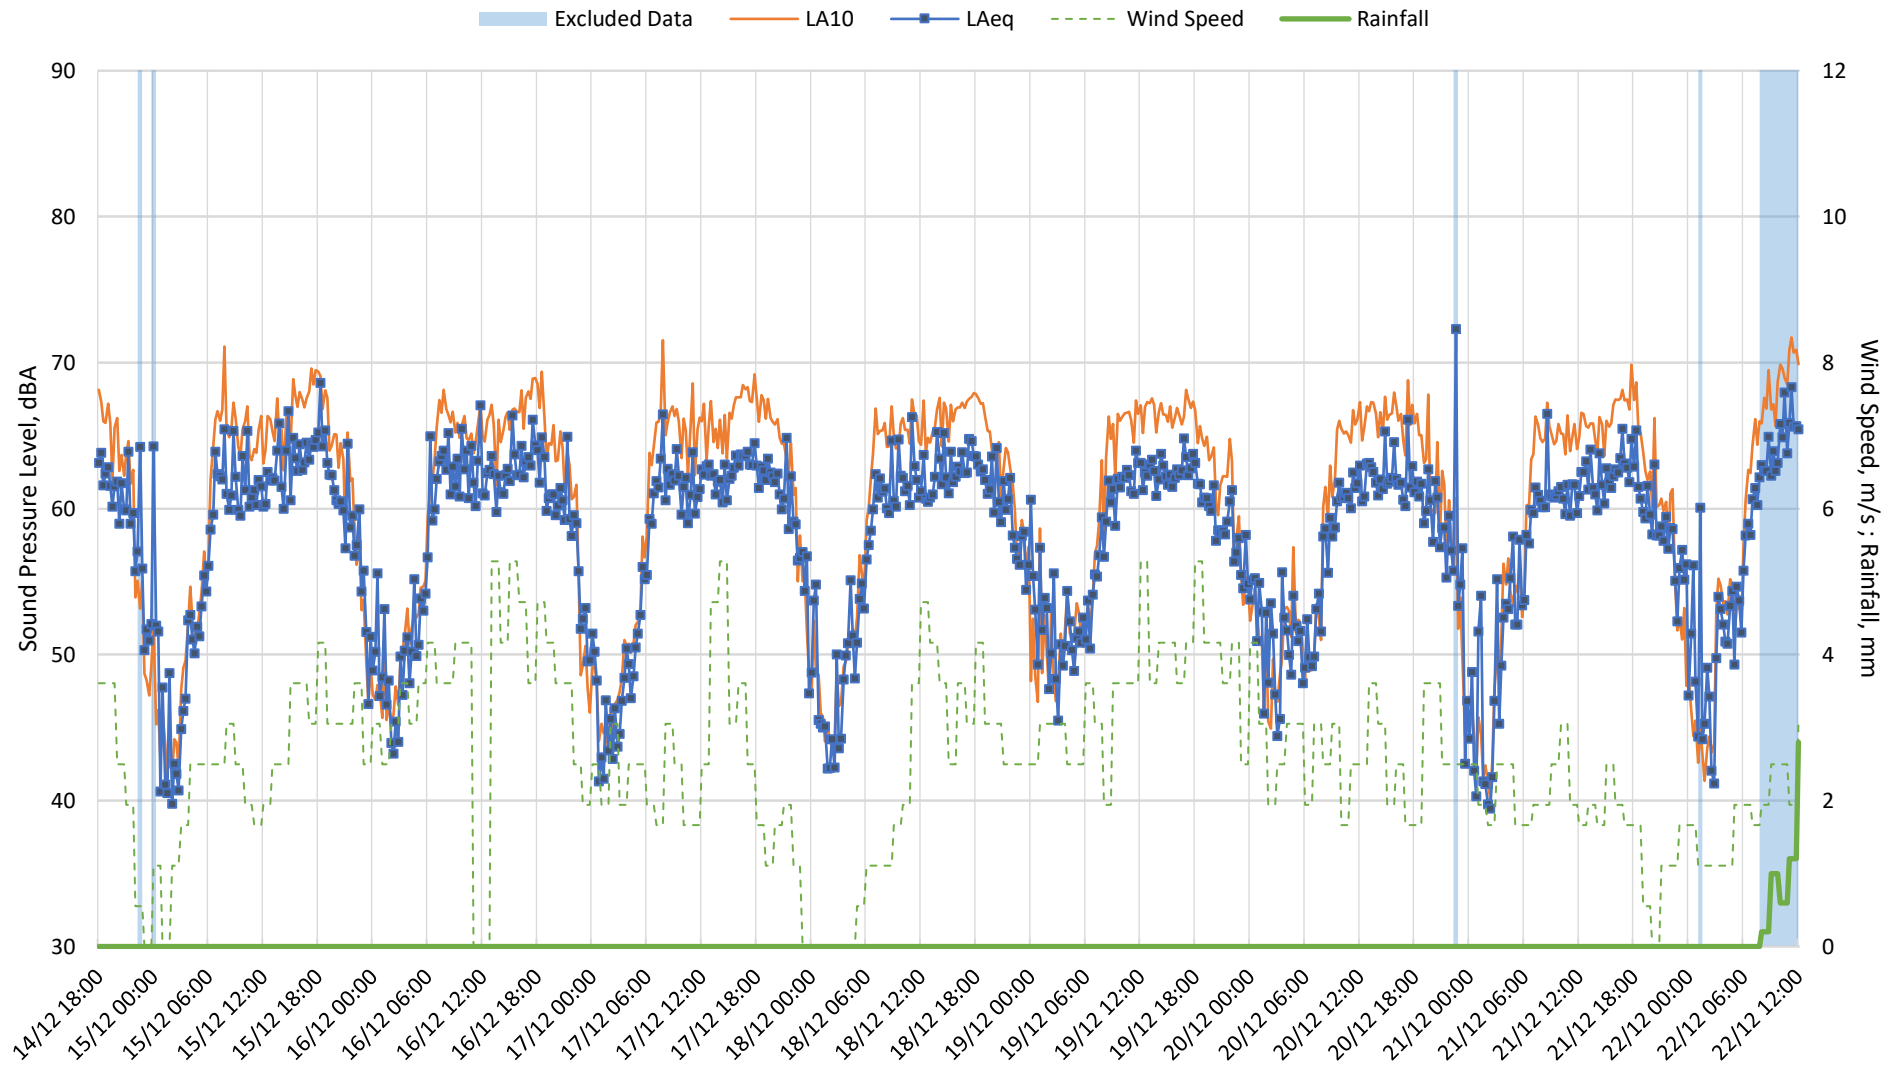

Note: Anomalous and weather affected measurement results have been excluded in the determination of the acoustic parameters

17 Tirohanga Road

Existing noise levels survey details

Parameter	Setting/source
Operator	Edmond Wu
Address	17 Tirohanga Road
Equipment details	Convergence Type 1 SLM Serial CNNer30Qed81KDvAawrRPD
Measurement dates	14 Monday to 22 Tuesday December 2020
Observation	Traffic noise on State Highway 2 being dominant source of noise in the area with occasional traffic noise on Tirohanga Road

Summary of noise levels survey results – $L_{Aeq(15min)}$ and $L_{A10(15min)}$

Time	Existing Noise Levels		
	Range	dB $L_{Aeq(15min)}$	dB $L_{A10(15min)}$
Daytime 7:00am – 10:00pm	Lowest	53	56
	Average	58	61
	Highest	63	66
Night-time 10:00pm – 7:00am	Lowest	43	45
	Average	53	56
	Highest	61	63

Summary of noise levels survey results – $L_{Aeq(24h)}$

Date	dB $L_{Aeq(24h)}$
15 December 2020	57
16 December 2020	57
17 December 2020	58
18 December 2020	57
19 December 2020	57
20 December 2020	56
21 December 2020	57
Average	57


Noise levels survey location



Photographs of noise levels survey position



Measured Existing Noise Levels at 17 Tirohanga Road 14 December (Monday) to 22 (Tuesday) December 2020

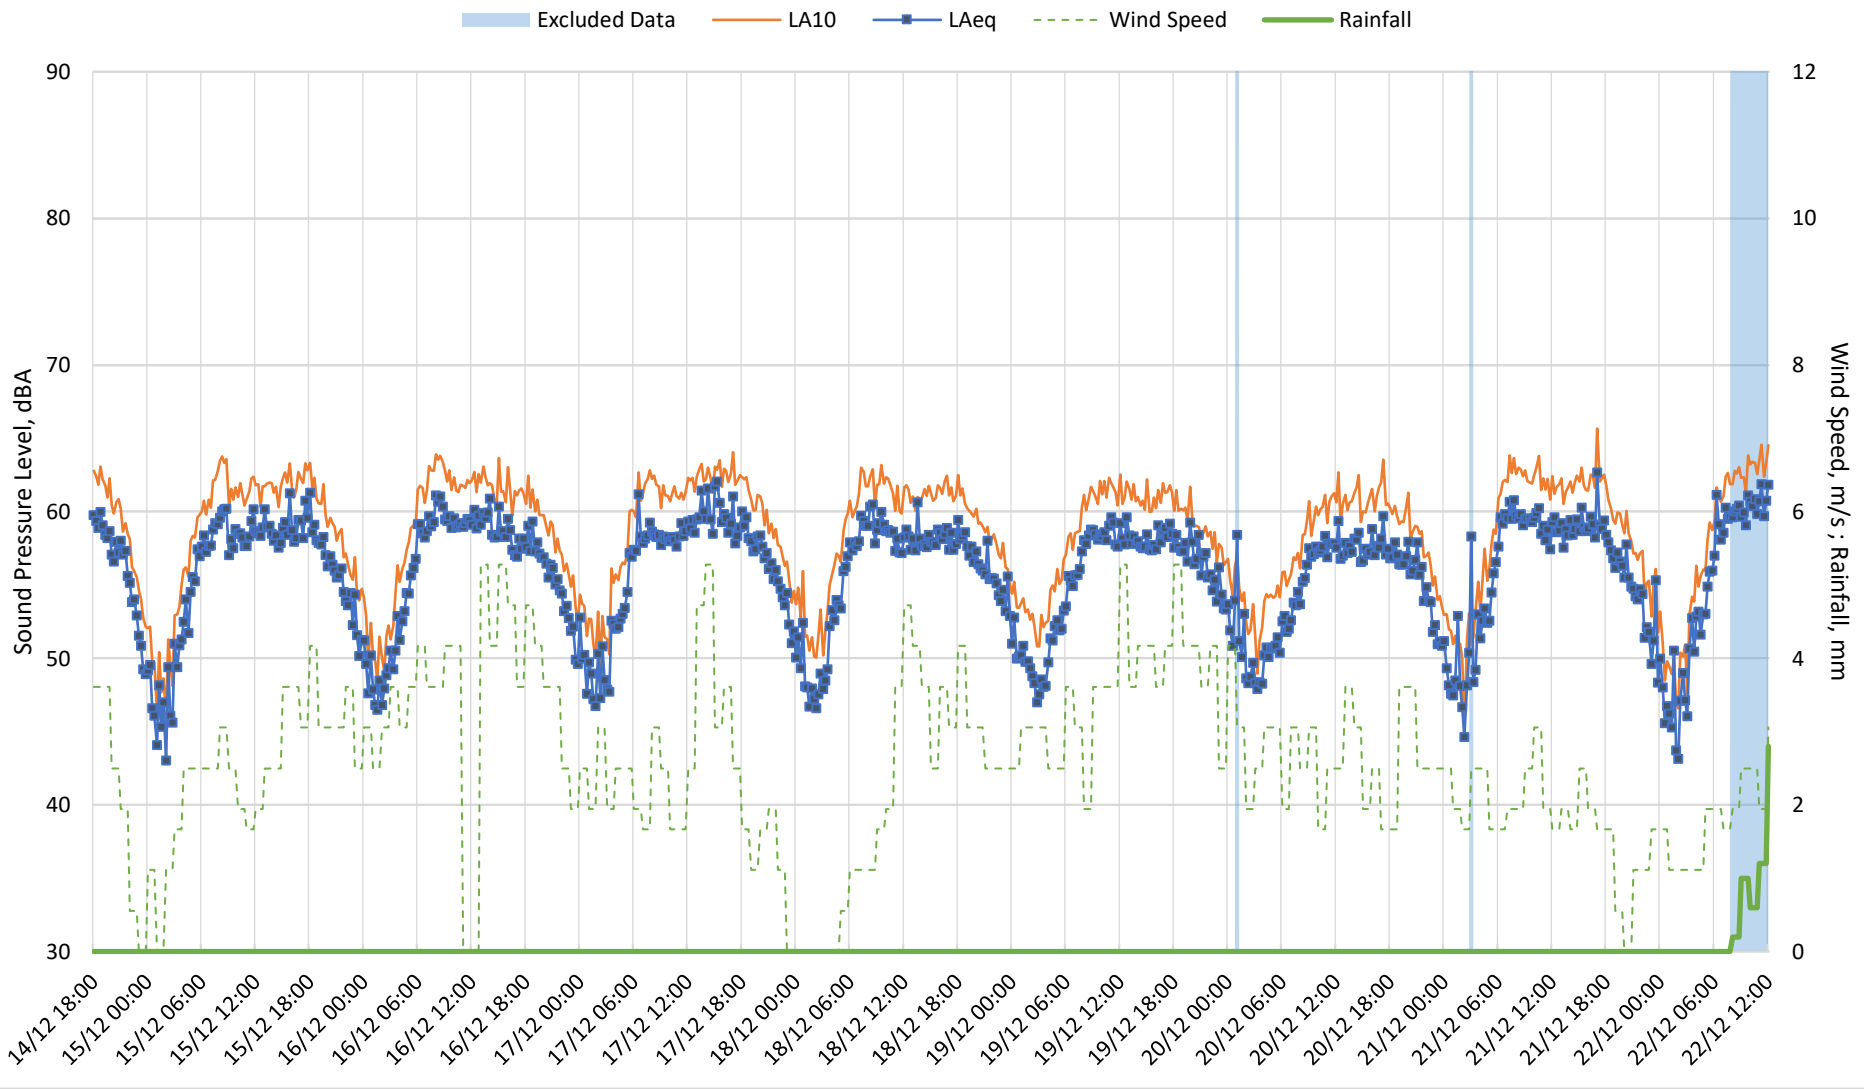

Note: Anomalous and weather affected measurement results have been excluded in the determination of the acoustic parameters

28 Rutherford Street

Existing noise levels survey details

Parameter	Setting/source
Operator	Edmond Wu
Address	28 Rutherford Street
Equipment details	Convergence Type 1 SLM Serial Atj0pvUa0f23Chtw60p5vD
Measurement dates	14 Monday to 22 Tuesday December 2020
Observation	Traffic noise on Melling Link and Rutherford Street being dominant source of noise in the area

Summary of noise levels survey results – $L_{Aeq(15min)}$ and $L_{A10(15min)}$

Time	Existing Noise Levels ¹		
	Range	dB $L_{Aeq(15min)}$	dB $L_{A10(15min)}$
Daytime 7:00am – 10:00pm	Lowest	58	62
	Average	68	70
	Highest	72	73
Night-time 10:00pm – 7:00am	Lowest	45	44
	Average	60	63
	Highest	69	71

Summary of noise levels survey results – $L_{Aeq(24h)}$

Date	dB $L_{Aeq(24h)}$ ¹
15 December 2020	66
16 December 2020	67
17 December 2020	66
18 December 2020	67
19 December 2020	66
20 December 2020	65
21 December 2020	66
Average	66

- Noise levels survey results presented as free-field noise levels by applying a façade correction of -2.5dB to the measured noise levels in accordance with NZS 6806.


Noise levels survey location



Photographs of noise levels survey position



Measured Existing Noise Levels at 28 Rutherford Street
14 December (Monday) to 22 (Tuesday) December 2020

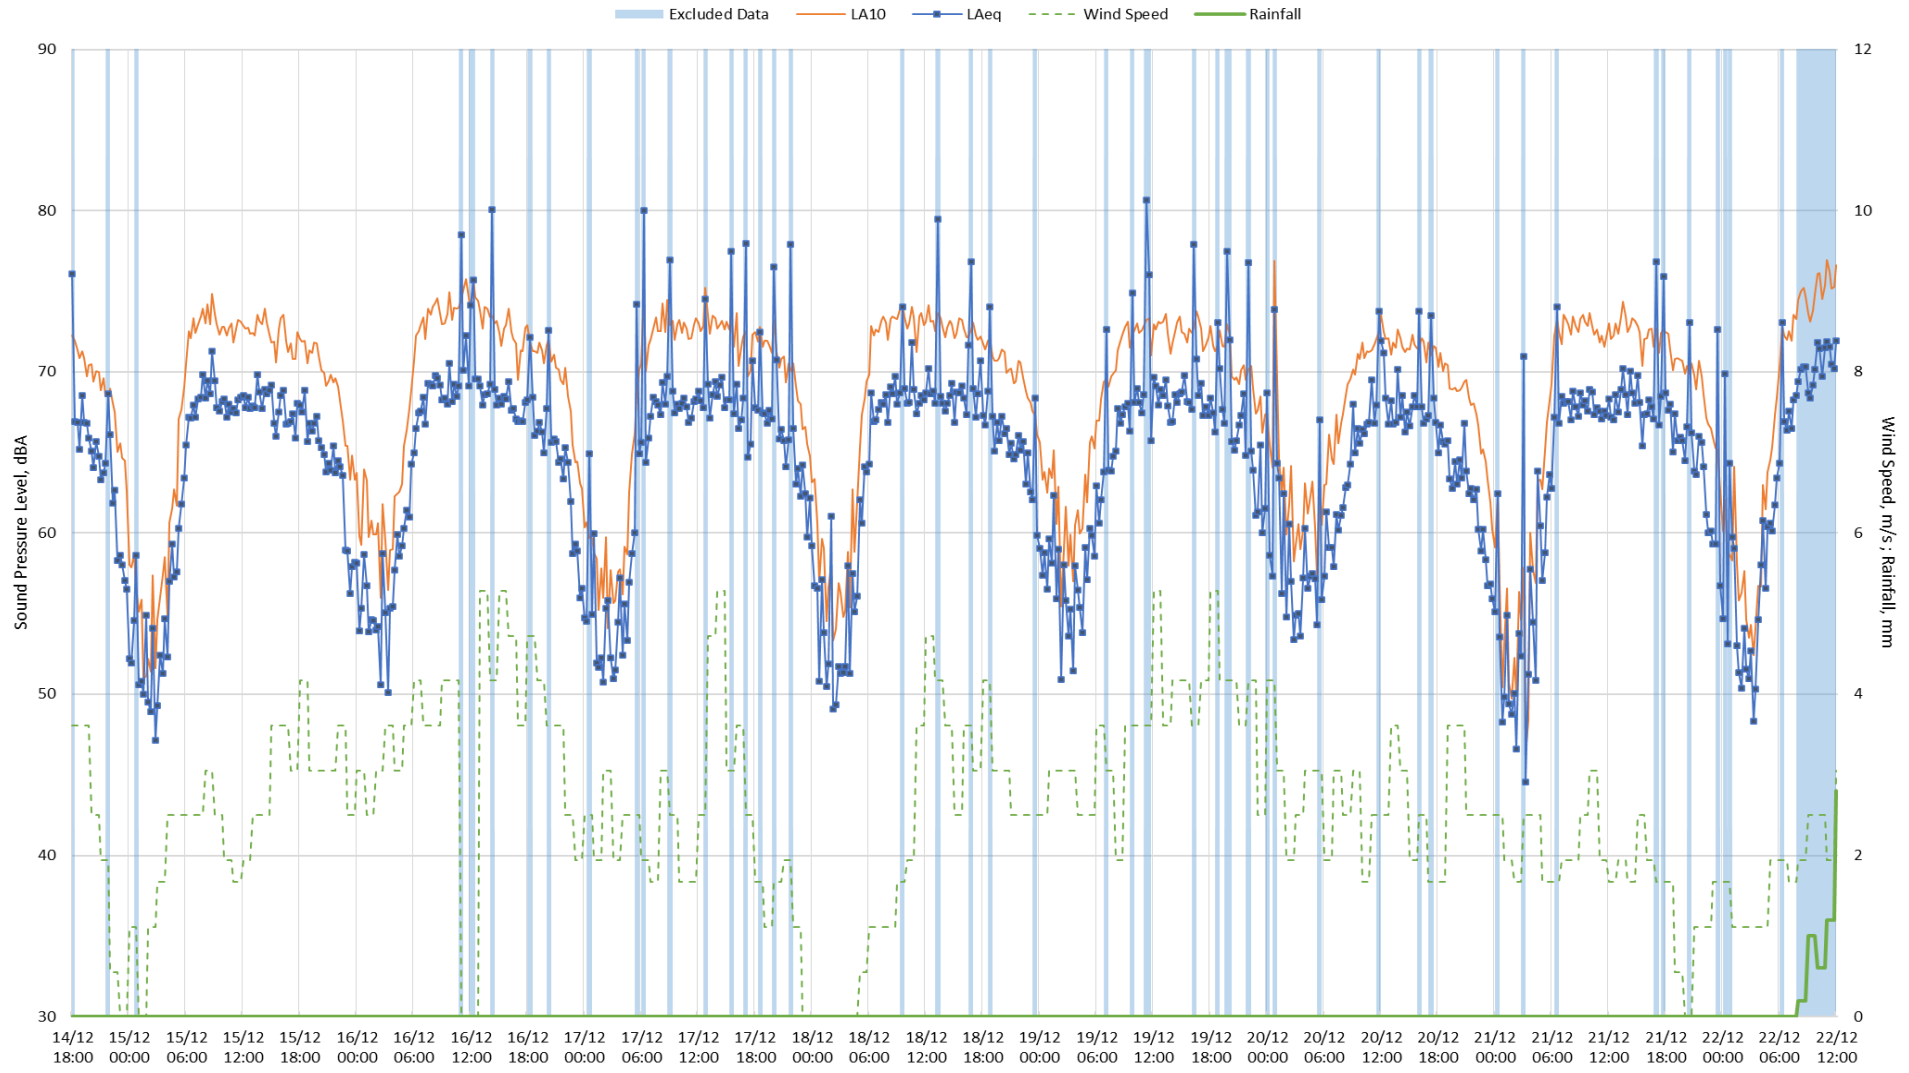

Note: Anomalous and weather affected measurement results have been excluded in the determination of the acoustic parameters

2 Pomare Road

Existing noise levels survey details

Parameter	Setting/source
Operator	Edmond Wu
Address	2 Pomare Road
Equipment details	Convergence Type 1 SLM Serial CFNUJ30aed2XIDtgS0pZND
Measurement dates	14 Monday to 22 Tuesday December 2020
Observation	Traffic noise on State Highway 2 being dominant source of noise in the area with occasional traffic noise on Pomare Road and Wairere Road

Summary of noise levels survey results – $L_{Aeq(15min)}$ and $L_{A10(15min)}$

Time	Existing Noise Levels		
	Range	dB $L_{Aeq(15min)}$	dB $L_{A10(15min)}$
Daytime 7:00am – 10:00pm	Lowest	64	66
	Average	71	74
	Highest	74	77
Night-time 10:00pm – 7:00am	Lowest	55	47
	Average	66	70
	Highest	72	75

Summary of noise levels survey results – $L_{Aeq(24h)}$

Date	dB $L_{Aeq(24h)}$
15 December 2020	70
16 December 2020	70
17 December 2020	70
18 December 2020	70
19 December 2020	70
20 December 2020	69
21 December 2020	70
Average	70


Noise levels survey location



Photographs of noise levels survey position



Measured Existing Noise Levels at 2 Pomare Road 14 December (Monday) to 22 (Tuesday) December 2020

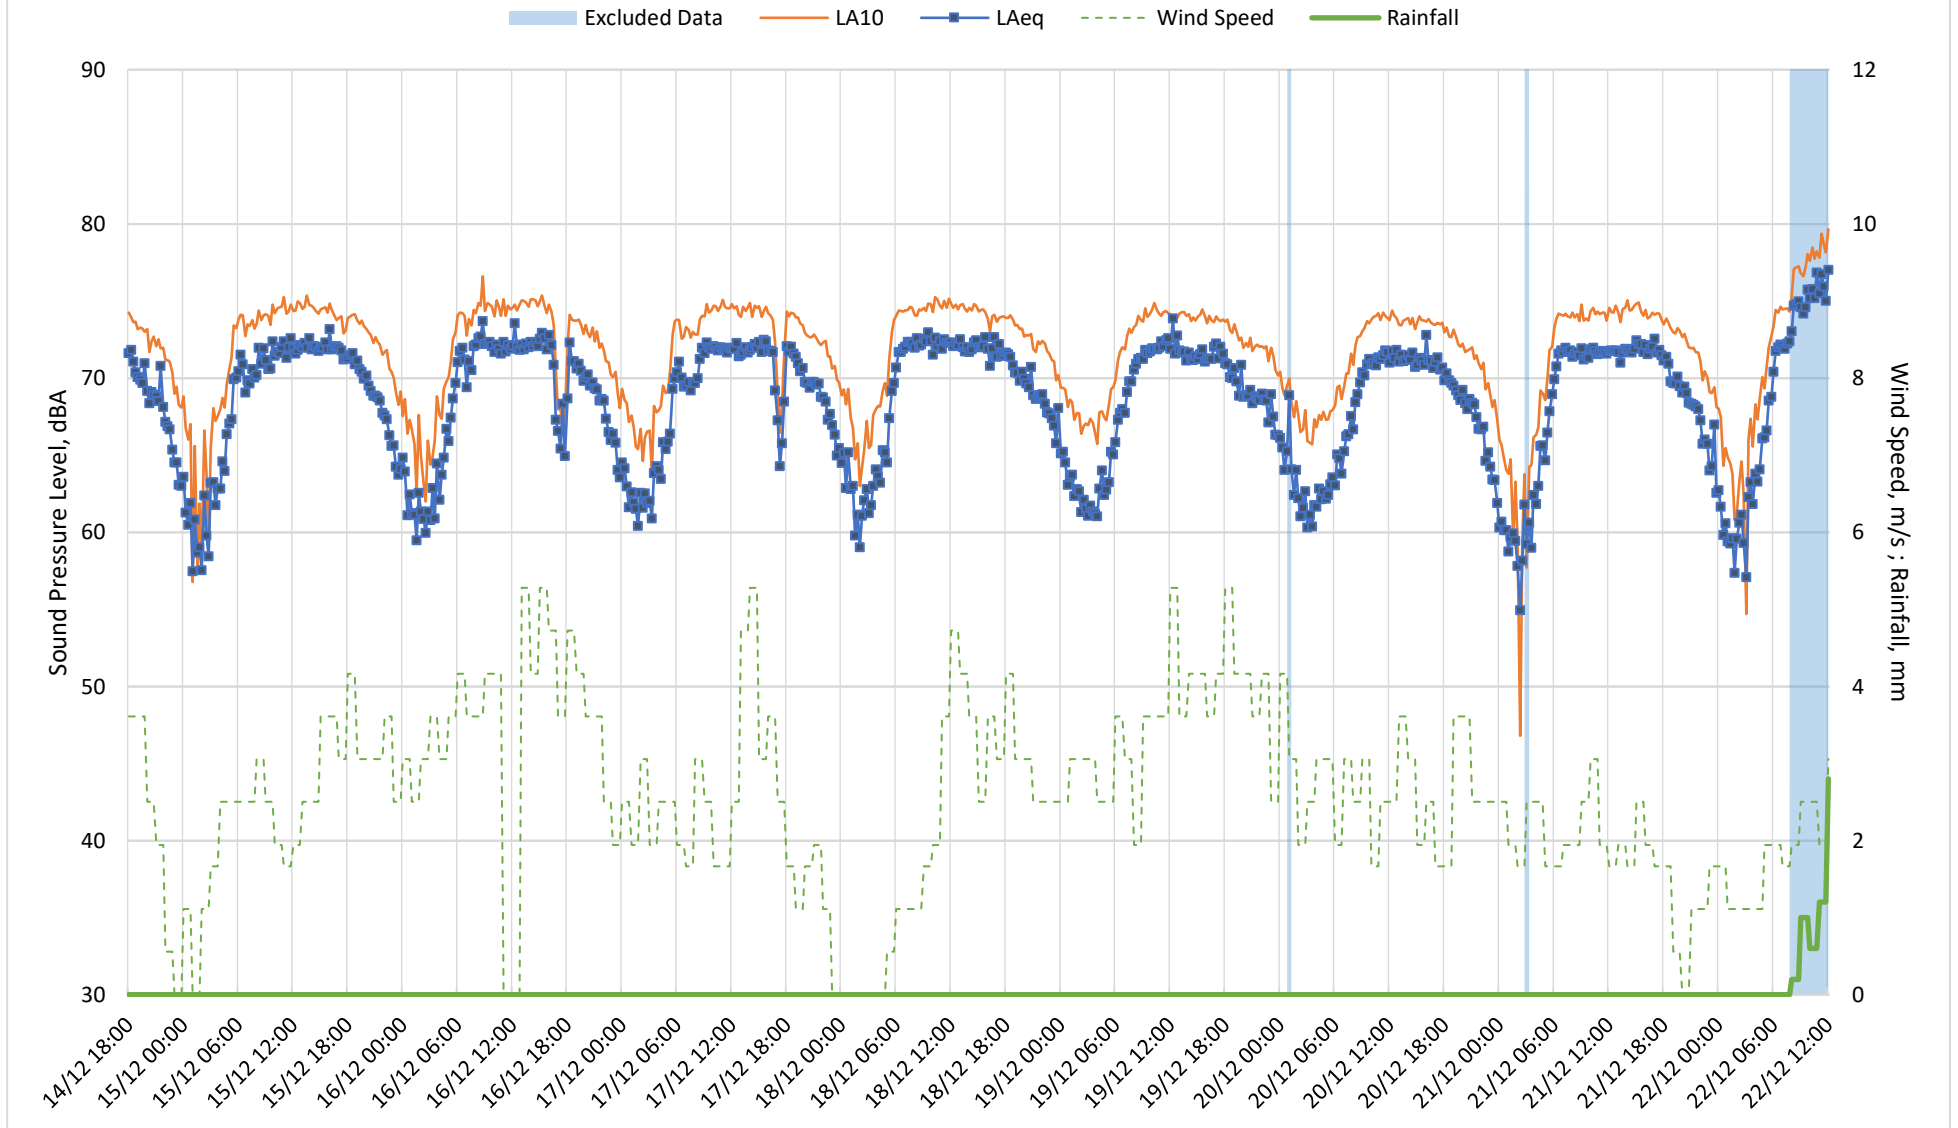

Note: Anomalous and weather affected measurement results have been excluded in the determination of the acoustic parameters

**10.2 Attachment 2: Recommended State
Highway & Wairarapa Rail Line Noise
Overlays for Reverse Sensitivity Noise
Protection Measures - Hutt City
Proposed District Plan – Malcolm Hunt
Associates.**

MalcolmHuntAssociates



P O Box 11-294, Wellington 04 472 5689 mha@noise.co.nz

Date of Issue:	12 September 2024
Memo To:	Planning Manager Hutt City Council c/- Stephen Davis Senior Policy Planner
Project:	Recommended State Highway & Wairarapa Rail Line Noise Overlays For Reverse Sensitivity Noise Protection Measures - Hutt City Proposed District Plan
Document Prepared By:	Malcolm Hunt

Recommended State Highway & Wairarapa Rail Line Setback Distances

Stephen,

As requested, we have investigated suitable setback distances for application of 'High Noise' and 'Moderate Noise' reverse sensitivity noise provisions being developed for the Proposed Hutt District Plan.

As you are aware, currently Standard 6 of Chapter 14 A Transportation of the operative district plan sets a 40-metre wide State Highway and Railway Corridor Buffer Overlay within which all new buildings containing noise sensitive activities (or existing buildings with new noise sensitive activities) must be designed, constructed and maintained to meet a stated indoor noise level.

Work completed thus far towards the new district plan has established that reverse sensitivity noise effects of state highway 2 and the Wairarapa rail line be dealt with via rules requiring acoustic insulation and ventilation for new or altered buildings housing noise-sensitive activities located within a defined the Highway High/Moderate Noise Overlay or Railway High/Moderate Noise Overlay.

The proposal is to replace the blanket 40 metre wide corridor currently adopted in the operative district plan planning maps for both highway noise and rail noise with a more bespoke overlay more accurately reflecting the current and future levels of noise likely to be experienced within these corridors. The extent of the proposed overlays have been based on not only on expected noise levels but also the degree of acoustic protection afforded by the proposed acoustic insulation (and ventilation) standards for new or altered buildings locating in these overlay areas.

The overall outcome intends that indoor noise effects on occupants of buildings housing noise-sensitive activities within the overlay areas would be consistent with both national guidelines (e.g. NZ Standard NZS2107:2000 *Acoustics—Recommended design sound levels and reverberation times for building interiors*) and international guidelines (e.g. World Health Organization *Guidelines for Community Noise* edited by Berglund *et al* 1999).

State Highway Noise

Highway noise emissions vary as a function of daily traffic volumes, percentage heavy vehicles in the traffic stream, vehicle speed and road surface. Noise emissions from state highway 2 have been

examined in terms of a published information on measured and predicted traffic noise levels at selected residential sites carried out in 2020 undertaken as part of the RiverLink Project¹.

State Highway – Recommendations for High Noise Overlay


Information from the RiverLink noise studies indicates outdoor traffic noise levels currently measure up to 70 dB LAeq(24 hr) at unshielded sites located within 40 metres of state highway 2. At distances closer than 40 metres indoor noise levels within habitable rooms insulated to achieve Dtr,2m, nTw >35 dB (proposed standard NOISE-S5 for high noise areas) would result in internal noise levels of LAeq(24 hr) 35 to 40 dB. This is an acceptable indoor noise standard as, due to diurnal distribution of traffic flow, noise levels during the critical time period would measure 10 dB below the 24hour average (i.e. 25 to 30 dB during night time hours). It is noted that this outcome would be an improvement compared to the LAeq(24 hr) 45 dB indoor noise standard stipulated for habitable rooms located within the 40-metre wide State Highway Corridor Buffer Overlay of Chapter 14C – Appendix Standard 6 of the operative district plan.

State Highway – Recommendations for Moderate Noise Overlay

Given the above recommendation for state highway ‘high noise overlay’, the closest point of the proposed moderate highway noise overlay would be 40m from the highway. The outer extent of this overlay is to be determined from NZTA noise predictions that have been promised by NZTA based on the location of the LAeq(24 hr) 55 dB contour. Should this contour location not be forthcoming, we recommend the Moderate Noise Area extend no greater than 100 metres from the highway.

Rail Noise - Recommendations for High Noise Overlay

Rail noise emitted by the Wairarapa Rail Line have been measured during the 2021 Hutt City Ambient Noise Survey carried out by Malcolm Hunt Associates. Measurements undertaken at 20 metres from the rail line over representative 24 hour period at Ava Park, adjacent to Hutt City’s Water Treatment Plant resulted in the following 24 hour time-varying noise levels (showing peaks due to individual train pass-bys):

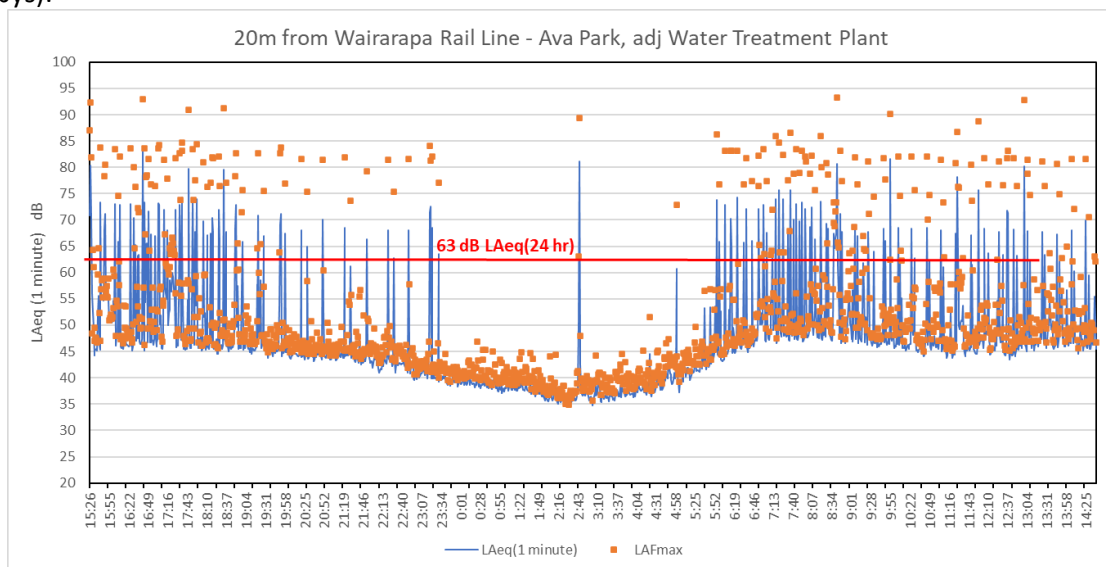

¹ RiverLink is a partnership between Hutt City Council, Greater Wellington Regional Council (Greater Wellington) and Waka Kotahi NZ Transport Agency (Waka Kotahi) investigating roading improvements and flood protection works near the Melling Interchange in Lower Hutt.


The summary results for this representative site located 20 metres from the rail line were found to be;

LAeq(24 hr) = 63 dB
 LAeq(DAY) = 64 dB
 LAeq(NIGHT) = 58 dB

These result indicate that at distances closer than 40 metres indoor noise levels within habitable rooms insulated to achieve $D_{tr,2m}, n_{Tw} > 35$ dB (proposed standard NOISE-S5 for high noise overlay) would result in internal noise levels of LAeq(24 hr) 25 to 30 dB. This is well within acceptable standards of indoor rail noise. Noise levels during the critical time period would measure 23 dB to 28 dB. Based on this finding we recommend the outer extent of the Rail Noise High Noise Overlay should be located 20 metres from the rail line (expected rail noise level LAeq(24 hr) 60 dB).

Rail Noise – Recommendations for Moderate Noise Overlay

Given the above recommendation for ‘high noise areas’, the closest point of the proposed moderate rail noise overlay would be 20m from the rail line. The outer extent of this overlay can be determined from rail noise measured during the 2021 ambient noise survey at a location 40 metres from the rail line at 3/86 North Street, Ava. The following time-varying 24 hour noise levels were measured at this site (showing peaks due to individual train pass-bys):

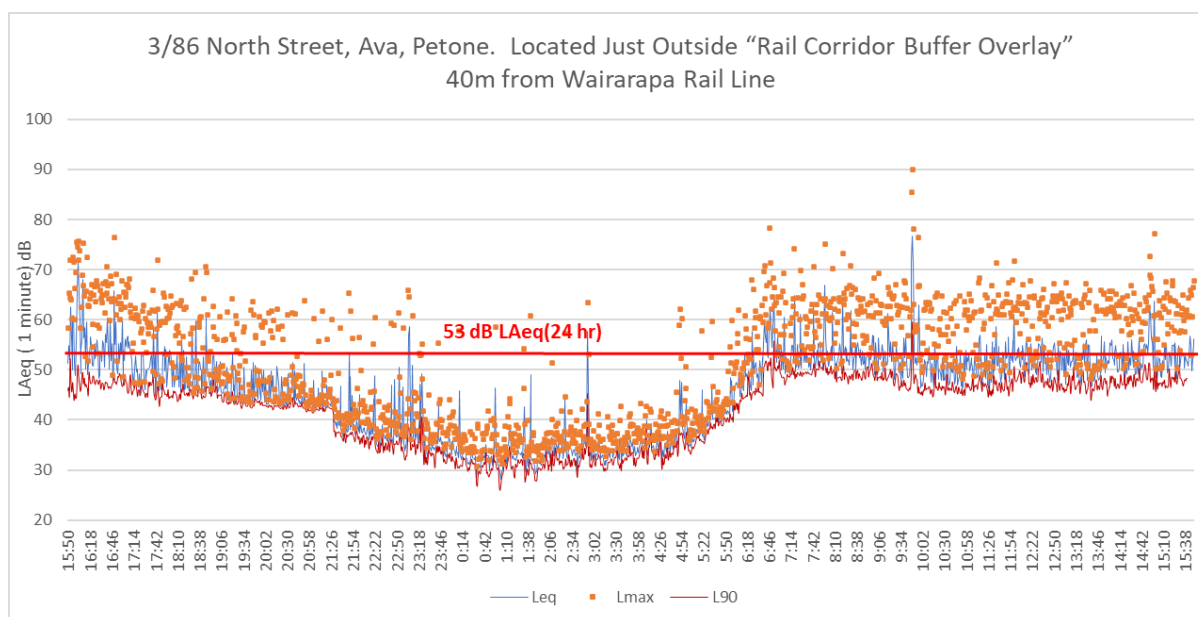

The summary results for this representative site located 20 metres from the rail line were found to be;

LAeq(24 hr) = 53 dB
 LAeq(DAY) = 55 dB
 LAeq(NIGHT) = 46 dB

Based on a typical level of LAeq(24 hr) 53 dB we recommend the outer extent of the Moderate Rail Noise Overlay be located 40 metres from the rail line. This is equivalent to the 40-metre Rail Corridor Buffer Overlay of Chapter 14C (Appendix Standard 6) of the operative district plan.

Summary Recommendations

In summary, we recommend the following separation distances for the High and Moderate Noise overlays for use in the Proposed District Plan;

Noise Source	Outer extent of High Noise Overlay	Outer Extent of Moderate Noise Overlay
State Highway 2 Noise	40 m from highway	As per NZTA contour, else 100m from highway
Wairarapa Line Rail Noise	20m from closest rail ine	100m from closest rail line

Please do not hesitate to contact the writer should you require any further information.



Malcolm Hunt

B.Sc. M.E.[mech], Dip Pub. Health. RSH Dip. Noise Control

10.3 Attachment 3: State Highway Noise Control Boundary Overlay – Chiles Ltd.

FINAL DRAFT

Chiles Ltd

MEMORANDUM

From: Stephen Chiles
To: Mike Wood, Waka Kotahi
Date: 23 March 2023
Subject: State highway noise control boundary overlay

Introduction

This memorandum sets out details of how Waka Kotahi has prepared a draft noise control boundary overlay for the national state highway network based on noise modelling, and the checks and amendments required before implementation of that overlay in each district. Comments are also made on the limitations of using such as overlay based on modelling.

Calculation of noise contours

The proposed noise control boundary overlays are based on national road-traffic noise modelling by AECOM. That modelling work was undertaken as part of a broader research project "*Social cost (health) of land transport noise exposure*". In this formal research programme, the work was subject to internal review, steering group review and independent peer review. At the time of preparing this memorandum the final research report from that project has not been published but is understood to be complete and undergoing final editorial review. The research report will be available on the Waka Kotahi website once finalised/published.

The following table sets out the modelling details understood to have been used by AECOM. These details should be confirmed in the research report although there might be some minor variations.

Table 1 – AECOM noise modelling details (subject to confirmation by research report)

Primary modeller	Lee Evans, AECOM
Software	SoundPLAN v8.2
Calculation algorithm	UK Calculation of Road Traffic Noise
Calculation area	600 metres either side of all highway and arterial centrelines
Parameter	$L_{Aeq(24h)}$ (taken as $L_{A10(18h)} - 3$ dB)
Sound contour grid	Free-field, 10 m spacing, 1.5 m high
Ground absorption	Urban environments – 0.6 Rural environments – 1
Date of input datasets	2021 (generally reflecting 2020/21 conditions)
Road centrelines	CoreLogic National Road Centreline dataset (x/y) DEM (z)
Traffic volumes (AADT)	CoreLogic National Road Centreline dataset 24h traffic data entered in CRTN as 18h traffic
Heavy vehicles (%HV)	CoreLogic National Road Centreline dataset
Speed	CoreLogic National Road Centreline dataset Posted speed limit

Road surface	Surface types as recorded in Waka Kotahi RAMM database Surface corrections in accordance with Waka Kotahi <i>Guide to state highway road surface noise</i> , including a -2 dB correction from CRTN to a reference AC-10 surface.
Bridge locations	CoreLogic National Road Centreline dataset Height interpolated from start and end points
Terrain	LIDAR where available NZ School of Surveying 15 m nationwide DEM in other areas Data combined in GIS to produce 1 m×1 m DEM for noise model
Building footprints	LINZ NZ Building Outlines dataset
Building heights	Where available, calculated from DSM median height minus DEM median height, otherwise: 6 m residential / 8 m commercial
Noise barriers	None modelled

Of note in this table is that the modelling was for highways and other arterial roads in a combined dataset. This has resulted in 'stubs' and other artefacts in the proposed overlay where there are noise contours due to other arterial roads (not highways) in proximity to a highway (within 100 m).

From the AECOM noise modelling the 54 and 55 dB $L_{Aeq(24h)}$ contours (polygons extending around highways and other arterial roads) have been used for subsequent GIS processing. The distance of the contours (and subsequent overlay) from a highway depends on numerous factors included in the modelling, with key parameters being:

- Traffic volume
- Traffic composition (percentage of heavy vehicles)
- Traffic speed
- Road surface
- Road geometry
- Screening by terrain or buildings
- Relative height of highway and surrounding land

These parameters are constantly changing, which results in the contours being at a variable distance from a highway along its length. Notably, the contours are generally smaller around highways with lower traffic volumes, although that effect is often partly offset by differences in road surfaces with lower volume highways more likely to have noisier chipseal surfaces. For busier highways the contours are often further than 100 metres from the road, but the extent of the noise overlay has been capped at 100 metres by the GIS processing.

GIS processing of noise contours

The proposed noise control boundary overlay has been developed based on the modelled noise contours with some additional GIS processing. This additional processing is to make some allowance for uncertainty in the modelling and to reduce the influence of artefacts due to the modelling method and limitations of input data. At a national level the GIS processing summarised in Table 2 has been undertaken by Waka Kotahi.

Table 2 – national GIS processing details

Primary operator	Stewie He, Waka Kotahi
Software	ArcGIS
Base noise contour	54 dB $L_{Aeq(24h)}$ (representing 57dB with 3 dB allowance)
Smoothing	PAEK method - 50m tolerance - one-sided barrier of 55 dB $L_{Aeq(24h)}$ contour
Overlay limits	- no closer than 25m to a centreline (approximating 20m to an edgeline) - no further than 105m from a centreline (approximating 100m from an edgeline)
Holes	All holes in contour less than 5000m ² filled
Islands	All islands outside contour less than 1000m ² removed

The 3 dB allowance made by using the 54 dB $L_{Aeq(24h)}$ contour provides a relatively small degree of tolerance for factors including:

- Inherent modelling uncertainty associated with the calculation algorithm
- Uncertainty associated with input datasets and national modelling without detailed ground truthing and checking at a localised level
- Normal changes in road and traffic conditions such as from routine resurfacing and traffic growth or composition change

In reality, the uncertainty from these factors far exceeds 3 dB, but that has been adopted as a compromise value. For example, just the first factor of calculation method uncertainty is around +/- 2dB close to the road and say double that at greater distances. Without adequate allowance for uncertainty, many buildings that might theoretically comply with the internal noise criterion but would actually exceed it immediately on construction, and many other buildings would exceed the criterion over following years.

It is noted that the allowance for uncertainty in preparing the overlay needs to be consistent with the corresponding rules applying within the overlay (otherwise neither function effectively).

The limitation for the overlay not to extend further than 100 metres from highways is a policy position that Waka Kotahi has adopted since it first standardised its approach to this issue in 2007. Technically there are noise effects that warrant control beyond 100 metres near busier highways, but the limitation has been made as a compromise to address the most significant effects without applying controls over an extended land area.

Following the national processing, the draft overlay is subject to additional verification by Waka Kotahi planning and environmental staff before potential use in each district. Currently, this has been completed for a small number of districts and others are in process. Manual alterations are made to the overlay for each district by the Waka Kotahi GIS team as required. The following matters are checked by desk-top inspection of the overlay along all highways in a district and are corrected as required:

- The overlay is extended around any sections of highway where it is absent from the modelling, generally at a fixed distance of 105 m from the centreline. This can occur

because the highway did not exist at the time of the modelling or because of missing road or traffic data in the modelling.

- Any large anomalies caused by contours around other arterial roads are removed.
- The overlay is removed from any highways that have been revoked or are in the process of being revoked.
- The overlay is extended around any unimplemented highway designations, generally at a fixed distance of 100 metres from the designation boundary.
- If the extent of the overlay is limited by the scope of a particular RMA process then it is restricted to the relevant spatial limits. For example, the overlay might only apply to certain zones or the furthest distance the overlay extends from highways might be capped at a value less than 100 metres.

Once processed the noise control boundary overlay for a district is made available initially on a web map. Access required to the web map (i.e. specific parties or public) is to be determined by the relevant Waka Kotahi planner. When required a GIS file will be provided for inclusion in the district plan maps. Waka Kotahi will also maintain a collated map of the final overlays adopted in each district.

Limitations of an overlay based on noise modelling

There are numerous intricacies associated with noise modelling that could be relevant to use of a noise contour as the basis for an overlay. However, the following points have particular impact on the use of model outputs in this context:

- Widescale national noise modelling is constrained by the quality and availability of input data in a suitable format for terrain, buildings and roads. This is different to modelling for a discrete roading project over say 10 to 20 kilometres, where it is practical to spend time checking and adjusting data, such as through ground truthing. Also, for individual projects, specific high resolution terrain data can be obtained if it does not already exist. It is not practical to apply the same processes to modelling 11,000 kilometres of the national state highway network. Therefore, while applying the same calculation algorithms, because the input data is constrained, national modelling is subject to greater uncertainties and inaccuracies than discrete project modelling.
- Modelling includes noise screening by buildings in the available dataset at that point in time. This is beneficial for land use controls as it means that if a site is screened from state highway noise by buildings on other sites the contour would be smaller and it might exclude that site such that it would not be subject to the controls. However, this approach does not account for changes to buildings post-modelling. For example, screening by an existing building on a site might result in noise contours excluding most of the site, including in the footprint of that building. If the existing building is removed, then new buildings on the site might be outside the relevant contour even though they may have high noise exposure warranting building treatment.

- The modelling is only for a single height above ground level (1.5 metres), intended for single storey buildings. Noise exposure is often higher at higher elevations due to a reduction in screening by other buildings or the terrain.
- As for buildings, the modelling is based on road and traffic conditions at a certain point in time (2020/2021). These parameters commonly change (e.g. resurfacing as part of routine maintenance) and can increase the extent of noise exposure. However, an overlay based on modelling would be fixed to the previous conditions so land use controls might exclude sites with noise exposure warranting building treatment at the time of development.

Waka Kotahi has proposed using an overlay based on noise contours as it can reduce the area over which land use controls apply and thus avoids a requirement for compliance assessment on some sites, which are likely to have lower noise exposure but would otherwise have been captured within a fixed distance. However, the above limitations of this approach mean that it will also exclude many sites where controls are warranted, particularly in urban areas where screening effects and higher buildings are more likely.